


RECOMMENDED PANEL CUTOUT

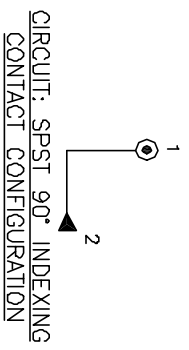

SWITCH FUNCTION	
POS 1	POS 2
↶	↷
DNF	(DN)

- NOTES:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 - TERM. NOS. FOR REFERENCE ONLY.
 - RATING: 1A @125VAC, 0.5A @250VAC
 - CONTACT RESISTANCE: 10mILLI-OHMS
 - DIELECTRIC STRENGTH: 1000 VAC-1Minute
 - INSULATION RESISTANCE: 200 Mega-OHMS min.
 - MATERIALS:
 - HOUSING: ZINC ALLOY DIE CAST
 - CYLINDER: ZINC ALLOY W/CHROME PLATING
 - TERMINAL AND CONTACTS: SILVER PLATED
 - KEYS (2) KEY CODE 701: TUBULAR
ZINC ALLOY, CHROME PLATING

- LEGEND
- =Detent Positions
 - ⊙ =Key pull possible in these positions
 - ▲ =MOMENTARY POS.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12768	RELEASED FOR PRODUCTION	1/27/03	CJB
B	12768	DESC WAS WRONG	1/29/03	CJB

SCALE	DATE	DR	DWG	REV
1.5:1	1/27/03	CJB	K100206	B

E-SWITCH®

K0103E-701

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED