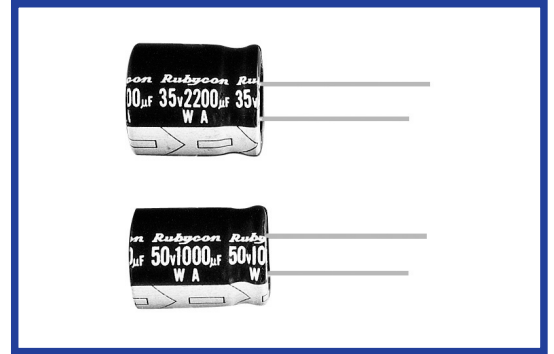


WA SERIES
85°C Low profile.
◆FEATURES

- 9~25mm height.
- RoHS compliance.


◆SPECIFICATIONS

Items	Characteristics																																																														
Category Temperature Range	-40~+85°C	-25~+85°C																																																													
Rated Voltage Range	6.3~250V.DC	350~450V.DC																																																													
Capacitance Tolerance	±20%(20°C, 120Hz)																																																														
Leakage Current(MAX)	6.3~50V.DC	160~450V.DC																																																													
	I=0.01CV or 3µA whichever is greater. (After 2 minutes application of rated voltage)	CV≤1000																																																													
		CV>1000																																																													
I=0.1CV+40µA (1minute) I=0.03CV+15µA (5minutes) I=0.04CV+100µA (1minute) I=0.02CV+25µA (5minutes)																																																															
I=Leakage Current(µA) C=Capacitance(µF) V=Rated Voltage(V)																																																															
Dissipation Factor(MAX) (tanδ)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>(20°C, 120Hz)</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> </tr> </tbody> </table>											Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450	(20°C, 120Hz)	0.26	0.22	0.18	0.16	0.14	0.12	0.20	0.20	0.20	0.20	0.20	0.20																										
	Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450																																																		
(20°C, 120Hz)	0.26	0.22	0.18	0.16	0.14	0.12	0.20	0.20	0.20	0.20	0.20	0.20																																																			
When capacitance is over 1000µF, tanδ shall be added 0.02 to the listed value with increase of every 1000µF.																																																															
Endurance	After applying rated voltage with rated ripple current for 2000 hours at 85°C, the capacitors shall meet the following requirements.																																																														
	Capacitance Change	Within ±25% of the initial value.																																																													
	Dissipation Factor	Not more than 200% of the specified value.																																																													
Leakage Current	Not more than the specified value.																																																														
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>(120Hz)</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>3</td> <td>3</td> <td>3</td> <td>5</td> <td>5</td> <td>7</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>12</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>											Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450	(120Hz)	6	4	4	3	2	2	3	3	3	5	5	7	Z(-25°C)/Z(20°C)	12	10	8	6	4	3	-	-	-	-	-	-	Z(-40°C)/Z(20°C)												
	Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450																																																		
	(120Hz)	6	4	4	3	2	2	3	3	3	5	5	7																																																		
Z(-25°C)/Z(20°C)	12	10	8	6	4	3	-	-	-	-	-	-																																																			
Z(-40°C)/Z(20°C)																																																															
Z(-25°C)/Z(20°C)																																																															
Z(-40°C)/Z(20°C)																																																															

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)		60(50)	120	500	1k	10k≤
Coefficient	1.5~6.8µF	0.65	1.0	1.20	1.30	1.50
	10~68µF	0.8	1.0	1.20	1.30	1.50
	100~1000µF	0.8	1.0	1.10	1.15	1.20
	2200~10000µF	0.8	1.0	1.05	1.10	1.15

◆OPTION

	Code
PET Sleeve	EFC

◆PART NUMBER

□□□ WA □□□□□ M □□□ □□ D×L
 Rated Voltage Series Capacitance Capacitance Tolerance Option Lead Forming Case Size

