

RVIT 15-60 & 15-120i – Rotary Variable Inductance Transducers



- DC operation
- Non-contact design
- Infinite resolution
- Up to 120 degree sensing range
- $\pm 3\text{VDC}$ ratiometric or 4-20mA output
- $\pm 0.25\%$ linearity
- Size 15 servo or flange mount
- Anodized aluminum housing

DESCRIPTION

The **RVIT 15-60** and **RVIT 15-120i** are DC operated, non-contact, angular position sensors featuring MEAS proprietary RVIT (Rotary Variable Inductance Transducer) technology. Operating from a single rail DC voltage supply, they provide either a $\pm 3\text{VDC}$ (RVIT 15-60) or 4-20mA (RVIT 15-120i) output, over a 120 degree angular sensing range.

The RVIT design utilizes a set of four printed circuit coils and a light-weight conductive spoiler to achieve superior performance with a low moment of inertia. During operation, the light weight spoiler rotates with the transducer shaft, differentially altering the inductance of the printed circuit planar coils. The resulting unbalance is precisely measured using a patented autoplex circuit. This signal is then converted to a linear DC output voltage, proportional to the angle of the rotor shaft. The digital circuit is extremely resistant to environmental disturbances such as EMI and RFI, and is compatible for use with most analog position feedback systems.

The RVIT 15-60 and RVIT 15-120i offer exceptional performance at a competitive price along with the interfacing flexibility of the $\pm 3\text{VDC}$ and 4-20 mA outputs. The RVIT 15-60 emulates a potentiometer in that the output voltage is ratiometric to the supply voltage, within the limits of the specification. Other standard features include a wide operating temperature range, infinite resolution, and an extremely long rotational life. For higher volume applications, specialized options include **special angular sensing ranges, and custom unipolar or bipolar output voltage scaling**.

Also see our other DC operated, angular position sensor models, **R60D** (bipolar DC operation, servo size 11 RVIT), **R120LC** (5VDC operation, low cost RVIT) and **R30D** (bipolar DC operated RVDT).

Measurement Specialties, Inc. (NASDAQ MEAS) offers many other types of sensors and signal conditioners. Data sheets can be downloaded from our web site at: <http://www.meas-spec.com/datasheets.aspx>

MEAS acquired Schaevitz Sensors and the **Schaevitz™** trademark in 2000.

FEATURES

- Extremely long rotational life
- Internal voltage regulation
- Shielded ABEC 3 precision bearings
- Rugged aluminum housing
- Flange mount with shaft seal (*optional*)

APPLICATIONS

- Ball valve position
- Throttle level feedback
- Rotary actuator feedback
- Dancer arm position
- Reeler / Dereeler

RVIT 15-60/15-120i – Rotary Variable Inductance Transducers

PERFORMANCE SPECIFICATIONS

| ELECTRICAL SPECIFICATIONS | | |
|----------------------------|---|---|
| Parameter | RVIT 15-60 | RVIT 15-120i |
| Angular range | ±60 degrees | 0 to 120 degrees |
| Input voltage | 4.0 to 5.5VDC | 10 to 28VDC (<i>not to exceed 30VDC</i>) |
| Input current | 14mA | 41mA |
| Sensitivity (*) | 10 mV/V/degree | 0.133 mA/degree |
| Output at range ends (*) | ±3.0VDC | 1 to 5VDC (<i>with 250 Ohm loop resistor</i>) |
| Output current | 2mA | 4 to 20mA |
| Output impedance | 1Ω maximum | 250Ω maximum |
| Temp coefficient of output | ±0.02% of FSO per °F [0.036% of FSO per °C], over operating temperature range | |
| Non-linearity | ±0.25% of FR | |
| Repeatability & hysteresis | 0.1% of FRO maximum | |
| Frequency response | 25Hz @ -3dB | |

| ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS | |
|---|--|
| Temperature range | 0°F to +170°F [-18°C to 77°C] Operating; -67°F to +257°F [-55°C to 125°C] Storage |
| Mechanical angular range | 360 degrees (no stops) |
| Bearings | ABEC 3 precision, matched and preloaded |
| Shaft diameter | 3/16 inch [4.76mm] |
| Housing material | Aluminum, black anodize |
| Mounting | Size 15 servo mount BU-ORD (standard) or Flange mount with shaft seal (with accessory) |
| Maximum torque | 0.12 inch.ounce-force [8.6 gram-force.cm] |
| Shaft load capability | 10 lb [4.5Kg] Axial and Radial |
| Electrical connection | 3 conductor cable, AWG 26, under PVC jacket, 12 inches [30cm] long |
| Weight | 2.5 oz [70grams] |

Notes:

All values are nominal unless otherwise noted

FR (Full Range) is the angular range, end to end; $2 \times A^\circ$ for $\pm A^\circ$ angular range, A° for a 0 to A° range


FSO (Full Scale Output): Largest absolute value of the outputs measured at the ends of the range

FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range


(*) Ratiometric to input voltage

RVIT 15-60/15-120i – Rotary Variable Inductance Transducers

WIRING INFORMATION



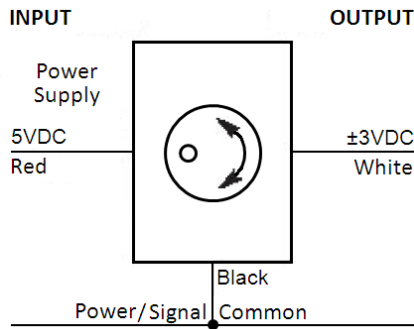


RVIT 15-60

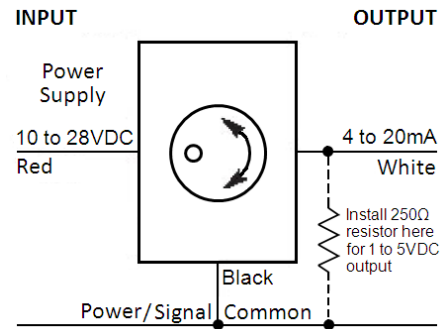

RVIT 15-120i

DIMENSIONS

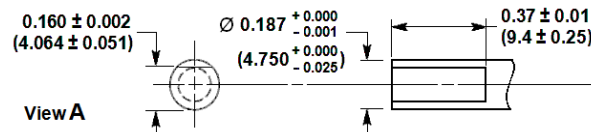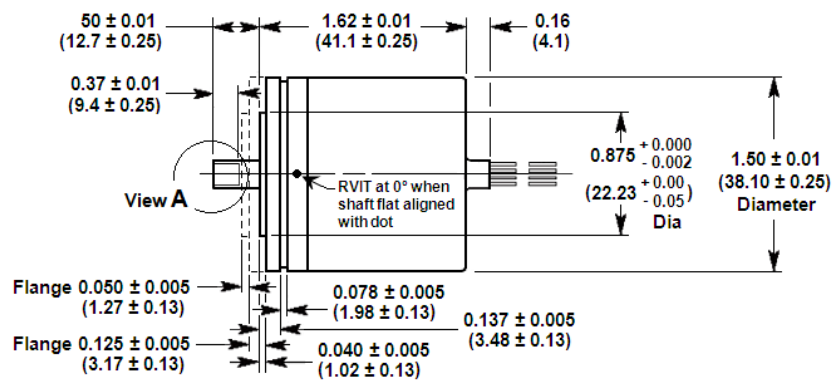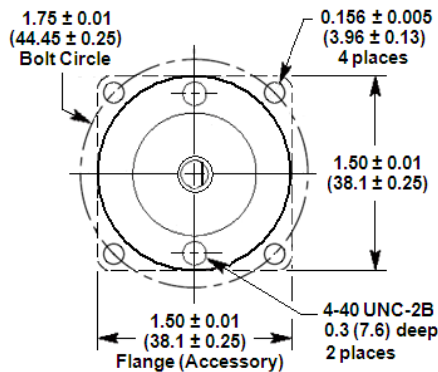

Dimensions are in inch (mm)

RVIT 15-60/15-120i – Rotary Variable Inductance Transducers

ORDERING INFORMATION

| Description, standard | Model | Part Number |
|--|--------------|--------------|
| RVIT ± 60 degree range, ± 3 VDC ratiometric output | RVIT 15-60 | 02180000-060 |
| RVIT 0 to 120 degree range, 4-20mA output | RVIT 15-120i | 02181600-120 |

| Description, custom versions | Model | Part Number |
|--|----------------------------|--------------|
| RVIT 0 to 80 degree range, 4-20mA output | RVIT 15-80i | 03181600-080 |
| RVIT 0 to 80 degree range, 20-4mA output | RVIT 15-80i Negative Slope | 03181700-080 |
| RVIT 0 to 90 degree range, 4-20mA output | RVIT 15-90i | 73180003-000 |

For the above custom versions or others, consult factory for minimum quantity, pricing, and availability.

| ACCESSORIES | | |
|--|-----------|--------------|
| R-FLEX multipurpose coupling kit | R-FLEX | 66530072-000 |
| Flange Mount for RVIT 15 | | 04180029-001 |
| DC power supply (15VDC) for RVIT 15-120i | PSD 40-15 | 02291339-000 |

Refer to our [“RVDT and RVIT Accessories”](#) data sheet for other accessories.

TECHNICAL CONTACT INFORMATION

| NORTH AMERICA | EUROPE | ASIA |
|---|--|---|
| Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 United States Phone: +1-800-745-8008 Fax: +1-757-766-4297 Email: sales@meas-spec.com Web: www.meas-spec.com | MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: info.de@meas-spec.com Web: www.meas-spec.com | Measurement Specialties China Ltd. No. 26, Langshan Road High-tech Park (North) Nanshan District, Shenzhen 518057 China Phone: +86-755-33305088 Fax: +86-755-33305099 Email: info.cn@meas-spec.com Web: www.meas-spec.com |

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.