

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REVISED PER ECO-11-023039	20FEB12	KH	MS

MATERIAL:
 HOUSING: THERMOPLASTIC, UL94V-2, BLACK.
 TERMINALS: BRASS, BRIGHT TIN PLATE.
 SCREWS: 6-32, STEEL, PLATED ZINC W/ CLEAR CHROMATE COATING.

ELECTRICAL:
 MAXIMUM CURRENT: 20A.
 OPERATING VOLTAGE: 600V.
 WIRE RANGE: 12-22 AWG.

ENVIRONMENTAL:
 OPERATING TEMP.: -60C TO +105°C.

1 ALL SCREWS BOTTOMED, TORQUE 2 TO 4 IN-LBS

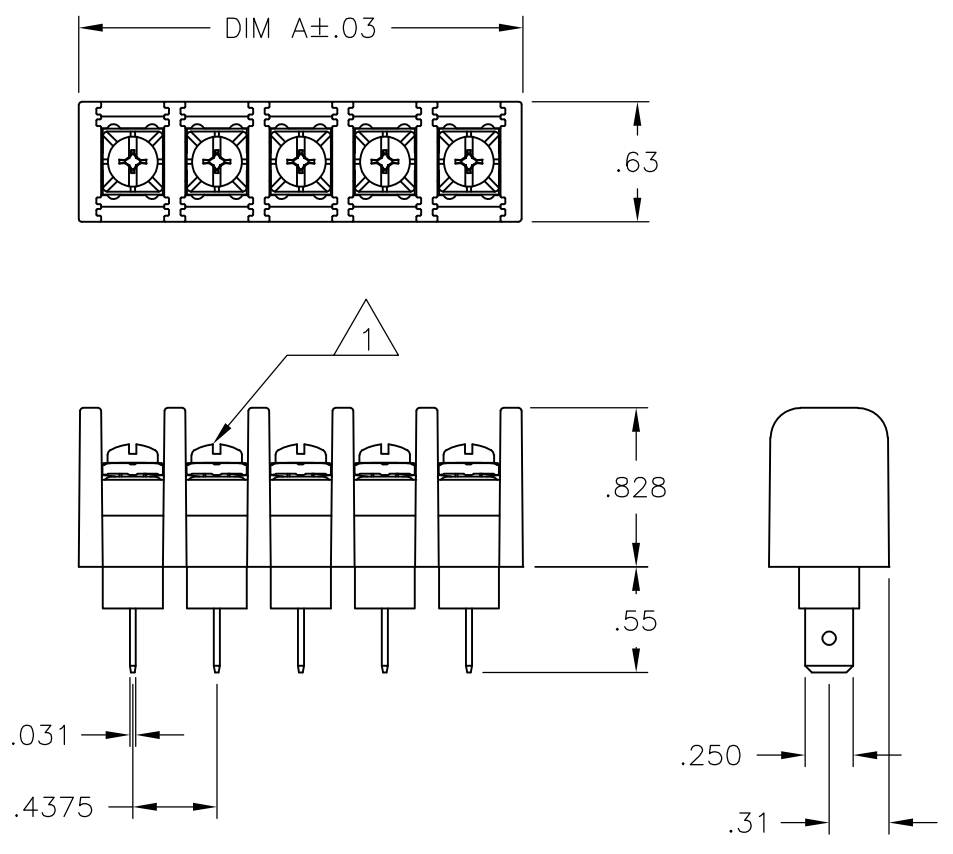

DIM A	NO. OF POS.	CATALOG NUMBER	PART NUMBER
11.937	27	SSB7TP270502	2-1546980-7
11.500	26	SSB7TP260502	2-1546980-6
11.062	25	SSB7TP250502	2-1546980-5
10.625	24	SSB7TP240502	2-1546980-4
10.187	23	SSB7TP230502	2-1546980-3
9.750	22	SSB7TP220502	2-1546980-2
9.312	21	SSB7TP210502	2-1546980-1
8.875	20	SSB7TP200502	2-1546980-0
8.437	19	SSB7TP190502	1-1546980-9
8.000	18	SSB7TP180502	1-1546980-8
7.562	17	SSB7TP170502	1-1546980-7
7.125	16	SSB7TP160502	1-1546980-6
6.687	15	SSB7TP150502	1-1546980-5
6.250	14	SSB7TP140502	1-1546980-4
5.812	13	SSB7TP130502	1-1546980-3
5.375	12	SSB7TP120502	5-1437417-7
4.937	11	SSB7TP110502	1-1546980-1
4.500	10	SSB7TP100502	1-1546980-0
4.062	9	SSB7TP090502	1546980-9
3.625	8	SSB7TP080502	1546980-8
3.187	7	SSB7TP070502	1546980-7
2.750	6	SSB7TP060502	4-796602-8
2.312	5	SSB7TP050502	1546980-5
1.875	4	SSB7TP040502	1546980-4
1.437	3	SSB7TP030502	1546980-3
1.000	2	SSB7TP020502	1546980-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHL GEL 3/18/05	STE TE Connectivity	
DIMENSIONS: INCHES		CHK S YODER 3/18/05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S YODER 3/18/05	NAME	
0 PLC ± -		PRODUCT SPEC	SSB7TPXX0502	
1 PLC ± -		APPLICATION SPEC	RESTRICTED TO	
2 PLC ± .02		WEIGHT -	SIZE A3	CAGE CODE 00779
3 PLC ± .010		CUSTOMER DRAWING	DRAWING NO C-4-796602-8	REV B
4 PLC ± -		SCALE NTS	SHEET 1 OF 1	
ANGLES ± 1°				
MATERIAL -				
FINISH -				