
CUSTOMER DRAWING

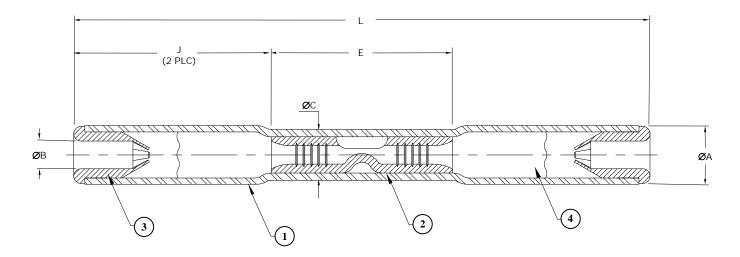

PART NUMBER	WIRE RANGE	L ± 1.0 (±0.040)	ØA ± 0.5 (±0.020)	ØB ± 0.25 (±0.010)	ØC ± 0.5 (±0.020)	E ± 0.25 (±0.010)	J ± 0.50 (±0.020)	END CAP COLOR CODE (BOTH ENDS)
D-436-36-COLD	26-24-22-20	36.8 (1.450)	4.2 (0.165)	2.0 (0.080)	3.7 (0.145)	12.1 (0.475)	12.7 (0.500)	RED
D-436-37-COLD	18-16	37.7 (1.484)	5.1 (0.200)	2.9 (0.115)	4.5 (0.175)	14.3 (0.565)	11.8 (0.464)	BLUE
D-436-38-COLD	14-12	37.7 (1.484)	5.9 (0.235)	3.8 (0.150)	5.2 (0.205)	14.3 (0.565)	11.8 (0.464)	YELLOW

MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent clear, radiation cross-linked modified polyvinylidene fluoride.
- 2. CRIMP:
 - Base Metal: Copper Alloy 101 or 102 per ASTM B-75, Annealed Plating: Tin-plate per ASTM-B545
- 3. END CAPS: Thermoplastic, Color Coded (See Table)
- 4. GEL: Clear silicone based Gel.

APPLICATION

- These parts are designed to provide immersion resistant in-line splices of 1 to 1 wires falling within size range listed above, and having insulations rated for 105°C.
- 2. Crimp splices using a Tyco Electronics AD-1381 Crimp Tool.
- 3. Install Cold Crimp Splices per Tyco Electronics RPIP-1102.
- 4. This document takes precedence over documents reference herein.
- 5. Temperature range: -65° C to $+150^{\circ}$ C.

AEROSPACE, DEFENSE & MARINE			300 Constitution Dr Menlo Park, CA 94025, U.S.A.	IMMERSION RESISTANT CRIMP SPLICE 150 DEG C, ROHS COMPLIANT COLD APPLIED SPLICE				
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			Raychem Devices	D-436-3X-COLD				
TOLERANCES:	ANGLES: N/A		reserves the right to					
	ROUGHNESS IN MICRON		ng at any time. Users he suitability of the application.	REV: B	DATE: March 10, 2011			
REVISED BY:	CAGE CODE:			SCALE:	SIZE:	SHEET:		
UNGUYEN	06090	EC	O-11-004984	NTS	Α	1 of 1		