

**SiBar™**  
**Thyristor Surge Protectors**



*Raychem Circuit Protection Products*

**PRODUCT: TVB058SA-L**

DOCUMENT: SCD 25052  
PCN: 539912  
REV LETTER: H  
REV DATE: APRIL 28, 2007  
PAGE NO.: 1 OF 2

**Specification Status: Released**

**PHYSICAL DESCRIPTION**

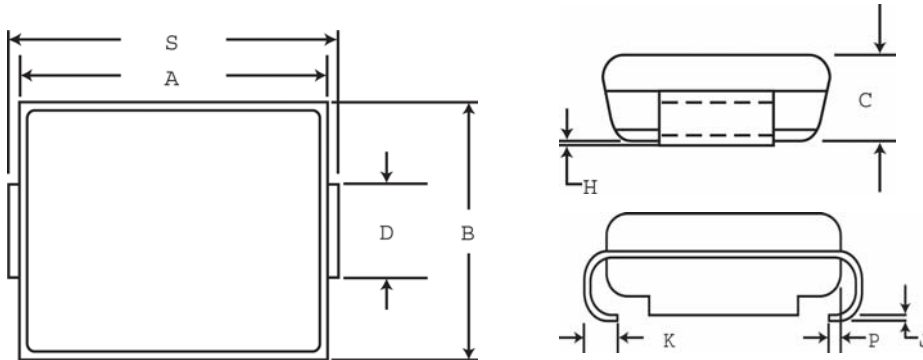

	A		B		C		D**		H		J		K	
mm:	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
in*:	(0.160)	(0.180)	(0.130)	(0.155)	(0.075)	(0.096)	(0.077)	(0.086)	(0.002)	(0.008)	(0.006)	(0.012)	(0.030)	(0.060)

	P	S	
mm:	REF	MIN	MAX
in*:	(0.020)	(0.205)	(0.220)

\*Rounded off approximation  
\*\* D DIMENSION SHALL BE MEASURED WITHIN DIMENSION P

**Other Physical Characteristics**

- Form Factor: SMB (Surface Mount, JEDEC DO-214AA Package)
- Lead Material: Matte Tin finish
- Encapsulation Material: Epoxy, meets UL94 V-0 requirements
- Solderability: per MIL-STD-750, Method 2026
- Solder Heat Withstand: per MIL-STD-750, Method 2031
- Solvent Resistance: per MIL-STD-750, Method 1022
- Mechanical Shock: per MIL-STD-750, Method 2016
- Vibration: per MIL-STD-750, Method 2056

Tape and Reel packaging per EIA 481-1

- Agency Recognition: UL
- Precedence: This specification takes precedence over documents referenced herein.
- CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

RoHS Compliant ELV Compliant

Directive 2002/95/EC  
Compliant

Directive 2000/53/EC  
Compliant

OBSOLETE  
NOT the LATEST  
REVISION

# SiBar™ Thyristor Surge Protectors

Raychem Circuit Protection Products

Parameter	Symbol	Value	Units
Repetitive Off-State Voltage, Maximum at $I_D = 5 \mu A$	VDM	58	V
Non-Repetitive Peak Impulse Current	IPP <sub>1</sub>	50	A
Telcordia GR-1089 CORE 10x1000 $\mu s$			
Impulse Current	IPP <sub>2</sub>	70	A
TIA-968 lightning Type A Metallic 10/560 $\mu s$			
Double exponential Waveform	IPP <sub>3</sub>	90	A
TIA-968 lightning Type A Longit. 10/160 $\mu s$			
Telcordia GR-1089 Intrabuilding 2/10 $\mu s$	IPP <sub>4</sub>	150	A
(Notes 1 and 2)			
IEC61000-4-5 (Voc 1.2/50us) 8/20 $\mu s$	IPP <sub>5</sub>	150	A
ITU-T K.20/K.21 (Voc 10/700us) 5/310us	IPP <sub>6</sub>	80	A
TIA-968 lightning Type B (Voc 9/720us) 5/320 $\mu s$	IPP <sub>7</sub>	80	A
Critical Rate of Rise of On-State Current			
Power Pulse Amplifier, C=30 $\mu F$ , V=600V	di/dt	500	A/ $\mu s$
Maximum 2x10 $\mu s$ waveform, V <sub>OC</sub> =750V, I <sub>SC</sub> =150A peak	di/dt	100	A/ $\mu s$

## DEVICE THERMAL RATINGS

Parameter	Symbol	Value	Units
Storage Temperature Range	TSTG	-55 to 150	°C
Operating Temperature Range Blocking or conducting state	TA	-40 to 125	°C
Overload Junction Temperature Maximum; Conducting state only	TJ	+150	°C
Maximum Lead Temperature for Soldering Purpose; for 10 seconds	TL	+260	°C

## ELECTRICAL CHARACTERISTICS Both polarities (T<sub>J</sub> @ 25°C unless otherwise noted)

Characteristics	Symbol	Min	Typ	Max	Units
Breakover Voltage (+25°C) (dv/dt = 0.4kV/ms, I <sub>SC</sub> =900mA, V <sub>DC</sub> = 500V (both polarities))	VBO	----	64	78	V
Breakover Voltage Temperature Coefficient	dVBO/dTJ	----	0.1	-----	%/°C
Off-State Current (VD1= 50V)	ID1	----	-----	2.0	$\mu A$
(VD2=VDM)	ID2=IDM	----	-----	5.0	$\mu A$
On-State Voltage (IT=1A) PW $\leq$ 300 $\mu s$ , Duty Cycle $\leq$ 2% (Note 2)	VT	----	-----	4.0	V
Breakover Current	IBO	----	-----	800	mA
Holding Current (Note 2)	IH	150	----	-----	mA
Peak Onstage Surge Current (Measured @ 60Hz, 1 cycle, 600V)	ITSM	22	----	-----	A
Critical Rate of Rise of Off-State Voltage (Linear waveform, VD = 0.8 X Rated VBO, TJ= +25°C)	dv/dt	2000	----	-----	V/ $\mu s$
Capacitance (f=1.0 Mhz, 50Vdc bias, 1Vrms)	C1	----	43	-----	pF
(f=1.0 Mhz, 2Vdc bias, 1Vrms)	C2	----	80	-----	pF

Note 1. Allow cooling before testing second polarity

Note 2. Measured under pulse conditions to reduce heating

## VOLTAGE-CURRENT CHARACTERISTIC

