
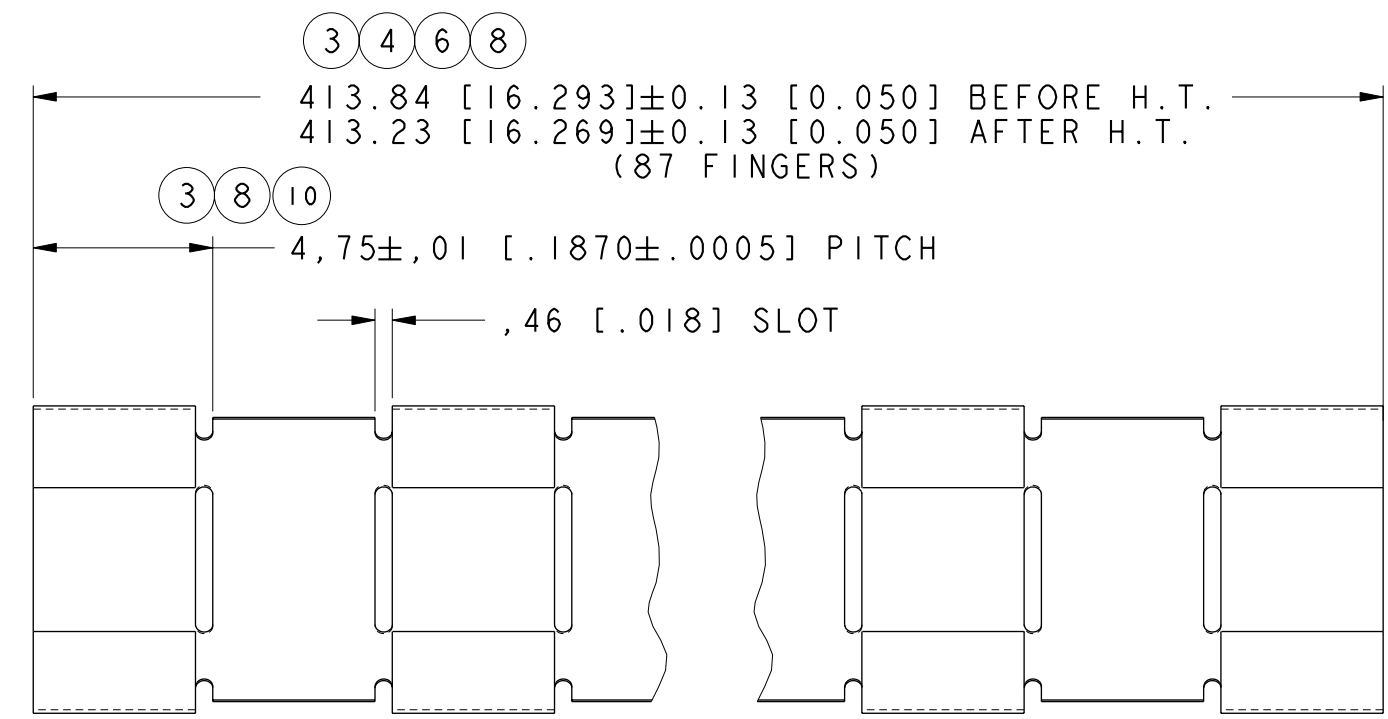
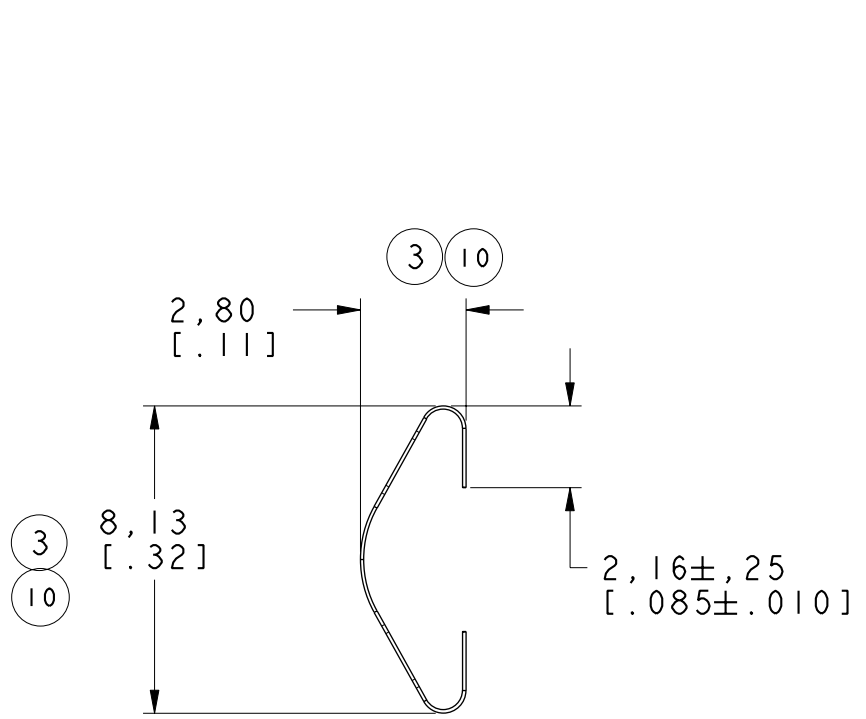
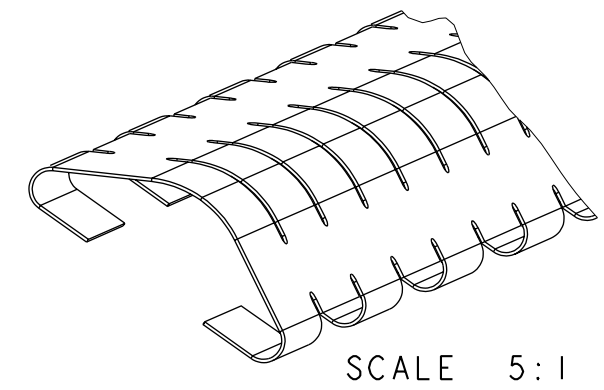


| | | |
|---|--------------|----|
| DWG. NO. | 0077-0056-02 | |
| REVISIONS | | |
| ECO-E1787 ADDED TOLERANCE 2 PL DECIMAL WAS 3PL RKM 07/21/00 EWS 7-25-00 | | 03 |
| ECO-E1982 ADDED BEFORE AND AFTER H.T. DIMENSIONS. RKM 11/13/00 EWS 11/14/00 | | 04 |
| ECO-E2637 ±.015 WAS ±.005 RKM 12/04/01 EWS 12/04/01 | | 05 |
| ECO-E2711 16.275 WAS 16.293 16.250 WAS 16.269. RKM 01/28/02 EWS 01/28/02 | | 06 |
| ECO-E4029 REMOVED MATERIAL WIDTH SDH 09/11-03 EWS 09/26/03 | | 07 |
| ECO-E5062 ADDED H.T. SPECS. FROM REV 07 RKM 06/29/05 EWS 06/29/05 | | 08 |
| ECO-E5541 ADDED ±.010 TOL TO .085 DIM SDH 08/23/06 EWS 08/24/06 | | 09 |
| ECO-E5864 .32 WAS .320 .11 WAS .110 .0005 PITCH TOL. WAS .005.RKM 03/23/07. EWS 03/26/07 | | 10 |

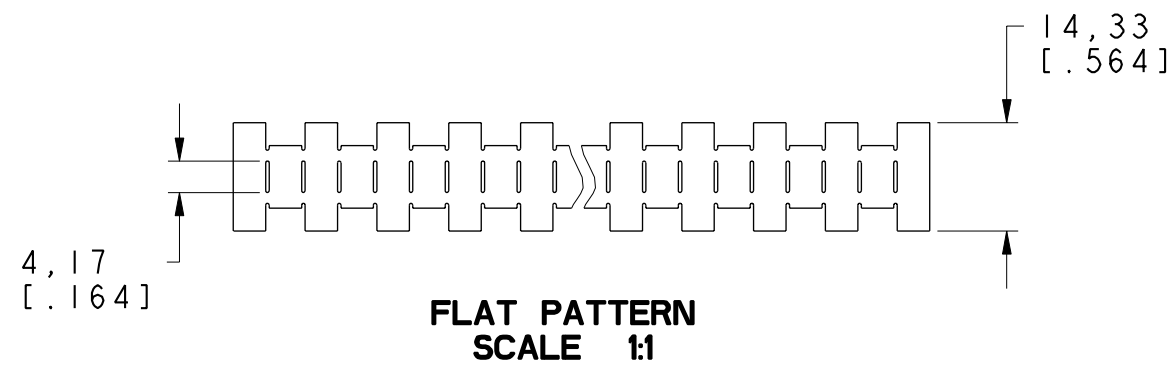

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO LAIRD TECHNOLOGIES.
IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN LAIRD TECHNOLOGIES
PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM LAIRD TECHNOLOGIES.

DWG. NO. 0077-0056-02

| | | | | |
|---|--|--|-----------------------|-------------------|
| MATERIAL: 0.09 [0.0035]±.0005 [0.0002] THICK BeCu ALLOY 25 1/4 HARD | TOLERANCES NOT SHOWN DECIMAL 2 PL'S ± 0.50 [0.020] DECIMAL 3 PL'S ± 0.38 [0.015] | <p>DELAWARE WATER GAP PENNSYLVANIA</p> | DRAWN BY: AD | DATE: 05/18/99 |
| HEAT TREAT: TO DPH 373 MIN USING A 500 GRAM LOAD | ANGULAR ± --- | | CHECKED: ES | DATE: 12/04/01 |
| THICKNESS AFTER: CLEANING AND BEFORE PLATING 0.08 [0.00315] MIN. | THIRD ANGLE PROJECTION | APPROVED: EWS | | DATE: 05/26/99 |
| FINISH: BRIGHT FINISH | UNITS: MM [INCH] SCALE: 5:1 | LAIRD STANDARD | | |
| CAD MAINTAINED DRAWING. MANUAL CHANGES UNAUTHORIZED. | | REF. DWG NO. 0077-0010-01 | DWG. NO. 0077-0056-02 | REV 10 |
| | | SHEET 1 OF 1 | | |