


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|--------------|-----------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| H | - | | | | |
| | A | EHO2-0004-02 | 29 JAN 02 | RC | RM |
| | O | EH-0558-97 | 30 MAY 97 | AM | DS |
| | - | - | - | - | - |

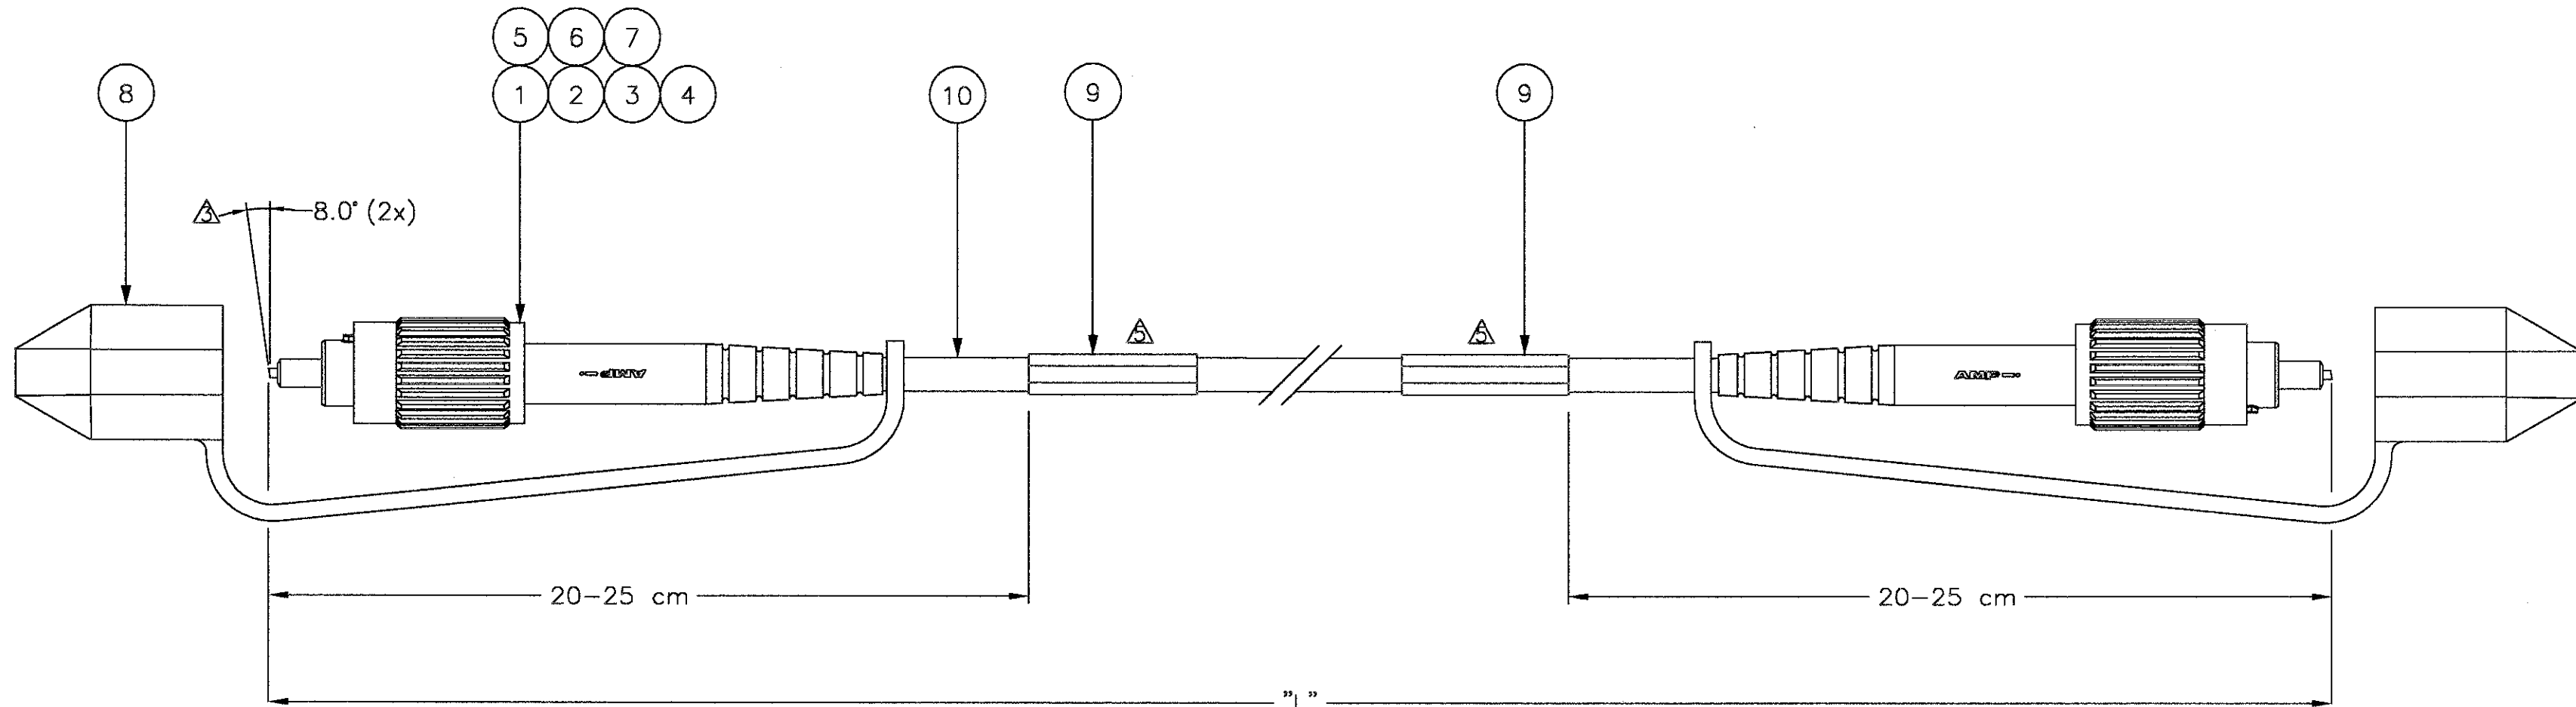

| STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850 | |
|--|-------------|
| PART NUMBER | "L" (METER) |
| X-0233888-Y | XY,0 |

NOTES:

- INSERTION LOSS $\leq 0,5$ dB, MEASURED AGAINST REF. CONNECTOR.
- RETURN LOSS ≥ 65 dB, MATED
- APC ANGLE = 8°
- CABLE:
 - 9/125 μ m
 - DIAMETER: 3,0 mm
 - COLOUR: YELLOW
 - TIGHT BUFFER
 - OUTER SHEATH MATERIAL: PVC
- INFO ON CABLE LABEL:
 - TYCO PART NUMBER
 - P.O. NUMBER AND PROD. DATE (FORMAT YYWW)

EXAMPLE: TYCO 0-0233888-2
0-1234-5 0204

| L | Part Number | Description | Item |
|----|-------------|-----------------------------|------|
| 10 | - | CABLE ϕ 3,0 mm | 10 |
| 9 | - | CABLE LABEL | 9 |
| 8 | - | CAP, PROTECTIVE, BLACK | 8 |
| 7 | - | BOOT, GREEN | 7 |
| 6 | - | CRIMP EYELET OPTIMATE 3,0mm | 6 |
| 5 | - | INTERNAL BODY, 3,0 mm | 5 |
| 4 | - | SPRING COMPRESSION 3,0 mm | 4 |
| 3 | - | FERR. SUBASSY | 3 |
| 2 | - | PLUG BODY, PRECISION KEYING | 2 |
| 1 | - | COUPLING NUT | 1 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | |
|----------------------------|--|
| DWN: R.COOLEN 29 JAN 02 | Tyco Electronics Corporation 's-Hertogenbosch Nederland |
| CHK: R.MAARTENS 29 JAN 02 | |
| APVD: R.MAARTENS 29 JAN 02 | |
| PRODUCT SPEC | NAME: FOSM LEAD 3,0 FC/APC - FC/APC |
| APPLICATION SPEC | SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=233888 |
| WEIGHT | RESTRICTED TO: - |
| CUSTOMER DRAWING | SCALE: --- SHEET 1 OF 1 REV A |