

Grid Dish Parabolic Antenna

GD25



GD25: 2500 TO 2700 MHz OPERATION

The 2.5 GHz parabolic grid directional antennas offered by Laird Technologies utilize a patented parabolic grid design with a patented high-performance dipole feed. The antennas are constructed of welded steel wires which are galvanized and then powder coat painted with light gray epoxy paint. The wire grid semi-parabolic design offers unsurpassed low wind loading while maintaining good RF performance. The compact low visual impact attractive styling blends well in almost any application. Mounting is simplified with the Laird Technologies bracket system made of galvanized steel with stainless steel hardware. The antenna comes with a 30 inch LMR240 pigtail cable with choice of N male or N female connector.


FEATURES

- Designed for WiMAX and MMDS systems
- 15 dBi, 19 dBi and 24 dBi models available
- Rugged and weatherproof
- Ultra low wind loading and low visual impact
- Vertical or horizontal polarization
- Various connector choices


MARKETS

- WiMAX applications
- Client antennas
- MMDS applications
- Point-to-point backhaul


ANTENNA PATTERNS

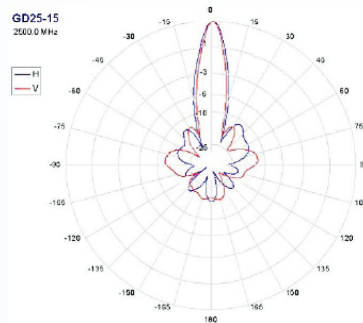

GD25-15

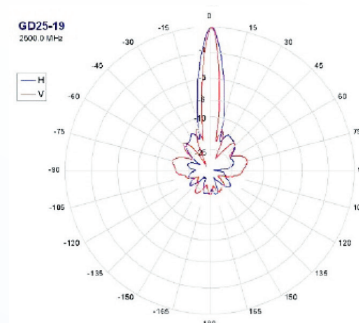

GD25-19

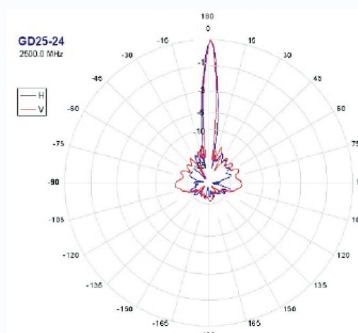

GD25-24

global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

Grid Dish Parabolic Antenna

GD25

SPECIFICATIONS

PARAMETER	MODEL	MIN	TYP	MAX	UNITS
Frequency Range		2500		2700	MHz
Gain	GD25-15 GD25-19 GD25-24		15 19 24		dBi
3dB Beamwidth	GD25-15 GD25-19 GD25-24		17V, 21H 11V, 17H 8V, 10H		Deg
Front-to-Back	GD25-15 GD25-19 GD25-24	17 22 25			dB
VSWR			1.5:1		
Impedance			50		ohm
Input Power				100	W
Operating Temperature		-40		+70	Deg C
Pole Size		1 (25)		2 (50)	in (mm)
Weight	GD25-15 GD25-19 GD25-24		4 (1.8) 6 (2.7) 11 (5)		lbs (kg)
Dimension (W x L)	GD25-15 GD25-19 GD25-24		12 x 16 (305 x 406) 16.5 x 24 (419 x 610) 28.5 x 36 (724 x 914)		in (mm)
Bracket Tilt			45		Deg

WIND LOADING (LBS.)

MODEL	SQ. IN	100 MPH	125 MPH	100 MPH WITH ½ in RADIAL ICE
GD25-15	40	10	15.6	48
GD25-19	79	20	31	99
GD25-24	163	41	64	257

SYSTEM ORDERING INFORMATION

GD25 - _ _ p - _ _ _ _
 15 NM (N male)
 19 NF (N female)
 24

NOTES

- All shipments F.O.B. Schaumburg, IL 60173

ANT-DS-GD25 0511

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2011 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.