



GOLD ANODIZED YAGI ANTENNA INSURES LONG-TERM PERFORMANCE

Laird Technologies' premium series Directional Yagi antennas are fully gold anodized for corrosion resistance. Our engineering staff has also optimized the product family for forward gain by computer analysis and then field-tested each for conformance.

FEATURES

- Every Yagi is tuned on a network analyzer for best power match and lowest VSWR.
- All Yagi antennas ship complete with a high quality cast aluminum mounting kit that includes stainless steel hardware and allows vertical or horizontal orientation during installation. (VHF models require light assembly)
- Available in gold or black (B) anodized finish

APPLICATIONS

- Point-to-point directional and multiple-point to omnidirectional outdoor antennas applications used by private organizations and government agencies around the globe.
- Typical applications include transportation such as railroad switching, remote locations reporting examples that include oil fields and weather conditions and meter data transmissions for utilities.

global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com



Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com


www.lairdtech.com

MECHANICAL SPECIFICATIONS		ELECTRICAL SPECIFICATIONS	
Material	Aluminum	Frequency Range	150 – 174 MHz
Length	41-1/2"	Frequency Bandwidth	3 MHz typical
Height	39-1/4"	VSWR	< 2:1
Boom Diameter	7/8"	Return Loss	-10dB max
Weight	4 lbs	Nominal Gain	7.1 dBd
Rated Wind Velocity	150 mph (241 kph)	Front to Back Ratio	17 dB
Rated Wind Velocity (with 0.5" radial ice)	80 mph (130 kph)	Maximum Power	300 W
Equivalent Flat Area	0.504 sq. ft.	Nominal Impedance	50 Ω
Cable	None	Polarization	Vertical or Horizontal
Termination	N-Female connector	Pattern	Directional
Color	Gold or Black Anodized	Horizontal Beamwidth (For Horizontal Polarization)	78°
Lightning Protection	Lightning Arrestor LABH350NN (Sold Separately)	Vertical Beamwidth (For Vertical Polarization)	74°
Mounting Included	Heavy duty cast aluminum bracket accomodates up to 7/8" mast	Tuning	See cutting chart
		Transmitting/Receiving	Both

Heavy-Duty Mounting Kit Included

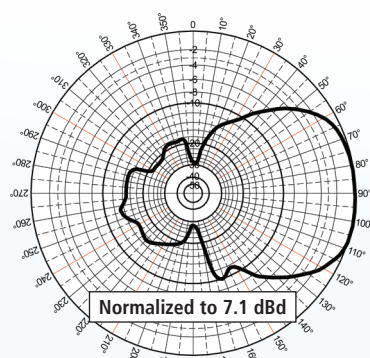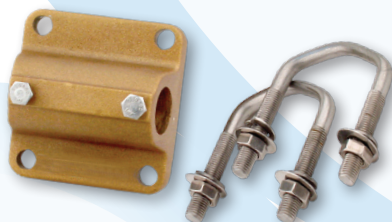

**Vertical-to-Vertical Polarization
Azimuthal Pattern (Y, Z, or E-plane)**

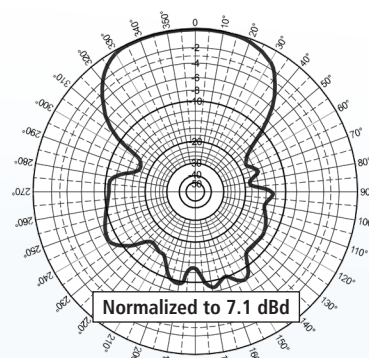

**Horizontal-to-Horizontal Polarization
Azimuthal Pattern (Y, Z, or H-plane)**

ANT-DS-Y(B)1503 0509

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2009 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.