



CUSTOMER DATA SHEET

TOLERANCE UNLESS OTHERWISE SPECIFIED
 DECIMALS ± .005 FRACTIONAL ± 1/64

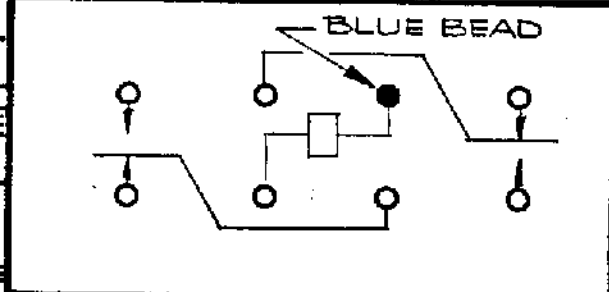

CONTACT RATING:
 2A @ 28VDC. RES. 100,000 OPERATIONS
 10mA @ 30mV. RES. 100,000 OPERATIONS

DR. 3-22-79 CK. JAL



HFW 1106 K12

COIL: @ 25°C

WINDING # 1	WINDING # 2
700 OHMS ± 10%	OHMS
13.5 VDC MUST OPERATE	MUST OPERATE
1.5 VDC MUST RELEASE	MUST OPERATE

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: NOMINAL VOLTAGE 26.5VDC

CUST. QPL
 CUST. NO. M39016/6-128L

TYPE "HFW" RELAY