



ON Semiconductor®

<http://onsemi.com>

# LA0152CS

Monolithic Linear IC

## Photo IC for Ultra-small illumination Sensor

### Overview

The LA0152CS is a photo IC for micro-sized illumination sensor which has the characteristics of spectral response similar to that of human eyes. It is suitable for applications like mobile phone, laptop computer, PDA, DSC and Camcorder.

### Characteristic

- Smallest OD-CSP package in the world (1.01mm x 1.01mm x thickness: 0.6mm)
- Low variation and Optical Output Current in low temperature fluctuation.
- Integrated Sleep function.
- Low current consumption.

### Specifications

**Absolute Maximum Ratings** at  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC}$		6	V
Operating temperature	$T_{opr}$		-30 to +85	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-40 to +100	$^\circ\text{C}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

**Recommended operating conditions and operating voltage range** at  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
SW pin low voltage	$V_L$	Sleep mode	0		0.4	V
SW pin high voltage	$V_H$	Active mode	1.4		$V_{CC}$	V

# LA0152CS


## Electrical and optical characteristics at Ta = 25°C, VCC = 3.3V

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Recommended Supply Voltage	VCC		2.2	3.3	5.5	V
Current dissipation *1, *3	ICC	Ev = 1000 lux, RL = 5kΩ	90	150	210	μA
Sleep Current(1) *3	ISL1	Ev = 0 lux			0.1	μA
Sleep Current(1) *3	ISL2	Ev = 1000 lux			0.3	μA
Output current (2) *1, *3	IO1	Ev = 100 lx	6	8	10	μA
Output current (2) *1, *3	IO2	Ev = 1000 lx	60	80	100	μA
Dark current *3	Ileak	Ev = 0 lx			0.1	μA
Temperature coefficient *2	Itc	Ev = 100 lx		0.34		%/°C
Rise time *4	Tr	Ev = 1000 lx, RL = 5kΩ		15	40	μs
Fall time *4	Tf	Ev = 1000 lx, RL = 5kΩ		150	500	μs
Peak sensitivity wave length *2	λp			550		nm
Saturation output voltage *1, *3	VO	Ev = 1000 lx, RL = 150kΩ	3.0	3.2		V


\*1. Measured with the standard light source A. White LED is used instead in the mass production line.

\*2. Design guaranteed item

\*3. Test circuit for measuring current dissipation and output current

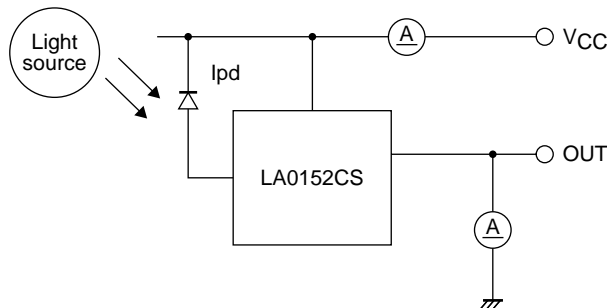


\*4. Measuring method of rise time (Tr) and fall time (Tf)

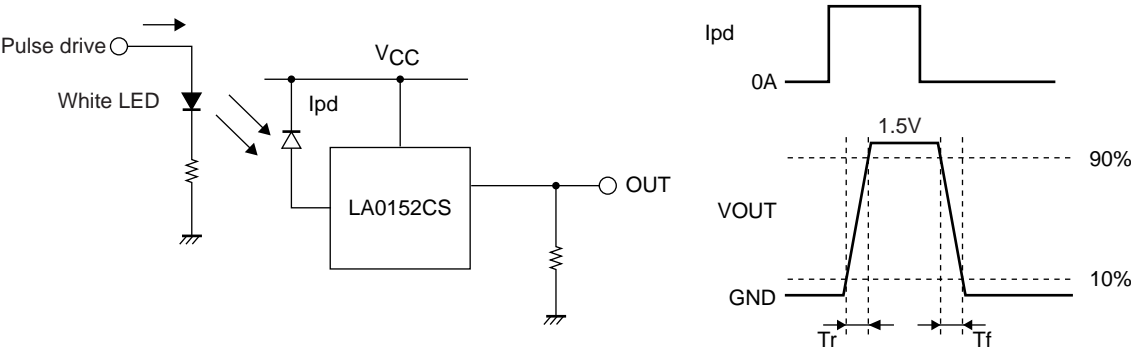


Package Dimensions

unit : mm (typ)  
3350A

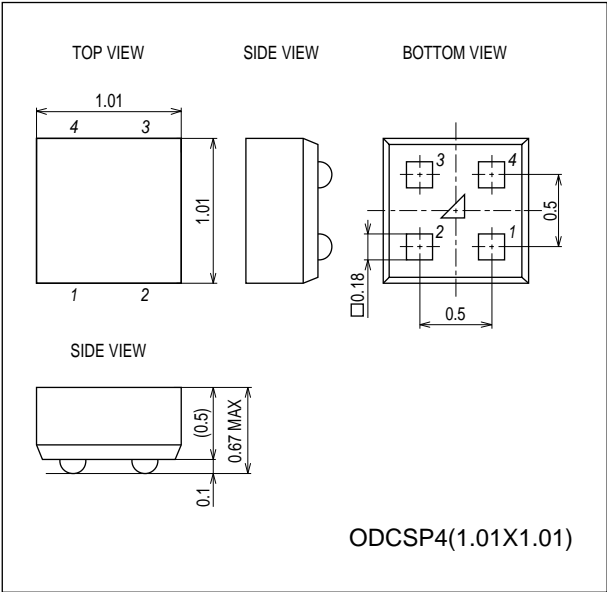


Pad layout

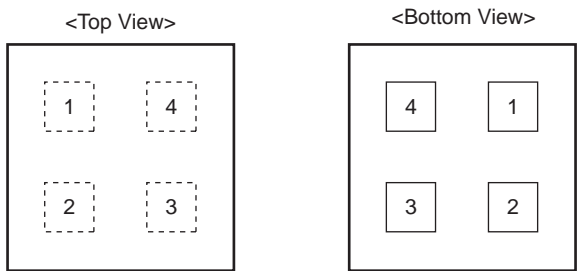

Pin No.	Pin Name	Function
1	VCC	Power supply
2	EN	Enable
3	GND	Ground
4	OUT	Output

Ball pitch : 0.5mm, Ball size : 0.18mm<sup>□</sup>

Pad layout (Photos)

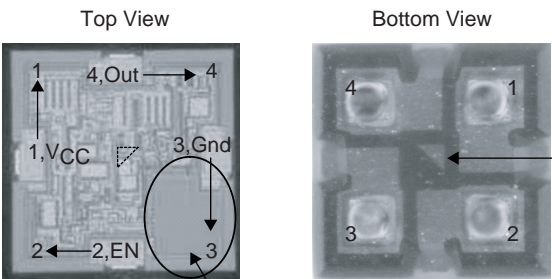


Pin 1 mark  
It is located at the center of the bottom of the package.


Photo diode. Only this part looks dark on the product.

\* The photo diode is located in pin 3. Be careful not to mistake the pin 1 mark for the photo diode.


## Internal block diagram








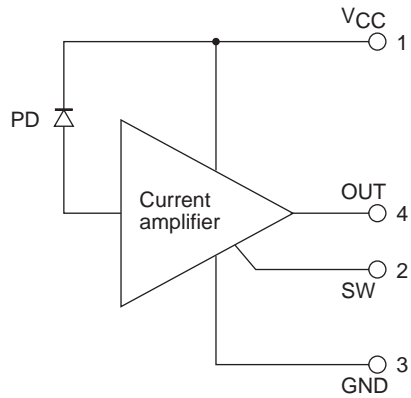





## Chip pattern and photo-receiving pattern diagrams

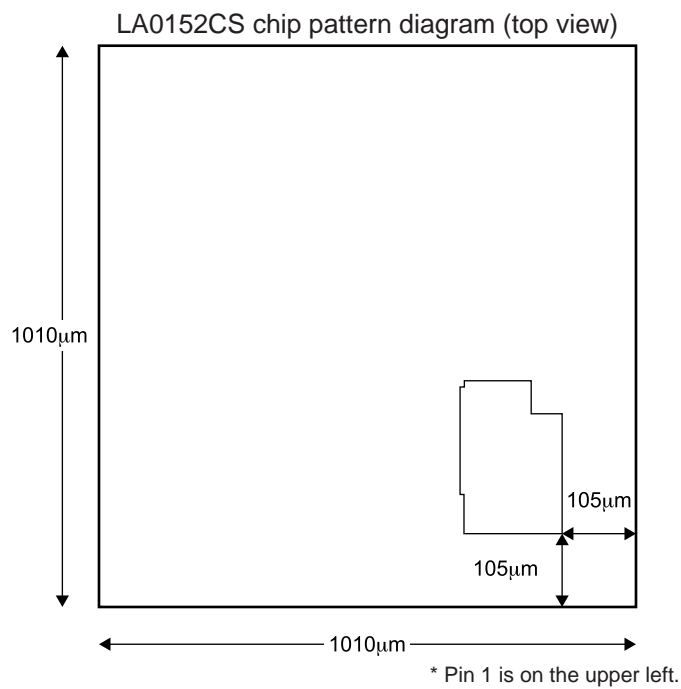

LA0152CS photo-receiving pattern enlarged diagram (effective area)

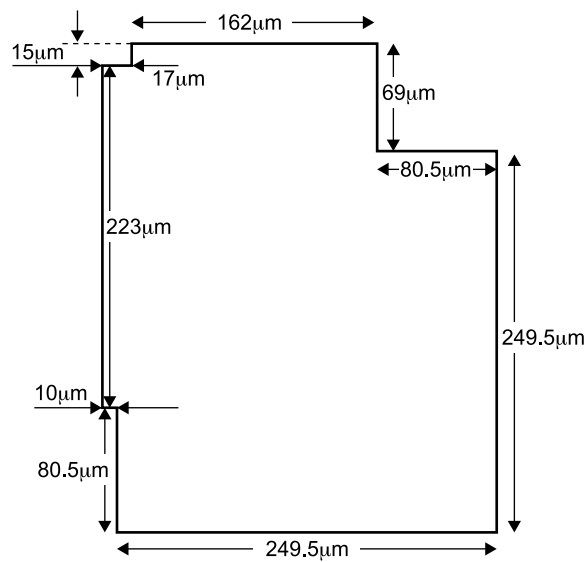

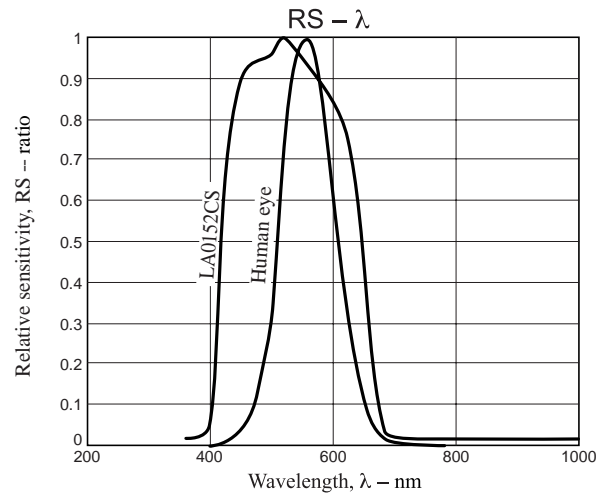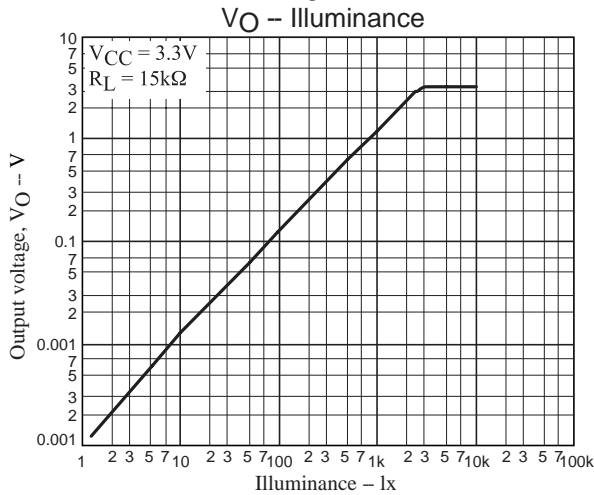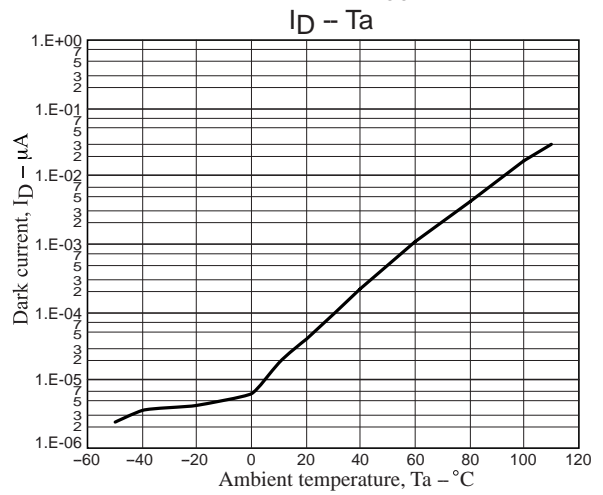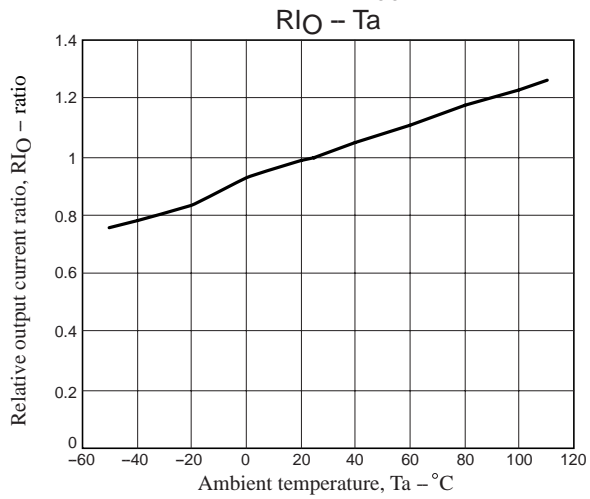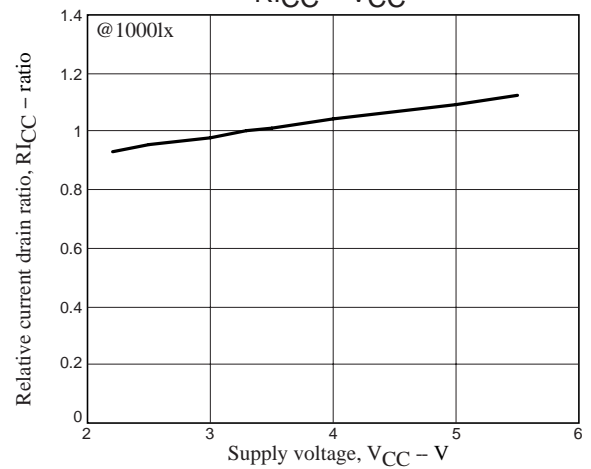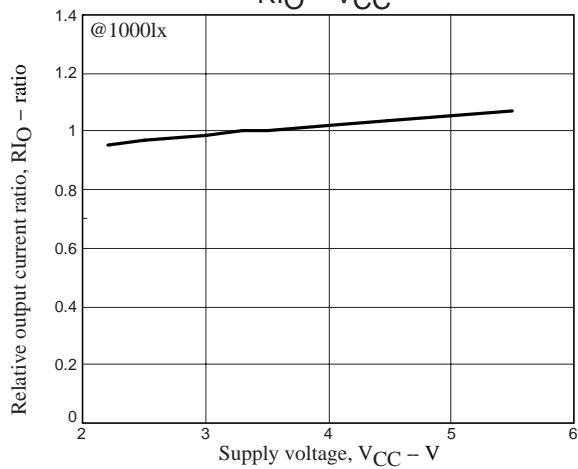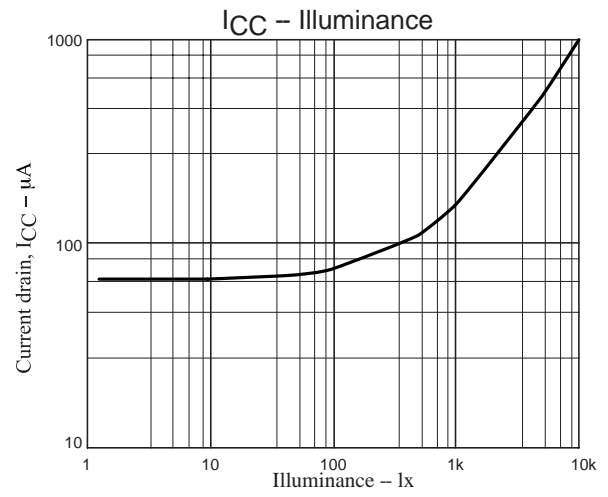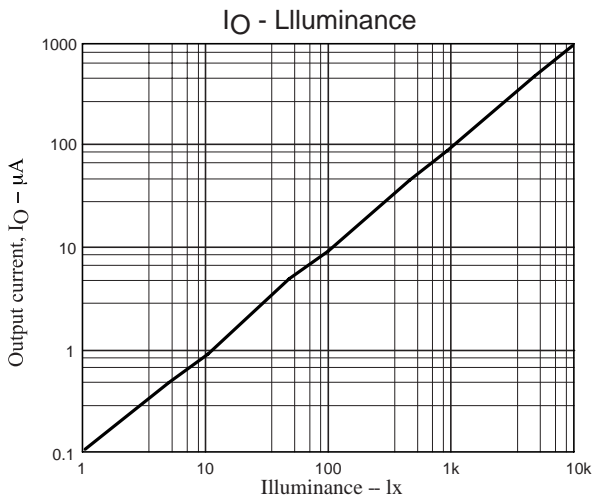

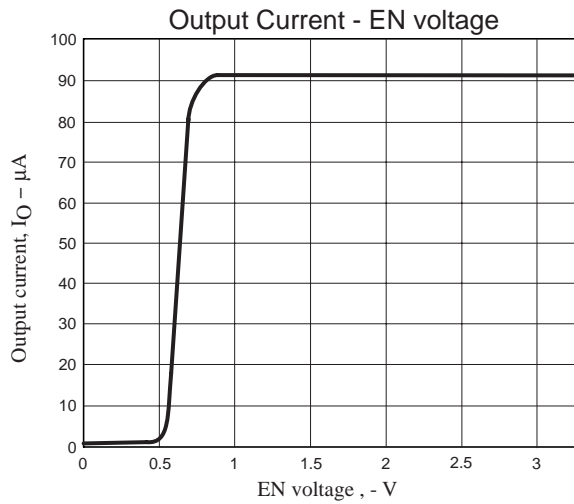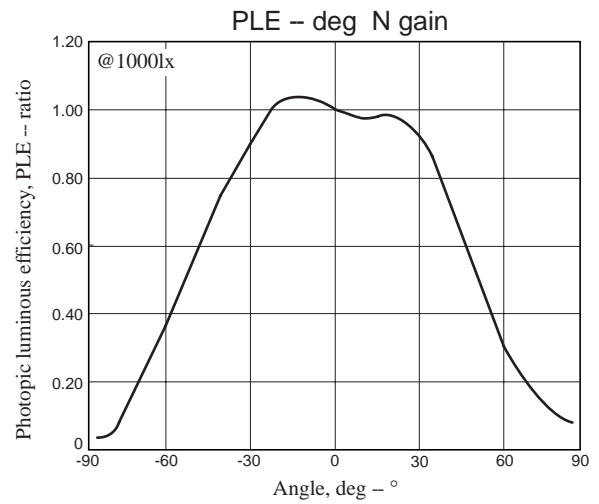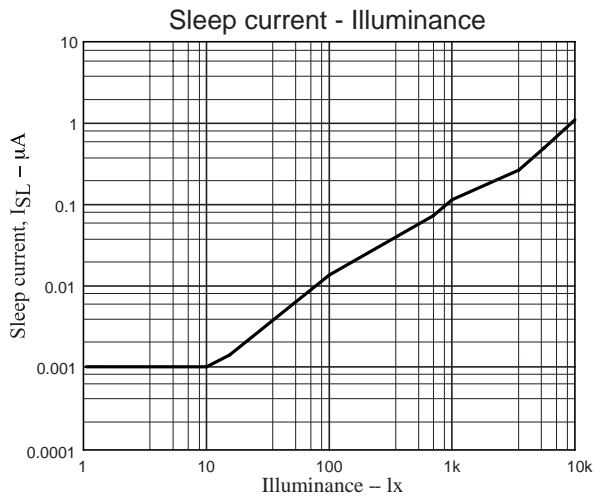

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.