





9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 372-1266
 Website: www.cui.com

Specifications

1	Part No.	GF3002			
2	Nominal Size	306 mm.	12"	inch	
3	Impedance	$8 \Omega \pm 15\%$	at	200 Hz.	1 V.
4	Resonance	35 Hz.±	5 Hz.	FO Hz.	1 V.
5	S.P. Level	$96 \text{ dB/w} \pm 2 \text{ dB}$	1 w. 50 cm. average at		
6	Response	fo Hz.~	3K Hz.	MAX 10dB	150, 200, 300, 400 Hz.
7	Crossover Freq.	Hz.	Hz.	dB/OCT	Net work
8	Input Power	Nominal Input	100 w.	Handling Capacity	150 w.
9	Operation	Must be normal at program source			100 w.
10	Buzz, Rattle, etc.	Must be normal at sine wave			6.3 v.
11	Flux Density	Gauss $\pm 10\%$			
12	Total Flux	Max well min			
13	Magnet	Size	100 x 60 x 20 mm	gr	oz
14	Total Weight				gr oz
15	Load Test	After test meet item 9 and 10		White noise	100 W. 48 Hours
16	Distortion	$\% \text{ MAX}$			Hz W.
17	Heat Test	After test meet item 9 and 10		$60 \pm 2 \pm^\circ\text{C}$	20-50 %R.H. 48 Hours
18	Humidity Test	After test meet item 9 and 10		$40 \pm 2 \pm^\circ\text{C}$	90-95 %R.H. 48 Hours

PART NO.	GF3002	UNITS:	mm
DRAWN BY:	PAGE NO:	1 of 2	

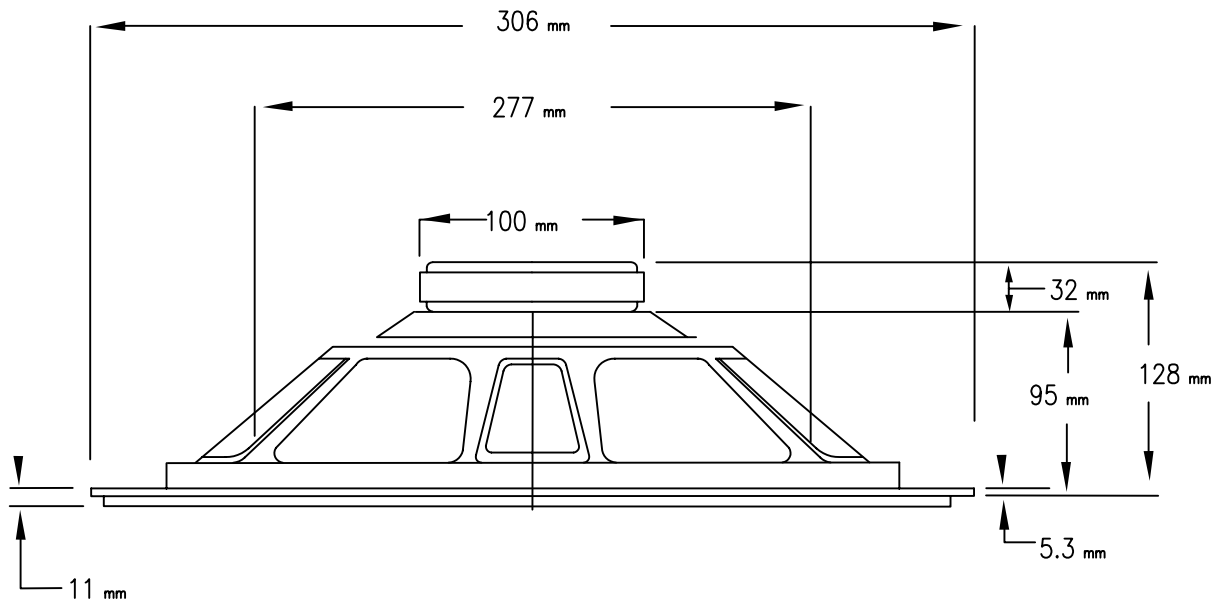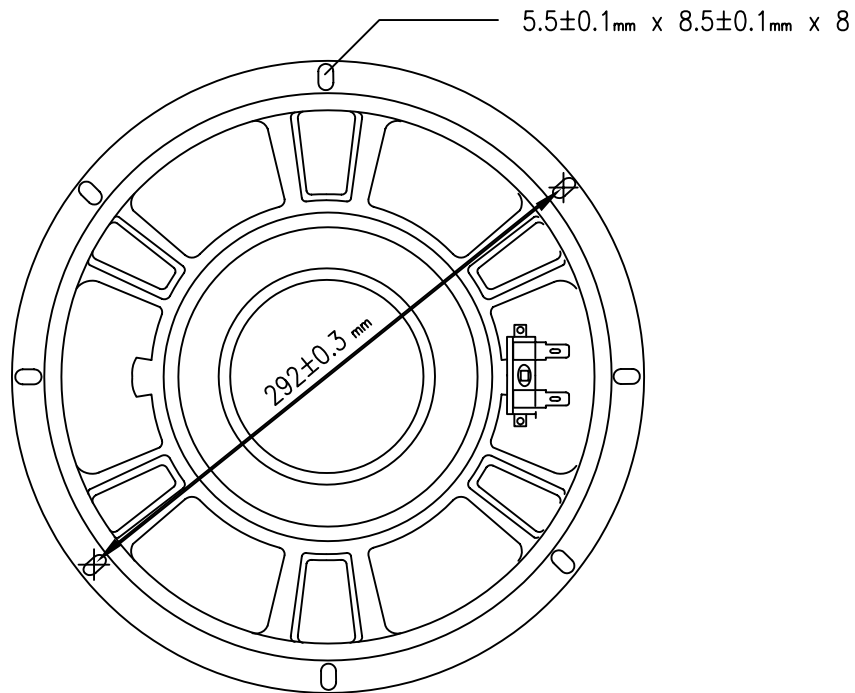

9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 372-1266
 Website: www.cui.com

TITLE:

PART NO.

GF3002

UNITS:

mm

DRAWN BY:

Page No.

2 of 2