
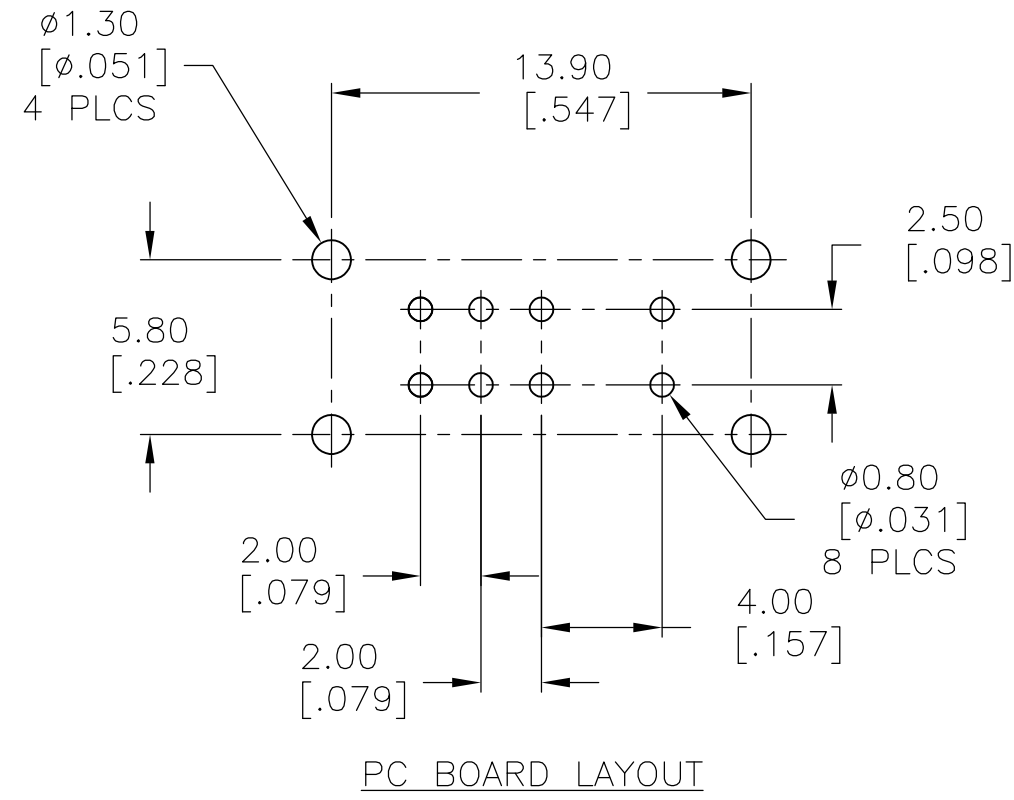


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
A		REV PER EC 0G3C-0657-03	17AUG06	MB	MS		

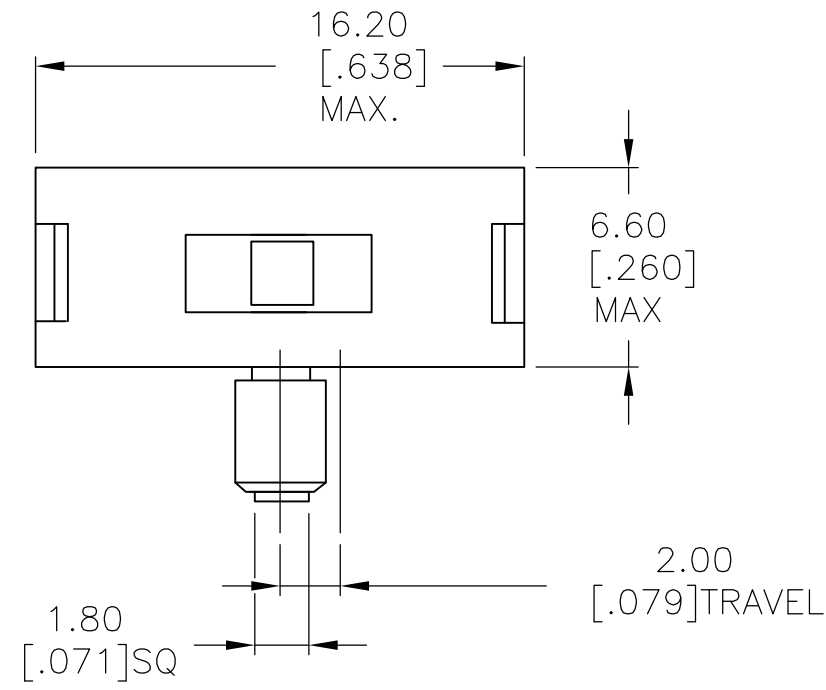

SPECIFICATIONS:

MATERIALS:

BASE, NYLON 66 UL94V-0, 25% GF-BLACK
 COVER, POLYACETAL UL94-HB, 25% GF-BLACK
 ACTUATOR, POLYACETAL, UL94-HB, BLACK
 MOVING CONTACT, COPPER ALLOY-PLATE SILVER OVER NICKEL
 FIXED CONTACT/TERMINAL, COPPER ALLOY-PLATE SILVER OVER NICKEL

ELECTRICAL:




CONTACT RATING, 100MA@30VDC
 INITIAL CONTACT RESISTANCE, 30 MILLIOHMS MAX
 INSULATION RESISTANCE, 100 MEGOHM MIN.
 DIELECTRIC STRENGTH, 500 V AC FOR 1 MINUTE

MECHANICAL:

ACTUATION FORCE, 200 +/-150 GRAMS
 ACTUATION TRAVEL, .079
 LIFE EXPECTANCY, 10,000 CYCLES

ENVIRONMENTAL:

OPERATING TEMPERATURE, -20 TO +60 DEGREES C
 STORAGE TEMPERATURE, -10 TO +60 DEGREES
 SOLDERABILITY, PER EIA-364-52, CLASS 2, CATEGORY 1,
 95% MINIMUM COVERAGE
 RESISTANCE TO SOLDER HEAT, 250 DEGREES C FOR 5 SECONDS

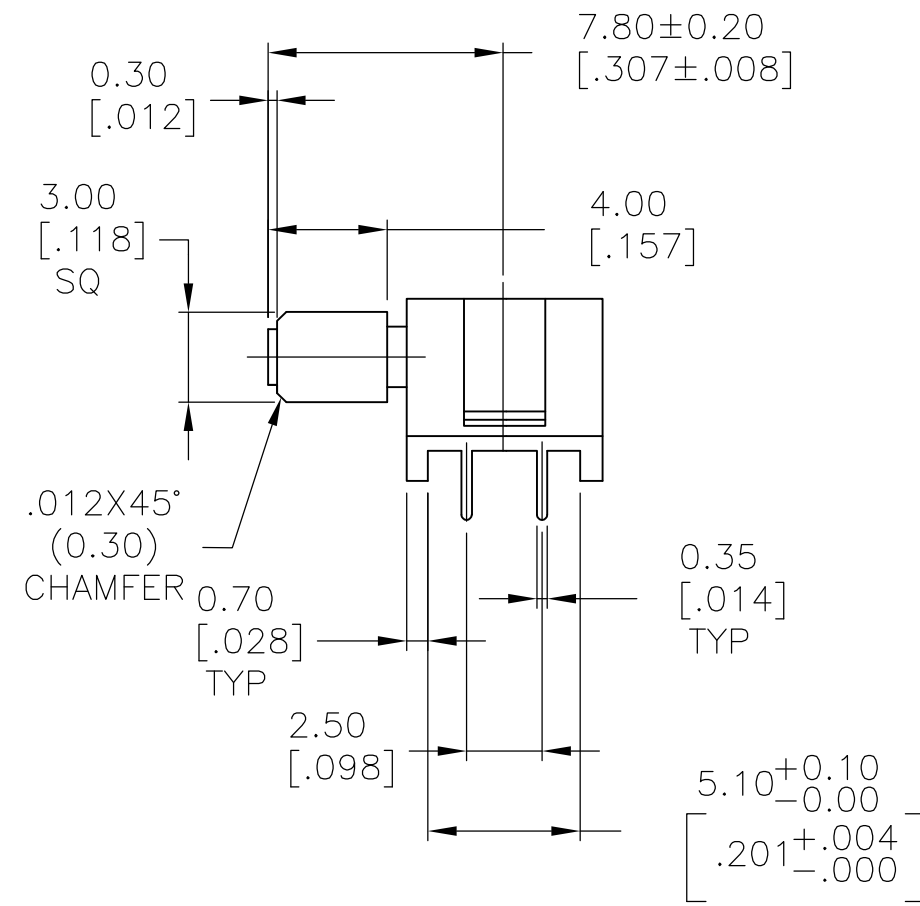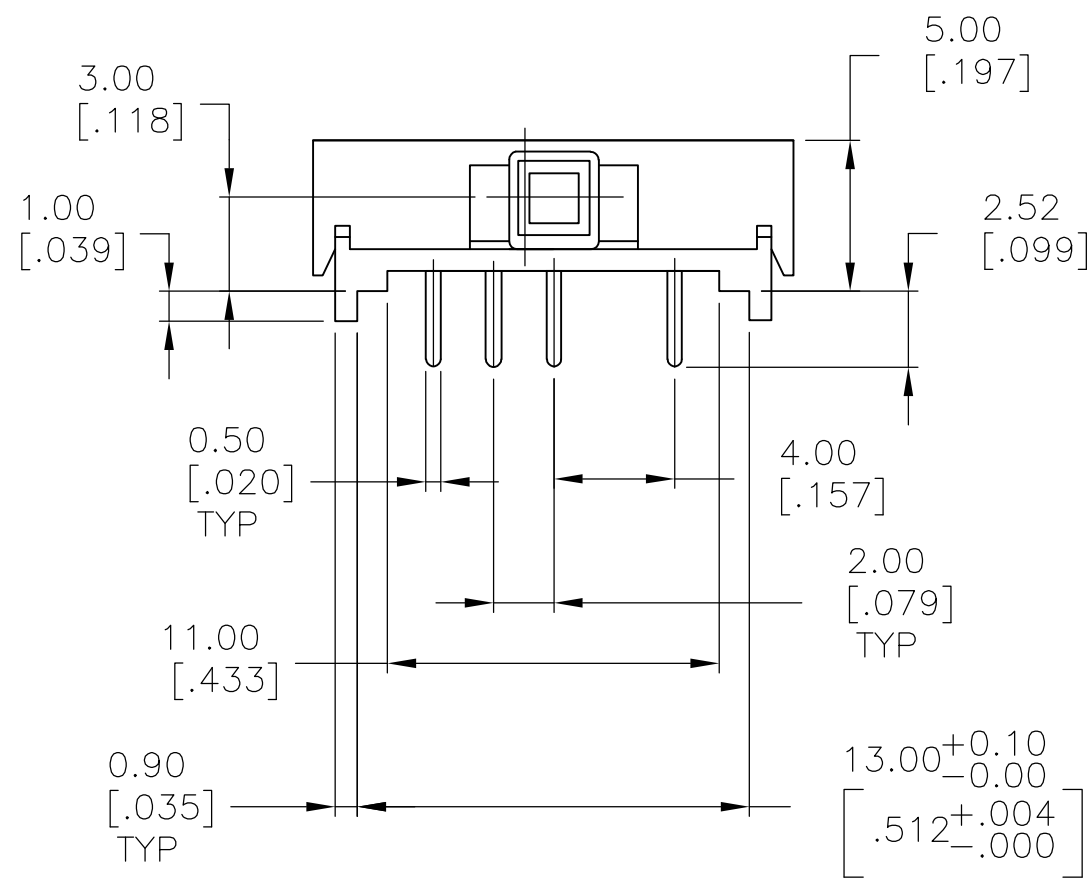

CIRCUIT DIAGRAM

NOTES:

- ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)
- ANTI SOLDER WICK SEAL AT TERMINAL TO BASE INTERFACE

MMS-23R	1437575-9
ALCO PT NO	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER	23OCT08	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK -	APVD -	NAME	
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.30 ±(.012) 4 PLC ± - ANGLES ± 3°	PRODUCT SPEC -	APPLICATION SPEC -	SLIDE SWITCH MMS-23R	
MATERIAL SEE SPECIFICATIONS	FINISH -	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=1437575-9
CUSTOMER DRAWING			SCALE 4:1	SHEET 1 of 1	REV A