

America Semiconductor



"In America Semi We Trust"

MANUFACTURER OF WORLD CLASS HIGH POWER SEMICONDUCTORS

America Semiconductor


Silicon Power Schottky Diode

Features

- High Surge Capability
- Types up to 100 V V_{RRM}

Note:

1. Standard polarity: Stud is cathode.
2. Reverse polarity (R): Stud is anode.
3. Stud is base.



MBR3545 thru MBR35100R

$V_{RRM} = 20\text{ V} - 100\text{ V}$
 $I_F = 35\text{ A}$

DO-4 Package

Maximum ratings, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified ("R" devices have leads reversed)

Parameter	Symbol	Conditions	MBR3545 (R)	MBR3560 (R)	MBR3580 (R)	MBR35100 (R)	Unit
Repetitive peak reverse voltage	V_{RRM}		45	60	80	100	V
RMS reverse voltage	V_{RMS}		32	42	57	70	V
DC blocking voltage	V_{DC}		45	60	80	100	V
Continuous forward current	I_F	$T_C \leq 110\text{ }^\circ\text{C}$	35	35	35	35	A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25\text{ }^\circ\text{C}$, $t_p = 8.3\text{ ms}$	600	600	600	600	A
Operating temperature	T_j		-55 to 150	-55 to 150	-55 to 150	-55 to 150	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to 175	-55 to 175	-55 to 175	-55 to 175	$^\circ\text{C}$

Electrical characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	MBR3545 (R)	MBR3560(R)	MBR3580 (R)	MBR35100 (R)	Unit
Diode forward voltage	V_F	$I_F = 35\text{ A}$, $T_j = 25\text{ }^\circ\text{C}$	0.68	0.75	0.84	0.84	V
Reverse current	I_R	$V_R = 20\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$ $V_R = 20\text{ V}$, $T_j = 125\text{ }^\circ\text{C}$	1.5	1.5	1.5	1.5	mA

Thermal characteristics

Parameter	Symbol	Conditions	MBR3545 (R)	MBR3560(R)	MBR3580 (R)	MBR35100 (R)	Unit
Thermal resistance, junction - case	R_{thJC}		1.5	1.5	1.5	1.5	$^\circ\text{C/W}$







www.AmericaSemi.com

1

America Semiconductor

MBR3545 thru MBR35100R

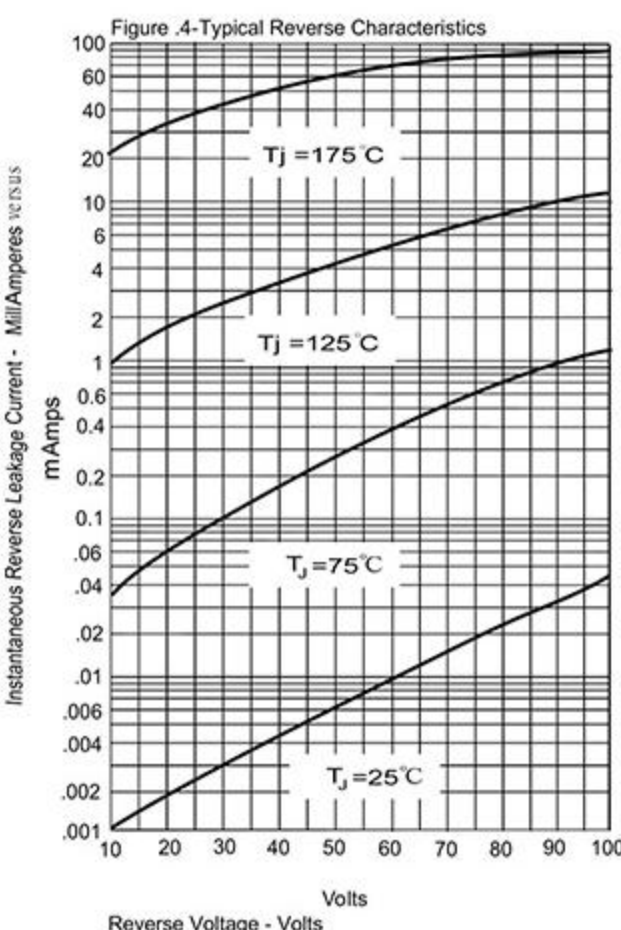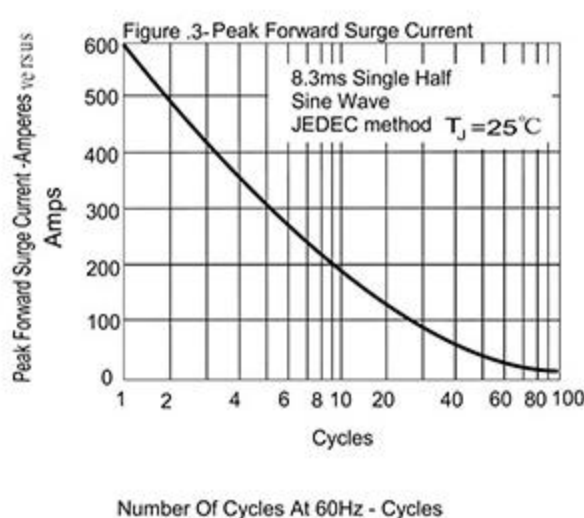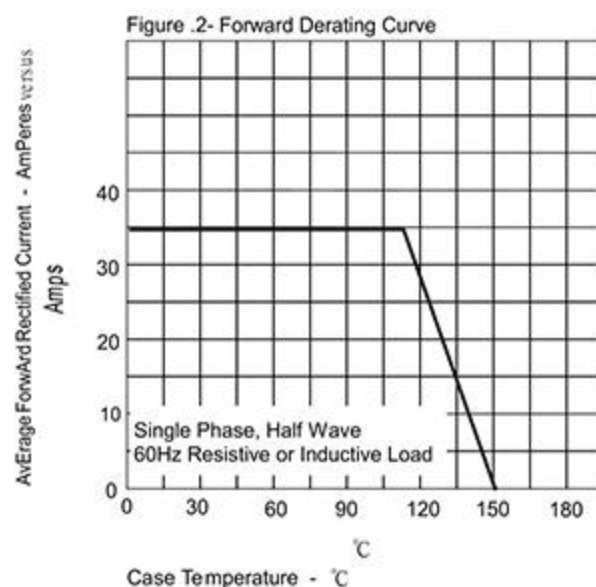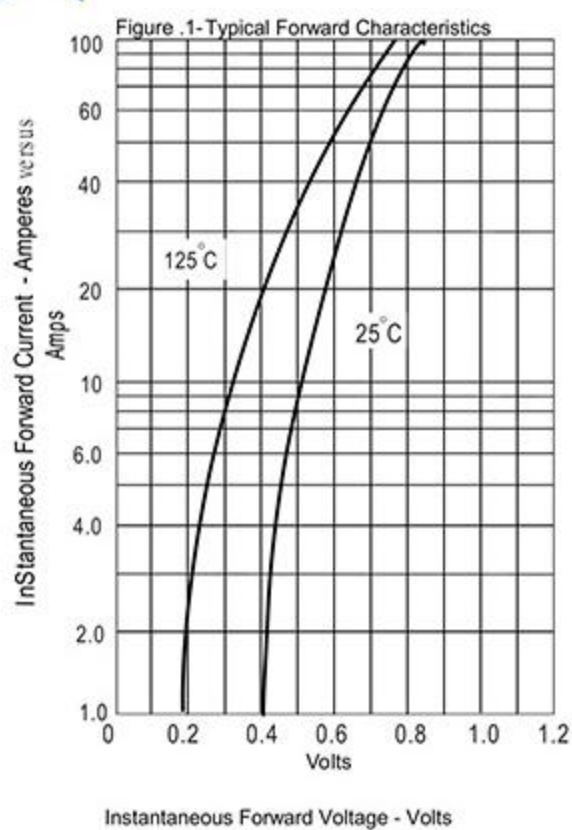

www.AmericaSemi.com

2



null