


4 | 3 | 2 | 1

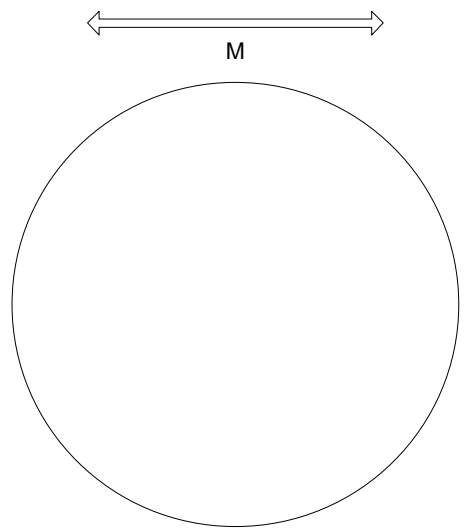


1. MATERIAL: N-35SH SINTERED NdFeB
 Br 11,800 - 12,200 G
 Hc 10,800 - 11,500 Oe
 Hci Over 20,000 Oe
 BH(max) 34-36 MGOe
 T (Max Working) 150 C

2. MAGNETIZATION: ORIENTED AND MAGNETIZED THROUGH THE DIAMETER AS INDICATED BY THE ARROW M.

3. COATING: EPOXY COATED FOR MINIMUM 15 HRS SALT SPRAY. DIMENSIONS APPLY AFTER COATING

6.0 +/- .12 mm
 (.236 +/- .005")

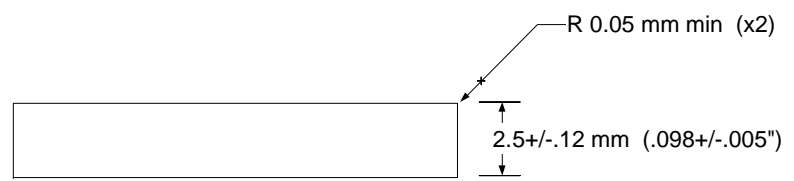

M

This document and information contained within is the property of Alliance LLC and is confidential. Disclosure, reproduction or publication is not permitted without written consent.
Tolerances unless otherwise noted:
 x.x +/- 0.1" (2.54 mm)
 x.xx +/- 0.01" (0.25 mm)
 x.xxx +/- 0.005" (.127 mm)


AUSTRIA MICROSYSTEMS SENSOR MAGNET




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

Dimensions are in mm (inches) unless noted.			
SIZE	MATERIAL	DWG NO	REV
A4	MAGNET NdFeB	072508AMS	0
GRADE	N-35SH	DRAWN BY: DV	SHEET 1 OF 1

4 | 3 | 2 | 1



www.Allianceorg.com

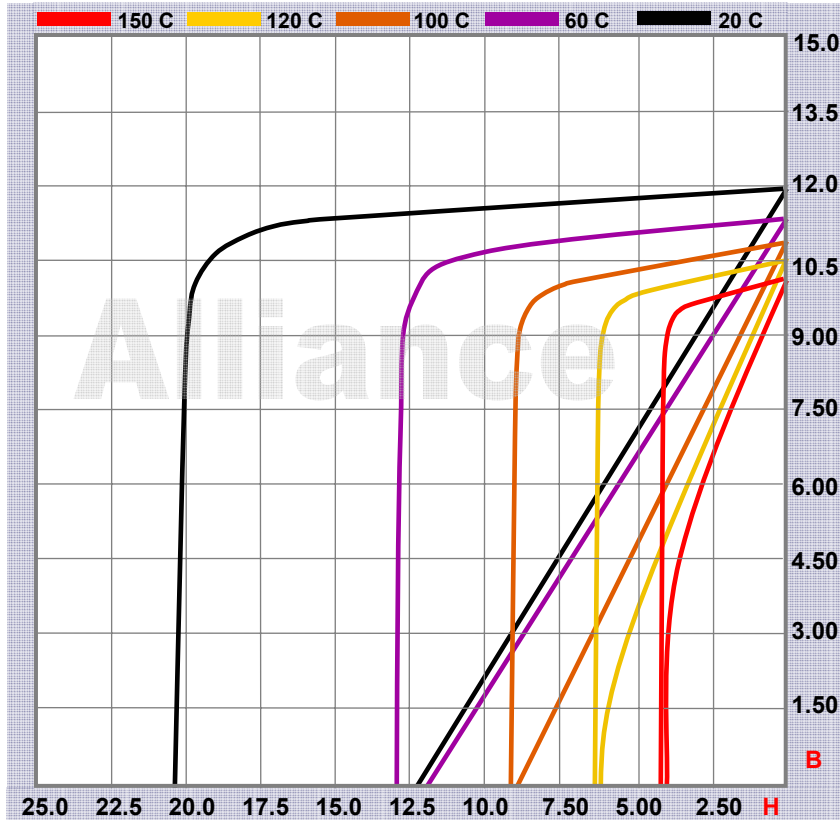

NdFeB N-35SH

		Typical	Minimum
Residual Induction Br	G	12,000	11,700
Coercive Force Hc	Oe	11,500	11,000
Intrinsic Coercive Force Hci	Oe	22,000	20,000
Max. Energy Product (BH)max	MGOe	35	33
Material Density	Lb/in3	.2673	
Max. Operating Temperature	C	150	
Temperature Coefficient for B	-%/C	0.11	
Temperature Coefficient for H	-%/C	0.60	
Required Magnetizing Force	Oe	60,000	
Material Composition	Nd, B, Fe, Dy, Co		

Neodymium Iron Boron magnets, also known as Rare Earths or Neo, have the highest energy product of all permanent magnet materials today. In most cases, no tooling charges exist. Various grades are available, depending on maximum operating temps.

For more information please call or email Alliance technical support at:

Phone: 219-548-3799 Fax: 219-548-7071 email: engineering@allianceorg.com