


# E2UAA10-16.9344M TR



**ECLIPTEK**  
CORPORATION

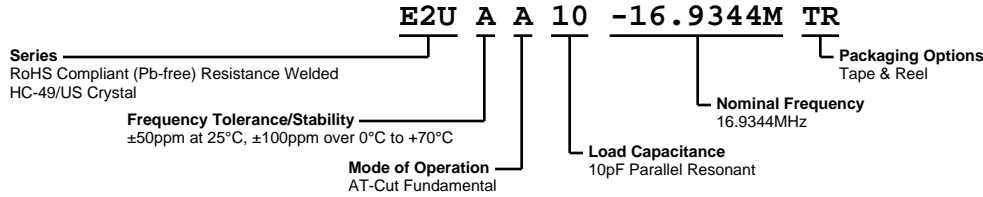


## ELECTRICAL SPECIFICATIONS

|                                      |   |
|--------------------------------------|---|
| <b>Nominal Frequency</b>             | 16.9344MHz                                |
| <b>Frequency Tolerance/Stability</b> | ±50ppm at 25°C, ±100ppm over 0°C to +70°C |
| <b>Aging at 25°C</b>                 | ±5ppm/year Maximum                        |
| <b>Load Capacitance</b>              | 10pF Parallel Resonant                    |
| <b>Shunt Capacitance (C0)</b>        | 7pF Maximum                               |
| <b>Equivalent Series Resistance</b>  | 50 Ohms Maximum                           |
| <b>Mode of Operation</b>             | AT-Cut Fundamental                        |
| <b>Drive Level</b>                   | 1mWatt Maximum                            |
| <b>Storage Temperature Range</b>     | -40°C to +125°C                           |
| <b>Insulation Resistance</b>         | 500 Megaohms Minimum at 100Vdc            |

## ENVIRONMENTAL & MECHANICAL SPECIFICATIONS

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| <b>Fine Leak Test</b>               | MIL-STD-883, Method 1014 Condition A |
| <b>Gross Leak Test</b>              | MIL-STD-883, Method 1014 Condition C |
| <b>Lead Integrity</b>               | MIL-STD-883, Method 2004             |
| <b>Lead Termination</b>             | Sn 2µm - 6µm                         |
| <b>Mechanical Shock</b>             | MIL-STD-202, Method 213 Condition C  |
| <b>Resistance to Soldering Heat</b> | MIL-STD-202, Method 210              |
| <b>Resistance to Solvents</b>       | MIL-STD-202, Method 215              |
| <b>Solderability</b>                | MIL-STD-883, Method 2003             |
| <b>Temperature Cycling</b>          | MIL-STD-883, Method 1010             |
| <b>Vibration</b>                    | MIL-STD-883, Method 2007 Condition A |

## MECHANICAL DIMENSIONS (all dimensions in millimeters)

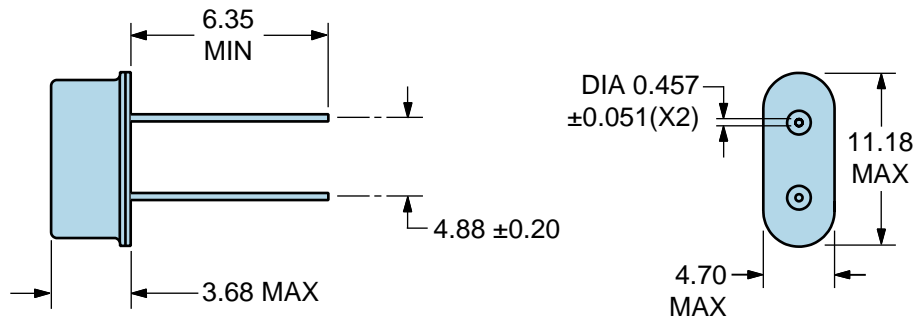


| LINE | MARKING   |
|------|---|
| 1    | <b>E16.934M</b><br>E=Eclipsek Designator<br>M=MHz |

# E2UAA10-16.9344M TR

## Tape & Reel Dimensions

Quantity Per Reel: 1,000 Pieces

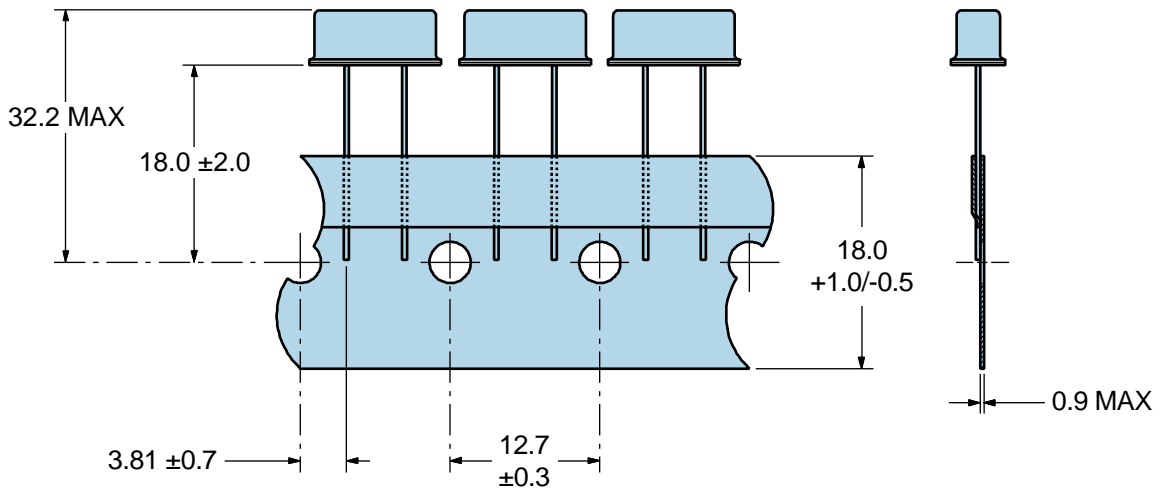

\*Compliant to EIA 468B



## Recommended Solder Reflow Methods



### High Temperature Solder Bath (Wave Solder)

|  |                                      |
|--|--------------------------------------|
| <b>T<sub>s</sub> MAX to T<sub>L</sub> (Ramp-up Rate)</b> | 3°C/second Maximum                   |
| <b>Preheat</b>   |                                      |
| - Temperature Minimum (T <sub>s</sub> MIN)               | 150°C                                |
| - Temperature Typical (T <sub>s</sub> TYP)               | 175°C                                |
| - Temperature Maximum (T <sub>s</sub> MAX)               | 200°C                                |
| - Time (t <sub>s</sub> MIN)                              | 60 - 180 Seconds                     |
| <b>Ramp-up Rate (T<sub>L</sub> to T<sub>p</sub>)</b>     | 3°C/second Maximum                   |
| <b>Time Maintained Above:</b>                            |                                      |
| - Temperature (T <sub>L</sub> )                          | 217°C                                |
| - Time (t <sub>L</sub> )                                 | 60 - 150 Seconds                     |
| <b>Peak Temperature (T<sub>p</sub>)</b>                  | 260°C Maximum for 10 Seconds Maximum |
| <b>Target Peak Temperature (T<sub>p</sub> Target)</b>    | 250°C +0/-5°C                        |
| <b>Time within 5°C of actual peak (t<sub>p</sub>)</b>    | 20 - 40 seconds                      |
| <b>Ramp-down Rate</b>                                    | 6°C/second Maximum                   |
| <b>Time 25°C to Peak Temperature (t)</b>                 | 8 minutes Maximum                    |
| <b>Moisture Sensitivity Level</b>                        | Level 1                              |

## Recommended Solder Reflow Methods



### Low Temperature Solder Bath (Wave Solder)

|  |   |
|--|---|
| $T_s$ MAX to $T_L$ (Ramp-up Rate)                          | 5°C/second Maximum                                    |
| <b>Preheat</b>   |   |
| - Temperature Minimum ( $T_s$ MIN)                         | N/A   |
| - Temperature Typical ( $T_s$ TYP)                         | 150°C   |
| - Temperature Maximum ( $T_s$ MAX)                         | N/A   |
| - Time ( $t_s$ MIN)  | 30 - 60 Seconds                                       |
| <b>Ramp-up Rate (<math>T_L</math> to <math>T_p</math>)</b> | 5°C/second Maximum                                    |
| <b>Time Maintained Above:</b>                              |   |
| - Temperature ( $T_L$ )                                    | 150°C   |
| - Time ( $t_L$ )   | 200 Seconds Maximum                                   |
| <b>Peak Temperature (<math>T_p</math>)</b>                 | 245°C Maximum   |
| <b>Target Peak Temperature (<math>T_p</math> Target)</b>   | 245°C Maximum 1 Time / 235°C Maximum 2 Times          |
| <b>Time within 5°C of actual peak (<math>t_p</math>)</b>   | 5 seconds Maximum 1 Time / 15 seconds Maximum 2 Times |
| <b>Ramp-down Rate</b>                                      | 5°C/second Maximum                                    |
| <b>Time 25°C to Peak Temperature (t)</b>                   | N/A   |
| <b>Moisture Sensitivity Level</b>                          | Level 1   |

### Low Temperature Manual Soldering

185°C Maximum for 10 seconds Maximum, 2 times Maximum.

### High Temperature Manual Soldering

260°C Maximum for 5 seconds Maximum, 2 times Maximum.