

Terminal blocks

to **Type 220** and **Type 179**

- ASP046** page 50
- Type 213** page 100
- Type 214** page 100
- Type 249** page 98
- Type 250** page 98

Accessories

for **Type 220** and **Type 179**
Coding set
 700024 page 206

Note for Type 179

Packaging for automated processing is available on demand. Please do not hesitate to contact us.


Type 220

Header, centerline 5.08 mm / 0.200 inches, vertical mounting, square contact pins 1 mm / 0.039 inches, closed ends, codable

Technical Data

	V / A	300 / 15
	V / A	300 / 15
		250 V / 4 kV / 10 A
Insulation co-ordination according to EN 60664-1		
Clearance and creepage distances	min. 4.08 mm	
Insulating material class	CTI 600	
Overvoltage category	III	III II
Pollution degree	3	2 2
Rated voltage	320	800 800
Rated test voltage	4	6 4
Protection category according to IEC 529	IP00	
Solder pin dimension	1.0 x 1.0 mm	
Recommended pc board hole dia.	Ø 1.5 mm	
Solder pin length	3.25 mm	
Pole size	2 - 24	
Color	black	

Dimensions in mm 1 mm = 0.0394 in.

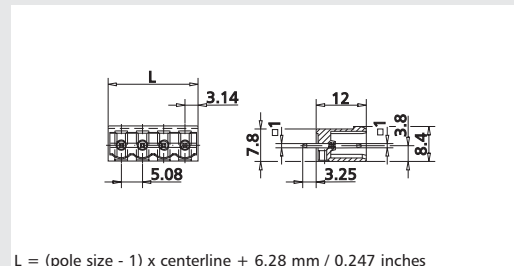

$L = (\text{pole size} - 1) \times \text{centerline} + 6.28 \text{ mm} / 0.247 \text{ inches}$

Part numbers (P/N)

(information: page 110)

Complete the part number by adding the pole size.

Type 220

centerline 5.08 mm / 0.200 inches

P/N 312201

	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24

Type 220

centerline 10.16 mm / 0.400 inches

P/N 312202

	02	03	04	05	06	07	08
09	10	11	12				

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.


Type 179

Header, centerline 5.08 mm / 0.200 inches, vertical mounting, designed for THR, optional Tape on Reel packaging for automated processing, square contact pins 1 mm / 0.039 inches, closed ends, codable

Technical Data

		250 V / 4 kV / 10 A
Insulation co-ordination according to EN 60664-1		
Clearance and creepage distances	min. 4.08 mm	
Insulating material class	CTI 600	
Overvoltage category	III	III II
Pollution degree	3	2 2
Rated voltage	320	800 800
Rated test voltage	4	6 4
Protection category according to IEC 529	IP00	
Solder pin dimension	1.0 x 1.0 mm	
Recommended pc board hole dia.	Ø 1.5 mm	
Solder pin length	3.25 mm	
Pole size	2 - 12	
Color	black	

Dimensions in mm 1 mm = 0.0394 in.

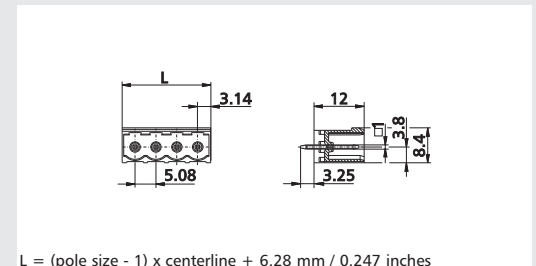

$L = (\text{pole size} - 1) \times \text{centerline} + 6.28 \text{ mm} / 0.247 \text{ inches}$

Part numbers (P/N)

(information: page 110)

Complete the part number by adding the pole size.

Type 179

centerline 5.08 mm / 0.200 inches

P/N 311791

	02	03	04	05	06	07	08
09	10	11	12				

* approval pending

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.