


## Sealed Connectors (Continued)

No. of Pos.	Dimensions				Part Nos.	
	A	B	C	D	.156 [3.96]	.235 [5.97]
140	7.855 199.52	7.565 192.15	7.165 181.99	6.900 175.26	—	1-534650-3
134	7.555 191.90	7.265 184.53	6.865 174.37	6.600 167.64	—	1-534650-2
130	7.355 186.82	7.065 179.45	6.555 166.50	6.400 162.56	—	1-534650-1
120	6.855 174.12	6.565 166.75	6.165 156.59	5.906 149.86	—	1-534650-0
110	6.355 161.42	6.065 154.05	5.655 143.64	5.400 137.16	534195-9	534650-9
100	5.855 148.72	5.565 141.35	5.165 131.19	4.900 124.46	—	—
90	5.355 136.02	5.065 128.65	4.655 118.24	4.400 111.76	534195-7	—
80	4.855 123.32	4.565 115.95	4.165 105.79	3.900 99.06	534195-6	—
70	4.355 110.62	4.065 103.25	3.655 92.84	3.400 86.36	534195-5	—
60	3.855 97.92	3.565 90.55	3.165 80.38	2.900 73.86	534195-4	—
50	3.355 85.22	3.065 77.85	2.655 67.44	2.400 60.36	534195-3	534650-3
40	2.855 72.52	2.565 65.15	2.165 54.98	1.900 48.26	534195-2	—
30	2.355 59.82	2.065 52.45	1.655 42.29	1.400 35.56	534195-1	—

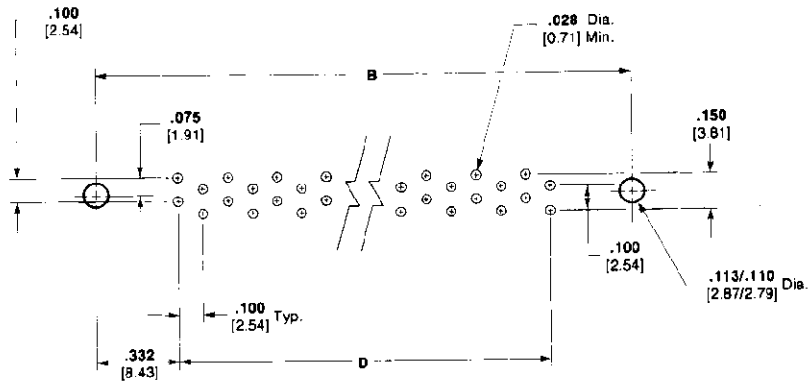

Recommended Pc Board Layout