


**Federleiste,
Leiter-an-Leiterplatte
Ausführung**

Für Schaltdraht 0,4–0,5 mm Ø
Schaltlitze 0,22–0,25 mm²,
7drähtig Ø 0,2 mm

Handzange:

Best.-Nr. **656154-2**

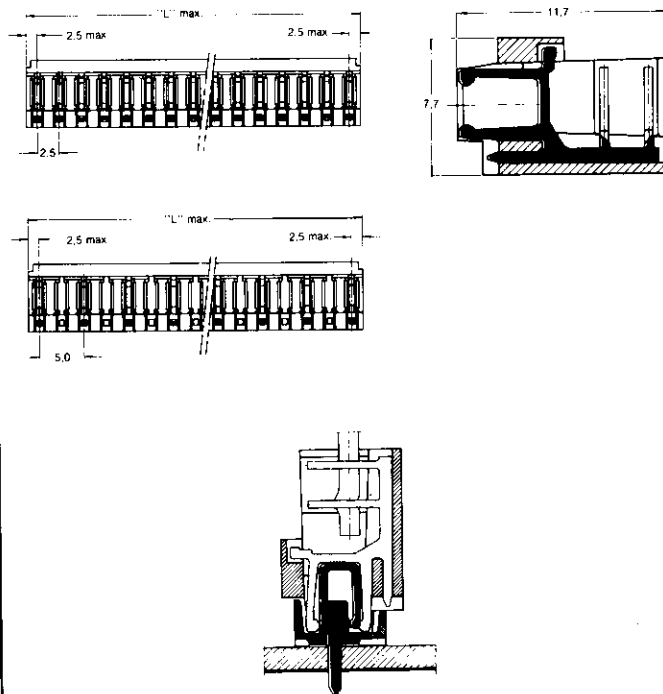

**Female
Wire-to-Board
Connectors**

For solid wire 0.4–0.5 mm dia.
Stranded wire 0.22–0.25 mm²
7 strands 0.2 mm dia.

Hand Tool:

Part No. **656154-2**

Raster 2,5 mm

Polzahl No. of Positions	Bestell-Nummern/Part Numbers		L _{max.} mm
	CuZn Brass	CuSn Phosphor Bronze	
3	164851-3	161700-3	10,1
4	164851-4	161700-4	12,6
5	164851-5	161700-5	15,1
6	164851-6	161700-6	17,6
7	164851-7	161700-7	20,1
8	164851-8	161700-8	22,6
9	164851-9	161700-9	25,1
10	1-164851-0	1-161700-0	27,6
11	1-164851-1	1-161700-1	30,1
12	1-164851-2	1-161700-2	32,6
13	1-164851-3	1-161700-3	35,1
14	1-164851-4	1-161700-4	37,6
15	1-164851-5	1-161700-5	40,1
16	1-164851-6	1-161700-6	42,6
17	1-164851-7	1-161700-7	45,1
18	1-164851-8	1-161700-8	47,6
19	1-164851-9	1-161700-9	50,1
20	2-164851-0	2-161700-0	52,6

Centerline 2.5 mm

Raster 5,0 mm

Polzahl No. of Positions	Bestell-Nummern/Part Numbers		L _{max.} mm
	CuZn Brass	CuSn Phosphor Bronze	
2	164852-2	161701-2	10,1
3	164852-3	161701-3	15,1
4	164852-4	161701-4	20,1
5	164852-5	161701-5	25,1
6	164852-6	161701-6	30,1
7	164852-7	161701-7	35,1
8	164852-8	161701-8	40,1
9	164852-9	161701-9	45,1
10	1-164852-0	1-161701-0	50,1
11	1-164852-1	1-161701-1	55,1
12	1-164852-2	1-161701-2	60,1
13	1-164852-3	1-161701-3	65,1
14	1-164852-4	1-161701-4	70,1
15	1-164852-5	1-161701-5	75,1

Centerline 5.0 mm