

MAR 31 1983

1. SCOPE

TENTATIVE

1.1. Content

This specification covers the performance, tests and quality requirements for the shielding accessories used with AMPMODU* Mass Terminated (MT) Interconnection System. These accessories consist of add-on metal shells and ferrules for both bulkhead and printed wiring board application.

1.2. Qualification

When tests are performed on the subject product line, the procedures specified in AMP 109 series specifications shall be used. All inspections shall be performed using the applicable inspection plan and product drawing.

2. APPLICABLE DOCUMENTS

The following documents form a part of this specification to the extent specified herein. In the event of conflict between the requirements of this specification and the product drawing, the product drawing shall take precedence. In the event of conflict between the requirements of this specification and the referenced documents, this specification shall take precedence.

2.1. AMP Specifications

- A. 108-25015: Connector, AMPMODU Mass Terminated, Standard Pressure
- B. 109-1: General Requirements for Test Specifications
- C. 109 Series: Test Specifications as indicated in Figure 1.
(Comply with MIL-STD-202, MIL-STD 1344 and EIA RS-364)

2.2. Federal Specifications

- A. QQ-B-613: Brass, Leaded and Non-Leaded
- B. QQ-B-750: Phosphor Bronze
- C. QQ-C-576: Copper Flat Products with Slit, Slit and Edge-Rolled, Sheared, Sawed or Machined Edges

*Trademark of AMP Incorporated.

TENTATIVE This specification is based on design objectives and is strictly tentative. Although preliminary test data may exist the specification is subject to change based on the results of additional testing and evaluation. Accordingly, AMP Incorporated makes no representation or warranty expressed or implied that the product described herein will comply with this specification.				DR		AMP AMP INCORPORATED Harrisburg, Pa. 17105	
				CHK			
				APP		LOC B	NO 108-25030
SHEET 1 OF 7		TITLE INTERCONNECTION SYSTEM, AMPMODU MT, SHIELDING ACCESSORIES					
LTR		REVISION RECORD		APP		DATE	

BY AMP INCORPORATED HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

DIST
25

3. REQUIREMENTS

3.1. Design and Construction

Shielding accessories shall be of the design, construction and physical dimensions specified on the applicable product drawing.

3.2. Materials

- A. Shield shells: Copper alloy
- B. Ferrule: Copper

3.3. Ratings

- A. Current: 3 amperes maximum
- B. Operating Temperature: -65° to 105°C

3.4. Performance and Test Description

Shielding accessories shall be designed to meet the electrical, mechanical and environmental performance requirements specified in Figure 1.

3.5. Test Requirements and Procedures Summary

Test Description	Requirement	Procedure												
Examination of Product	Meets requirements of product drawing.	Visual, dimensional and functional per applicable inspection plan.												
ELECTRICAL														
Dielectric Withstanding Voltage	<table><tr><td>Test Voltage</td><td>Altitude</td></tr><tr><td>D.C.</td><td>Feet</td></tr><tr><td>750</td><td>Sea Level</td></tr><tr><td>300</td><td>50,000</td></tr><tr><td>275</td><td>70,000</td></tr><tr><td colspan="2">No breakdown or flashover.</td></tr></table>	Test Voltage	Altitude	D.C.	Feet	750	Sea Level	300	50,000	275	70,000	No breakdown or flashover.		Test between shielding hardware and current carrying contacts of mated connector assemblies; AMP Spec 109-29-1.
Test Voltage	Altitude													
D.C.	Feet													
750	Sea Level													
300	50,000													
275	70,000													
No breakdown or flashover.														
Shielding Effectiveness	Right angle connectors, 25 dB minimum between 30 M Hz - 300 M Hz; bulkhead connectors, 30 dB minimum between 30 M Hz - 1000 M Hz.	Measure shielding effectiveness of double ended single braid cable; AMP Spec 109-90.												

Figure 1 (cont)

AMP	AMP INCORPORATED Harrisburg, Pa. 17105	LOC	SHEET	NO	REV
		B	2 OF 7	108-25030	0

Test Description	Requirement	Procedure
MECHANICAL		
Vibration (b)	No discontinuities greater than 1 microsecond.	Subject mated connectors to 15 G's, 10-2000 Hz with 100 ma current applied; AMP Spec 109-21-3.
Physical Shock	No discontinuities greater than 1 microsecond.	Subject mated connectors to 100 G's sawtooth in 6 milliseconds; 3 shocks in each direction applied along the 3 mutually perpendicular planes total 18 shocks; AMP Spec 109-26-9.
Mating Force	1.0 pound maximum per position for right angle connector; 1.1 pounds maximum per position for bulkhead connector.	Measure force necessary to mate connector assembly on fourth mating at a rate of 0.5 inch/minute; AMP Spec 109-42, cond A, calculate force per position.
Unmating Force	.3 pound minimum per position for right angle and bulkhead connectors.	Measure force necessary to unmate connector assembly at a rate of 0.5 inch/minute; AMP Spec 109-42, cond A, calculate force per position.
Durability	No physical damage.	Mate and unmate connector assemblies for 200 cycles; AMP Spec 109-27.
ENVIRONMENTAL		
Thermal Shock (b)	Dielectric withstanding voltage; shielding effectiveness.	Subject mated connectors to 5 cycles between -65° and 105°C; AMP Spec 109-22.
Humidity-Temperature Cycling	Shielding effectiveness.	Subject mated connectors to 10 humidity-temperature cycles between 25° and 65°C at 95% RH; AMP Spec 109-23, method III, cond B, with cold shock at -10°C, less step 7b.
Figure 1 (cont)		
AMP AMP INCORPORATED Harrisburg, Pa. 17105		LOC B
SHEET 3 OF 7		NO 108-25030
		REV 0

Test Description	Requirement	Procedure
Industrial Mixed Flowing Gas	Shielding effectiveness.	Subject mated connectors to environmental class II for 10 days; AMP Spec 109-85-2.
Temperature Life (b)	Shielding effectiveness.	Subject mated connectors to temperature life, AMP Spec 109-43, test level 9, test duration I.

- (a) The continuous current rating for individual contacts cannot be applied directly to the number of contacts as they are dependent on the thermal and physical properties of the materials. System design shall assure that continuous current rating does not create internal hot spots that exceed the temperature designated by the connector specification, during steady-state or transient conditions.
- (b) Shall remain mated and show no evidence of damage, cracking or chipping.

Figure 1 (end)

AMP

AMP INCORPORATED
Harrisburg, Pa. 17105

LOC
B

SHEET
4 OF 7

NO

108-25030

REV
0

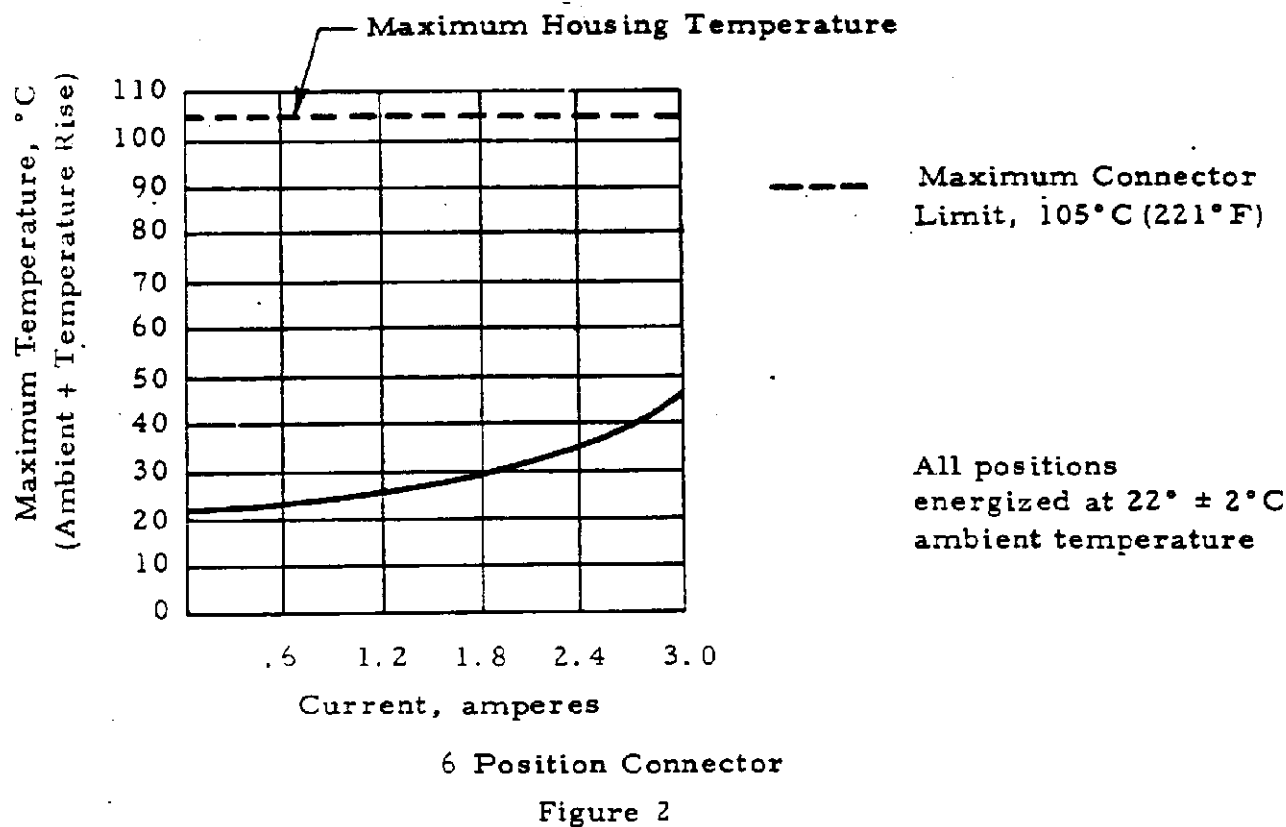
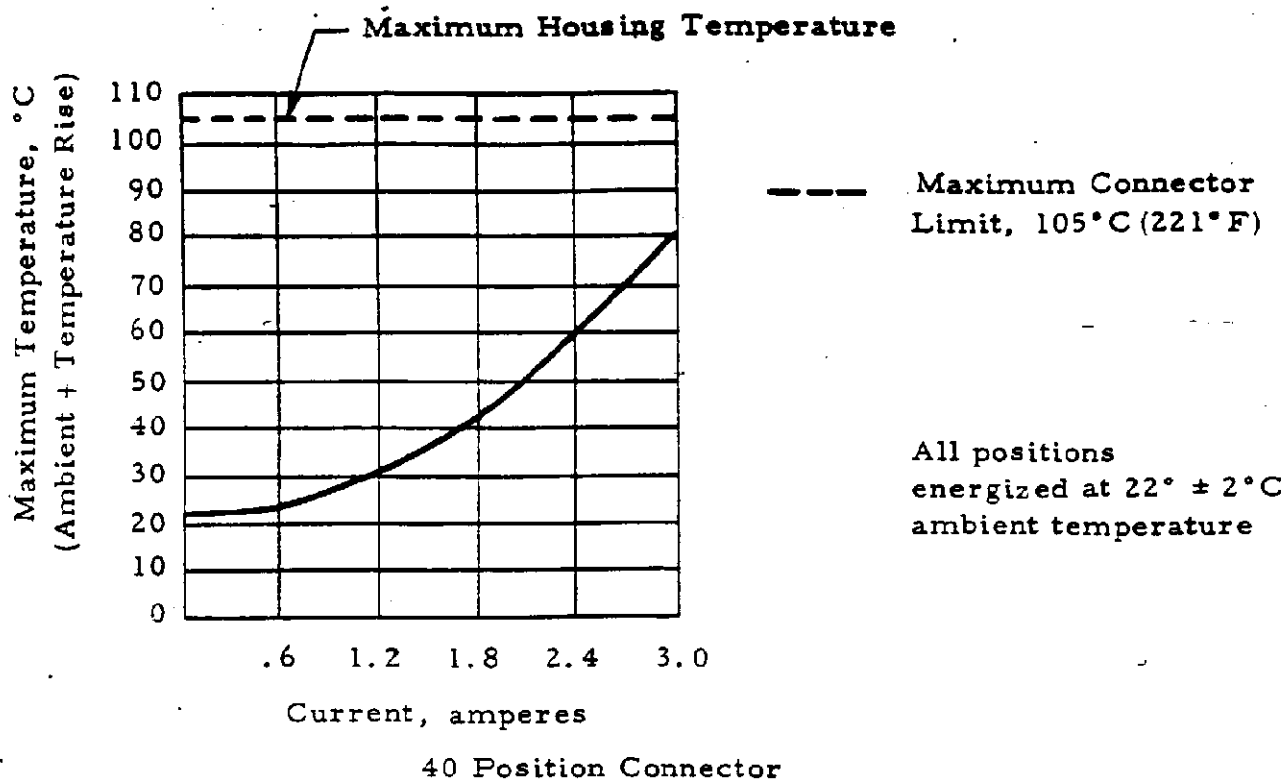


Figure 2

AMP

AMP INCORPORATED
Harrisburg, Pa. 17105

LOC
B

SHEET
5 OF 7

NO
108-25030

REV
0

3.6. Shielding Accessories Tests and Sequences

Test or Examination	Test Group (a)			
	1	2	3	4
	Test Sequence (b)			
Examination of Product	1	1	1	1
Dielectric Withstanding Voltage	2,8			
Shielding Effectiveness	9	2,5,7	2,4	
Vibration	5~			
Physical Shock	6			
Mating Force	3			2,6
Unmating Force	4			3,5
Durability		3		4
Thermal Shock	7			
Humidity-Temperature Cycling		4		
Industrial Mixed Flowing Gas		6		
Temperature Life			3	

(a) See Para 4.1.A.

(b) Numbers indicate sequence in which tests are performed.

Figure 3

4. QUALITY ASSURANCE PROVISIONS

4.1. Qualification Testing

A. Sample Selection

Connector housings and contacts shall be prepared in accordance with applicable Instruction Sheets. They shall be selected at random from current production. Test groups 1, 2 and 3 shall consist of 4 six foot cables having #24 AWG wire with single braid shielding and shielded connectors, complete with shielding hardware, on each end. Two cables in each group shall be terminated on both ends with 40 position or greater bulkhead connectors and the other 2 cables with 20 position or less right angle connectors. All contacts shall be 30 microinch gold plated and mated with 30 microinch gold plated header assemblies. Test group 4 shall consist of 4 connector and header assemblies without cable, 2 each of the right angle and bulkhead.

B. Test Sequence

Qualification inspection shall be verified by testing samples as specified in Figure 3.

AMP

AMP INCORPORATED
Harrisburg, Pa. 17105

LOC
B

SHEET
6 OF 7

NO

108-25030

REV
0

C. Acceptance . . .

- (1) All samples tested in accordance with this specification shall meet the stated tolerance limit.
- (2) Failures attributed to equipment, test setup, or operator deficiencies shall not disqualify the product. When product failure occurs, corrective action shall be taken and samples resubmitted for qualification.

4.2. Quality Conformance Inspection

The applicable AMP inspection plan will specify the sampling acceptable quality level to be used. Dimensional and functional requirements shall be in accordance with the applicable product drawing and this specification.

AMP	AMP INCORPORATED Harrisburg, Pa. 17105	LOC	SHEET	NO	108-25030	REV
		B	7 OF 7			0