



- 1 MAX PANEL THICKNESS .240
- 2 CRIMP TOOL: 220190-1
- 3 BULK PACKAGE
- 4 USE INSTRUCTION SHEET 9763
- 5 SPECIAL PACKAGING: BULK PACKAGE 25 PIECES

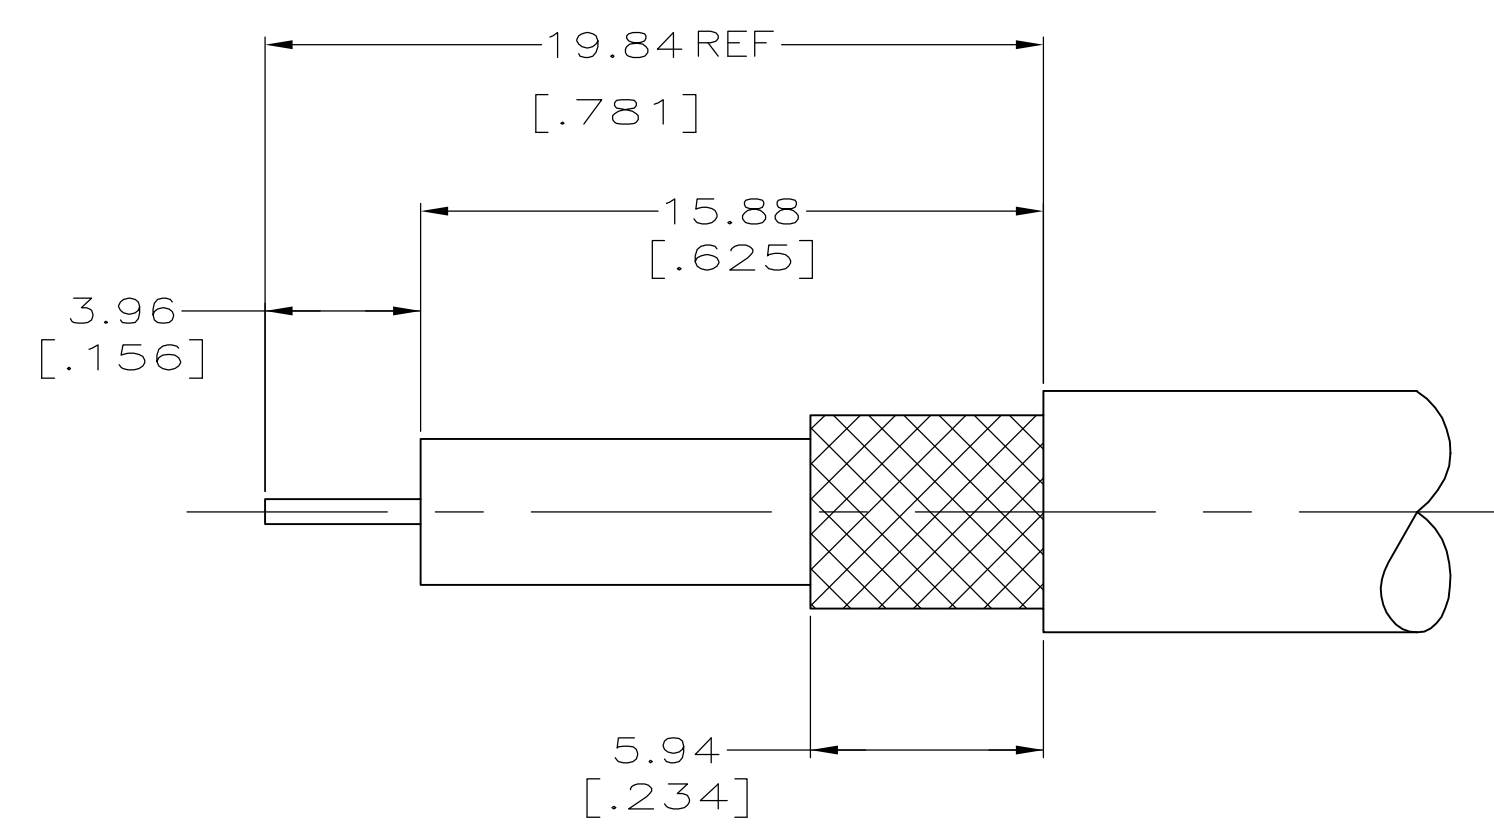

VIEW A

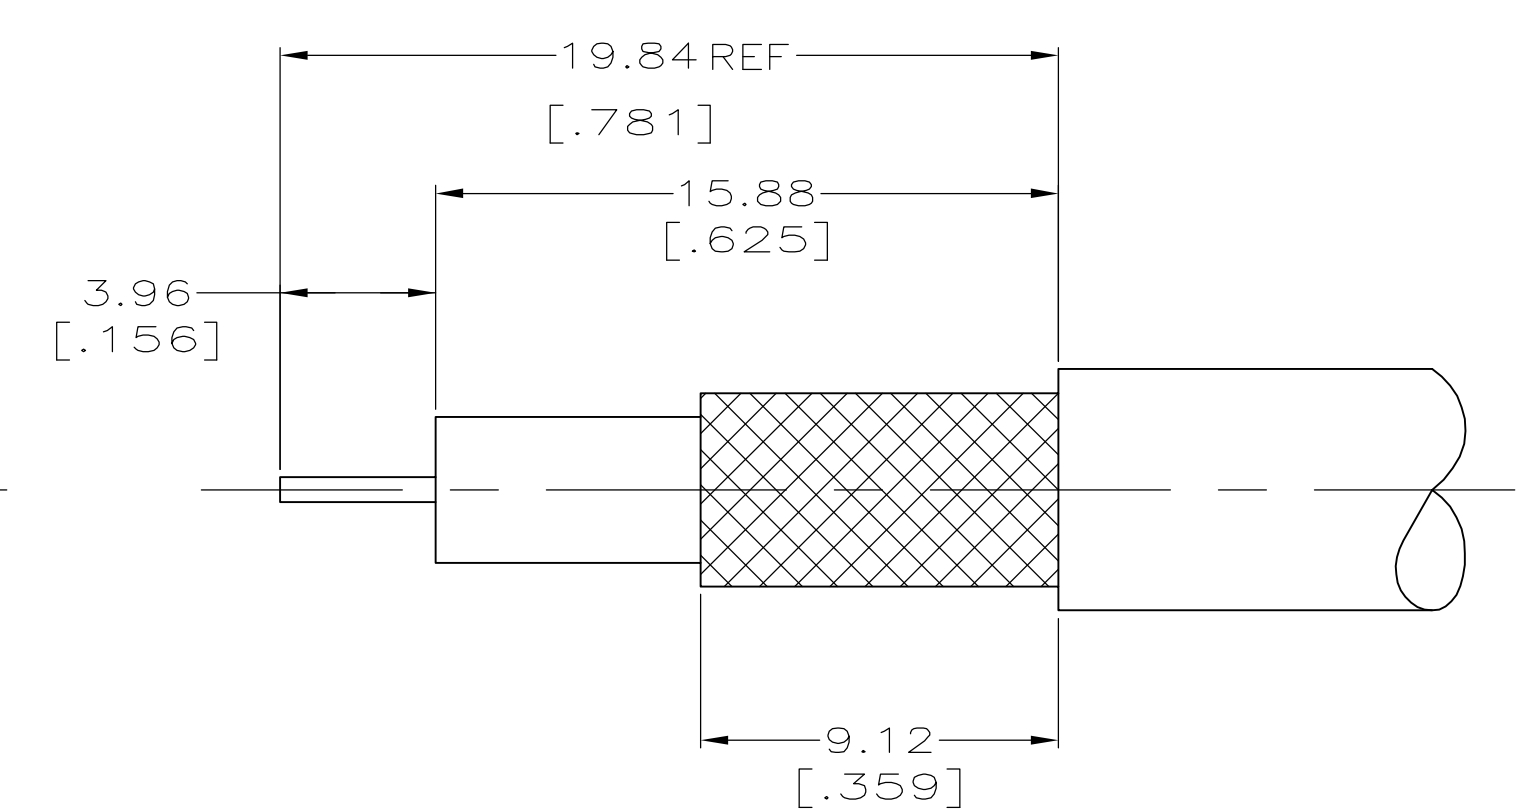

VIEW B

RECOMMENDED PANEL CUTOUT

RECOMMENDED STRIP LENGTH

OBSOLETE	CUSTOM CABLE, C/C-24AWG, DOD-.109, JOD-.153	A	4.52	[.178]	1.07	[.042]	852922-2	-	-	329633	1-329631-2	1-329632-2	9-221132-6	413746-5	413744-2	1-413590-7
NOT RELEASED	-	A	4.52	[.178]	1.07	[.042]	852922-1	-	-	-	-	-	-	-	-	1-413590-6
NOT RELEASED	-	A	4.52	[.178]	1.07	[.042]	852922-1	-	-	-	-	-	-	-	-	1-413590-5
OBSOLETE	JIS 3C-2V	A	4.52	[.178]	1.07	[.042]	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-4	2-413746-5	413744-7	1-413590-4
OBSOLETE	BELDEN 8218 AND JIS 2.5C-2V	A	4.52	[.178]	1.07	[.042]	852922-2	-	-	329633	1-329631-2	1-329632-2	9-221132-6	1-413746-0	413744-2	1-413590-3
OBSOLETE	JIS 2.5C-2W	A	5.41	[.213]	1.07	[.042]	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-0	1-413746-0	413744-2	1-413590-2
OBSOLETE	JIS 3C-2W	A	6.48	[.255]	1.07	[.042]	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-9	2-413746-5	413744-6	1-413590-1
OBSOLETE	ZENITH (C/C-.020, DOD-.115, JOD-.210)	A	5.41	[.213]	1.07	[.042]	852922-1	-	-	-	-	-	8-221132-9	2-413746-5	413744-5	1-413590-0
OBSOLETE	RG-59 TYPE WITH Ø.031 C/C & BELDEN 9295,9266,9240	A	6.48	[.255]	1.07	[.042]	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-1	2-413746-0	413744-1	413590-9
OBSOLETE	RG-179/U & 187/U	A	4.52	[.178]	1.07	[.042]	852922-2	222001-6	227194-2	329633	1-329631-2	1-329632-2	9-413658-0	1-413746-5	413744-2	413590-8
OBSOLETE	AT&T 734A	A	6.48	[.255]	1.07	[.042]	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-3	2-413746-0	413744-4	413590-7
OBSOLETE	TIMES RG-59 DOUBLE BRAIDED,.270 O.D.	A	8.23	[.324]	1.07	[.042]	852922-3	-	-	329633	1-329631-2	1-329632-2	9-221132-2	413746-5	413744-1	413590-6
OBSOLETE	BELDEN 8281,9231 & AT&T 728 AND JIS 5C-2V	B	8.23	[.324]	1.07	[.042]	852922-3	-	-	329633	1-329631-2	1-329632-2	9-221132-2	2-413746-0	413744-3	413590-5
OBSOLETE	AT&T KS 19224 L2 AND JIS 1.5C-XV	A	4.52	[.178]	1.07	[.042]	852922-2	222001-6	227194-2	329633	1-329631-2	1-329632-2	9-413658-2	1-413746-5	413744-2	413590-4
OBSOLETE	BELDEN 8218 AND JIS 2.5C-2V	A	4.52	[.178]	1.07	[.042]	852922-2	-	-	329633	1-329631-2	1-329632-2	9-221132-6	1-413746-0	413744-2	413590-3
OBSOLETE	RG-59/U,59A/U & 59B/U	A	6.48	[.255]	1.07	[.042]	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-1	413746-5	413744-1	413590-2
OBSOLETE	BELDEN 88241	A	6.48	[.255]	1.07	[.042]	852922-1	-	-	329633	1-329631-2	1-329632-2	9-413658-3	413746-5	413744-1	413590-1

FOR USE WITH CABLE	VIEW	FERRULE (HEX) CRIMP HEIGHTS	CONTACT (SQ) CRIMP HEIGHTS	DIE SET	8 TUBING, METAL QTY=1	7 TUBING, PLASTIC QTY=1	6 GASKET QTY=1	5 JAM NUT QTY=1	4 LOCKWASHER QTY=1	3 FERRULE QTY=1	2 CONTACT QTY=1	1 JACK ASSY QTY=1	PART NUMBER
--------------------	------	--------------------------------	-------------------------------	---------	--------------------------	----------------------------	-------------------	--------------------	-----------------------	--------------------	--------------------	----------------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	0.41 [016]
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-
FINISH	-	-

MATERIAL: - FINISH: -

APPROVED: R. E. RUTH

DATE: 4/26/90

NAME: -

PRODUCT SPEC: -

APPLICATION SPEC: -

WEIGHT: -

CUSTOMER DRAWING

TYCO Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608

JACK, BULKHEAD, 75 OHM, HEX CRIMP, BNC

SIZE: A1 CASE CODE: 00779 DRAWING NO: 413590

SCALE: 1:1 SHEET: 1 OF 1 REV: V1