






Personal Systems Products Computer Industry

Logic Sockets and Programming Devices

Top Actuated Switches,
Surface Mount with
Strippable Seal






Standard Pitch (.100 [2.54] Centers)
(7400 Series)

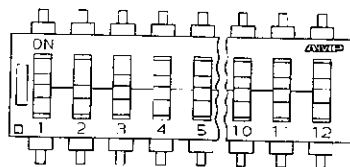

Product Facts:

- Mechanical switches for digital programming on printed circuit boards
- .100 [2.54] x .339 [8.60] pad centers
- IR and Vapor Phase compatible (up to 260°C for 60 seconds)
- 2,000 cycles minimum (Standard Pitch)
1000 cycles minimum (Half Pitch)

Half Pitch (.050 [1.27] Centers)
(7500 Series)

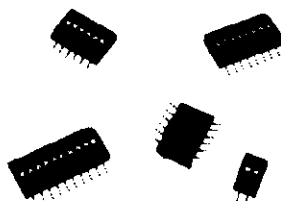

Material and Finish:
Housing and Actuators – IR
and Vapor Phase Compatible
thermoplastic, JLE4V-C rated
Contact and Lead – Copper alloy,
contact plated gold over nickel, lead
plated tin-lead

No. of Switches	Part Numbers			
	Standard Pitch		Half Pitch	
	Tube Loaded	Tape & Reel	Tube Loaded	Tape & Reel
2	390221-2	2-390221-2	390233-2	2-390233-2
4	390221-4	2-390221-4	390233-4	2-390233-4
6	390221-6	2-390221-6	390233-6	2-390233-6
8	390221-8	2-390221-8	390233-8	2-390233-8