

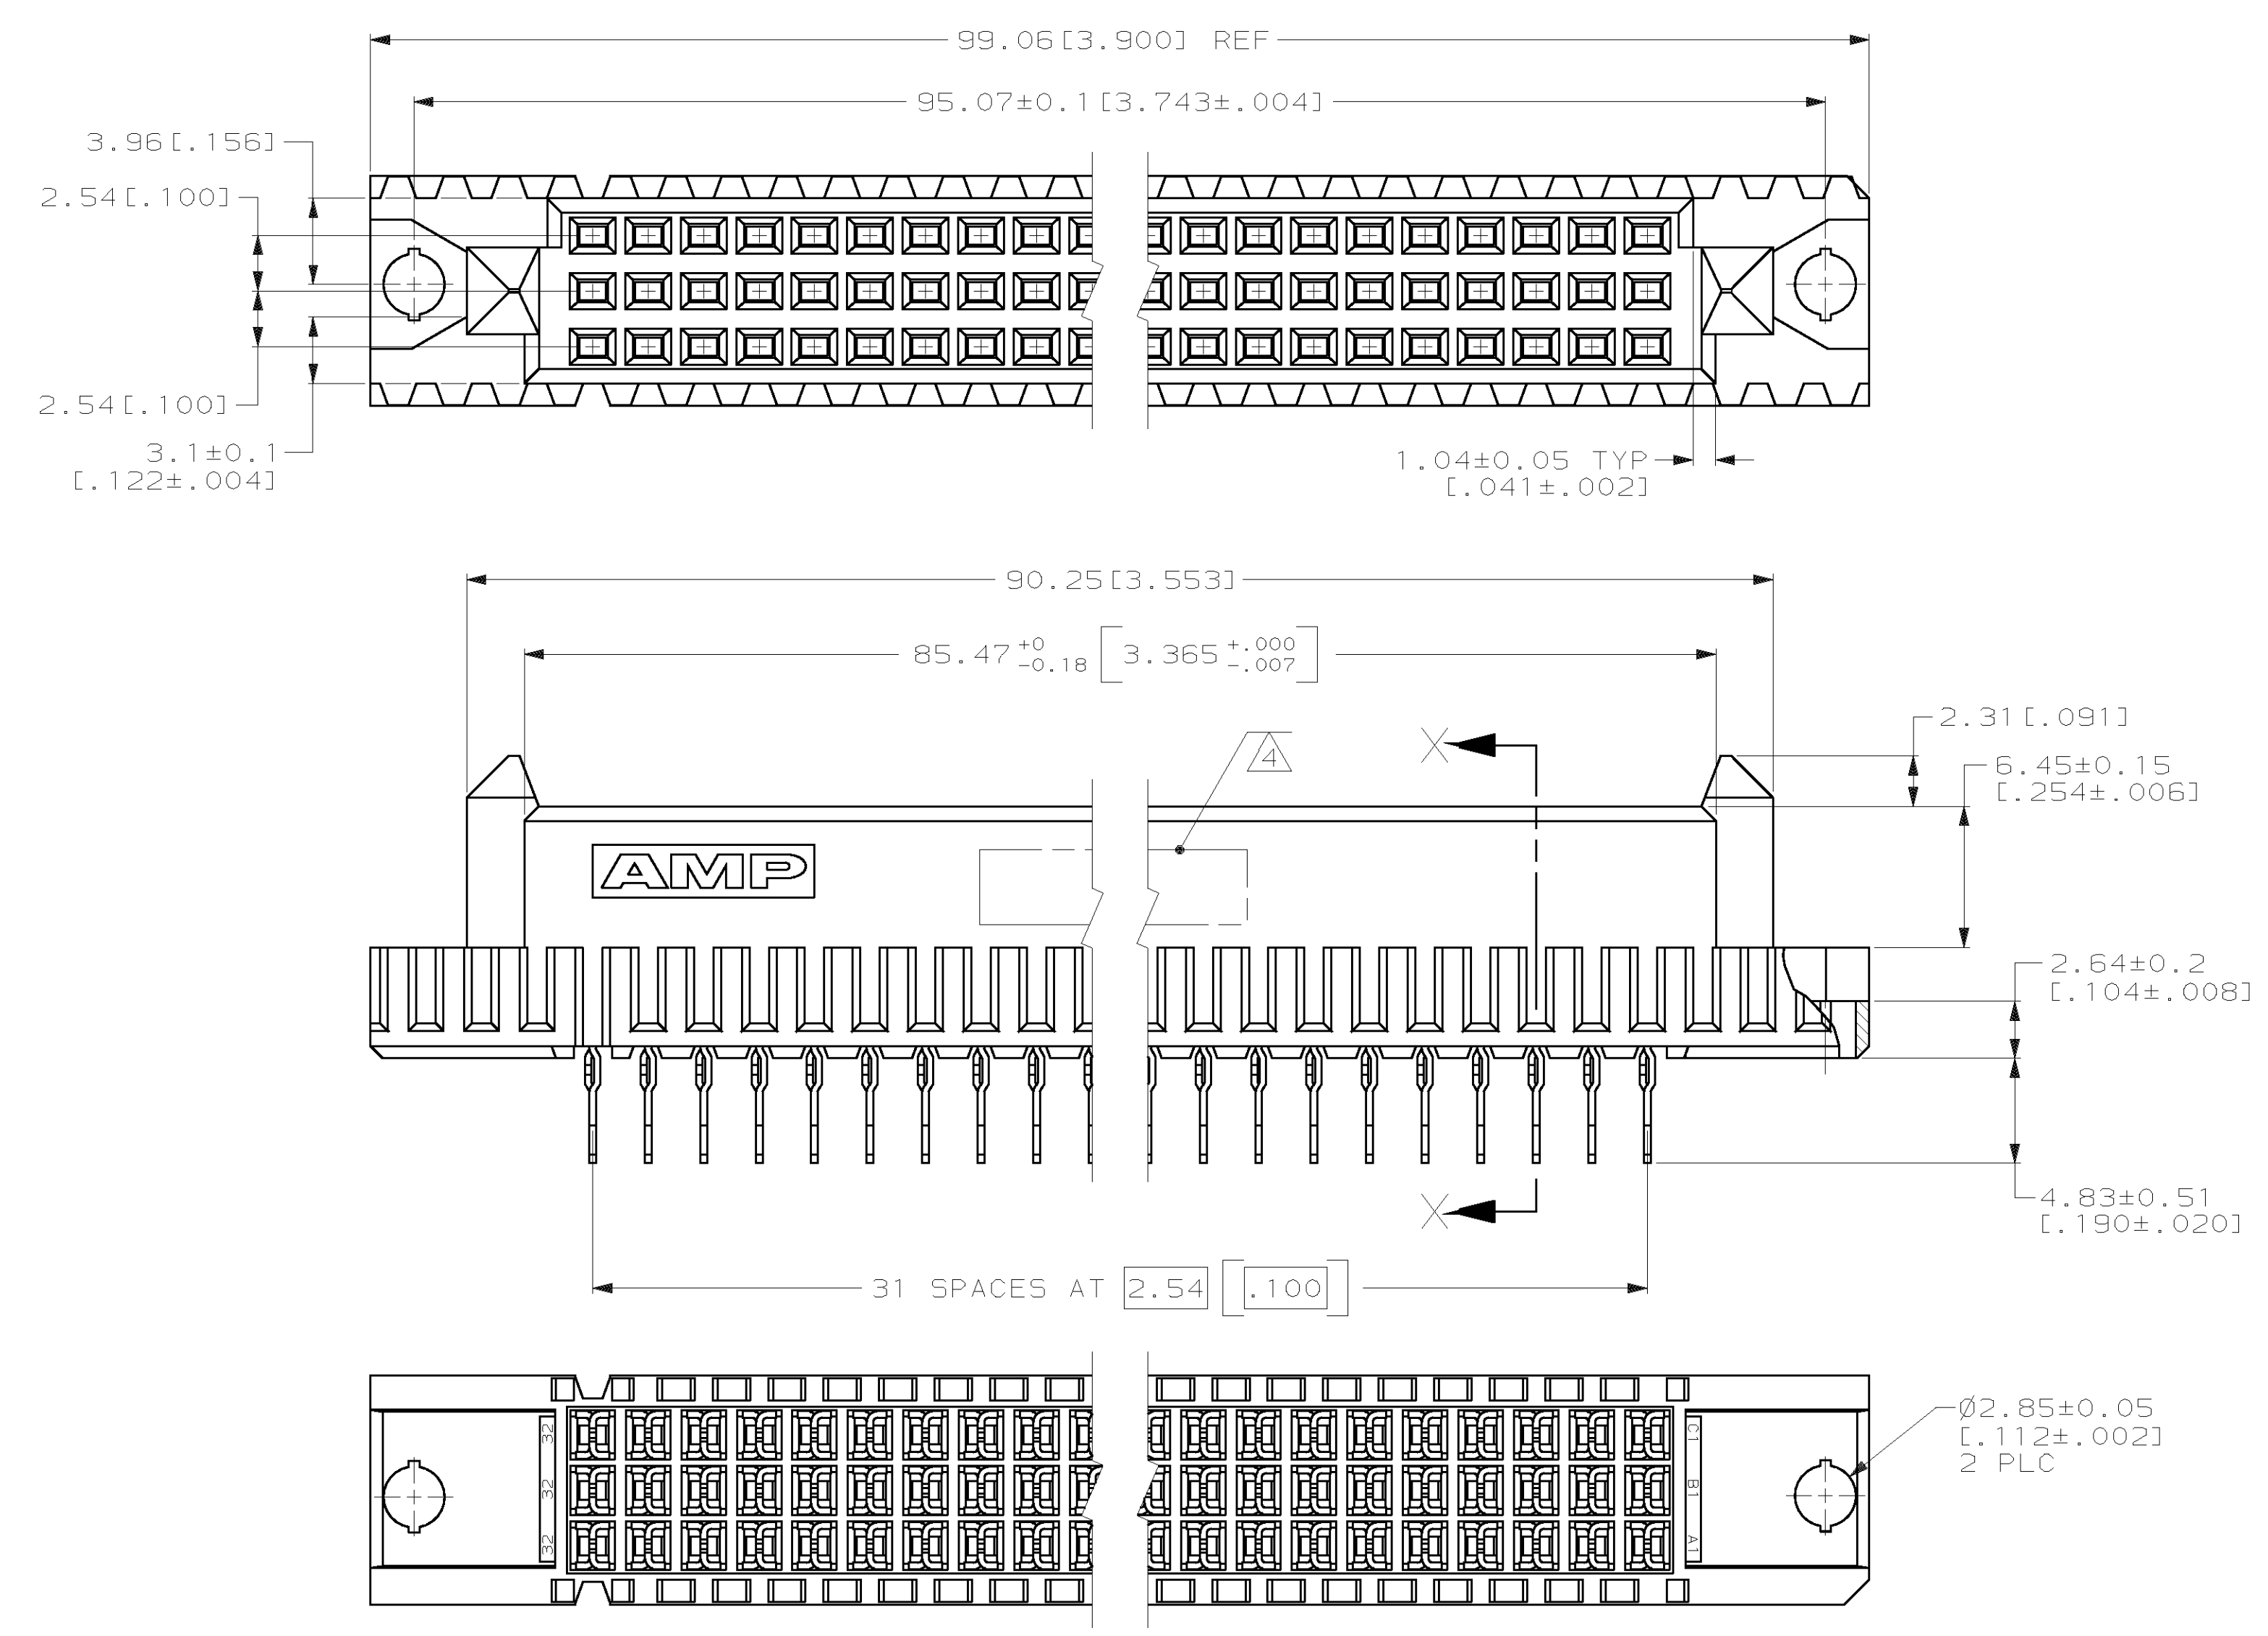


LOC	DIST	P	F	ZONE	LTR	REVISIONS	DATE	APPD
AD	25					0		
						A		
						B		
						C		
						D		

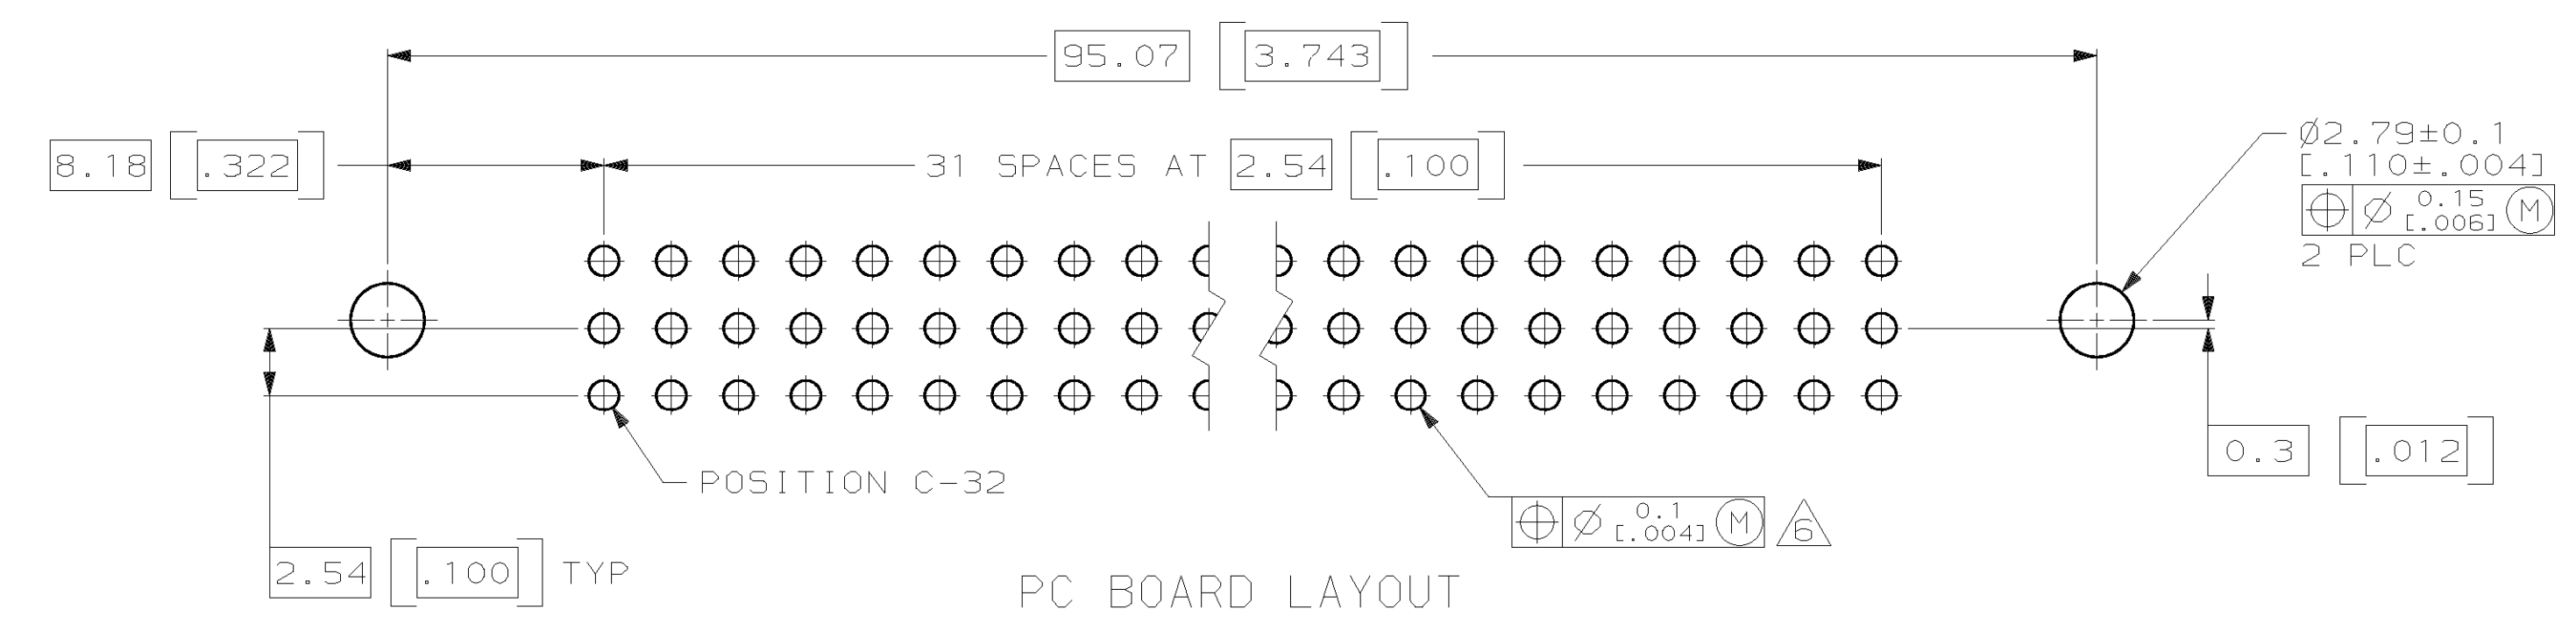

- ① HOUSING MATERIAL: GLASS-FILLED POLYESTER. COLOR: GRAY.
- ② CONTACT MATERIAL: PHOSPHOR BRONZE.
- ③ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN-LEAD ON POSTS.
- ④ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA.
- ⑤ POINT OF MEASUREMENT FOR GOLD.
- ⑥ ACTION PIN POSTS REQUIRE 1.57 [.062] MINIMUM THICK PC BOARD. RECOMMENDED PC BOARD HOLES ARE 1.15±0.02 [.0453±.001] DIAMETER DRILLED HOLE WITH 0.02-0.08 [.001-.003] COPPER AND 0.008 [.0003] MINIMUM TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING, 0.94-1.09 [.037-.043] DIAMETER.

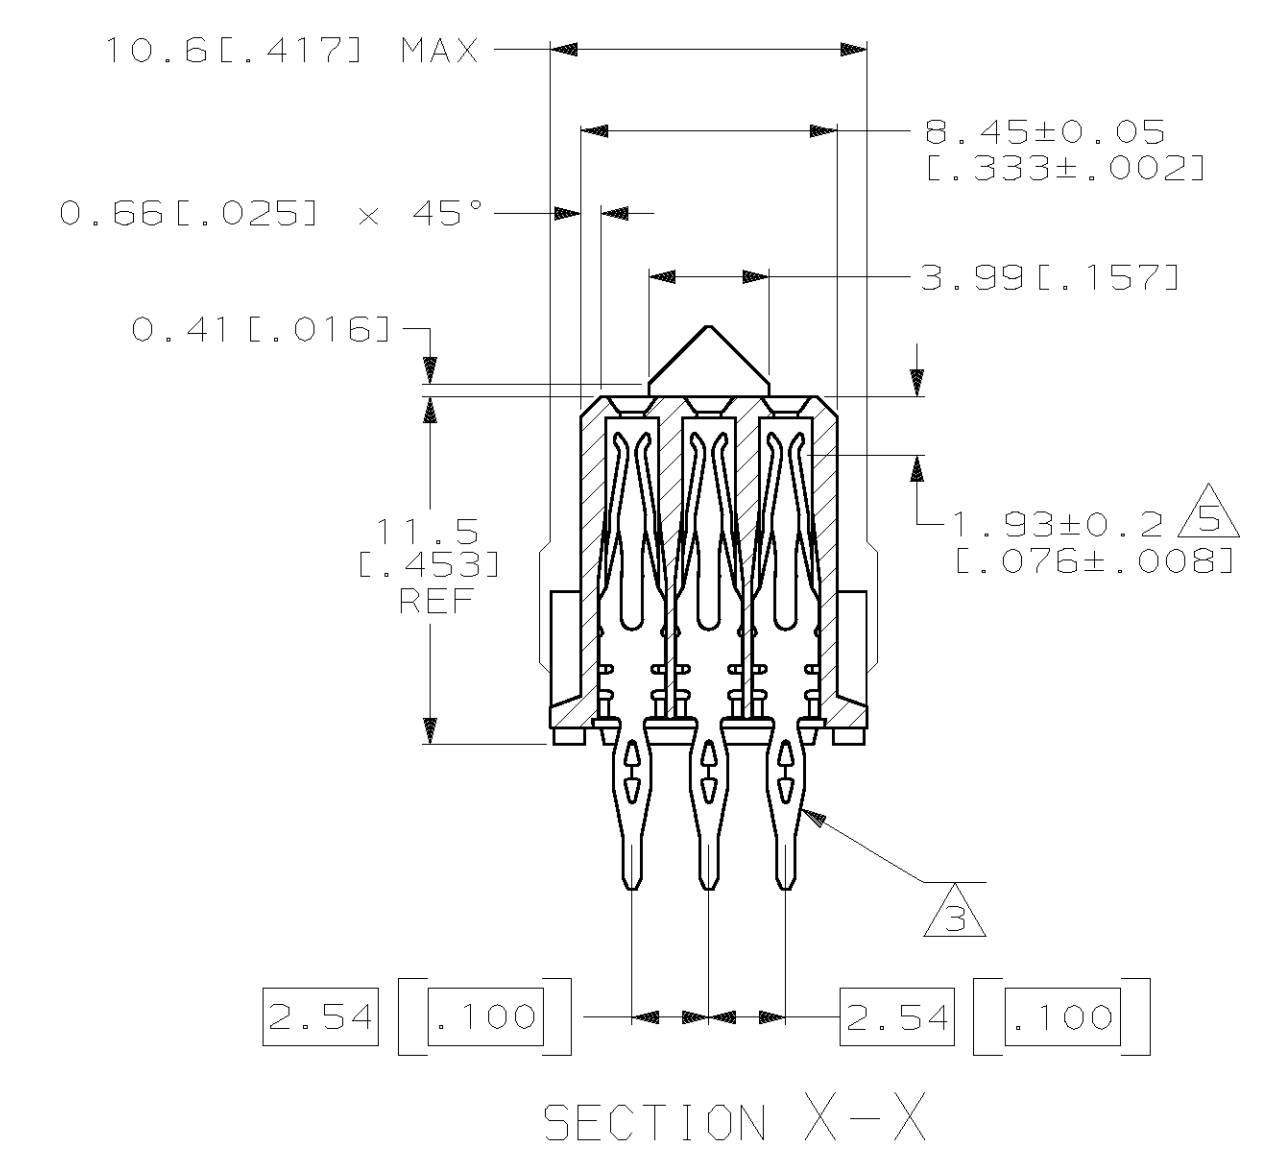

SUPERSEDED BY 536398-5  
 536398-4  
 PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON:	DR L. BRINER 7/25/92	AMP INCORPORATED Harrisburg, Pa. 17105		
1 PLC DEC ± -	CHK R. PATTERSON 7/29/92			
2 PLC DEC ± 0.13 [.005]	APPD R. PATTERSON 7/29/92	NAME RECEPTACLE ASSEMBLY, EUROCARD, TYPE "C" WITH GUIDE FEATURES AND REVERSE POLARIZATION		
ANGLES ± -	APPD D.C. RUBENDALL 7/29/92	DRAWING NO 536398		
MATERIAL HSG ①	PRODUCT SPEC -	SIZE D	FSCM NO 00779	SHEET 1 OF 1
CONT ②	APPLICATION SPEC -	SCALE 4:1		
CONT ③	WEIGHT -			