
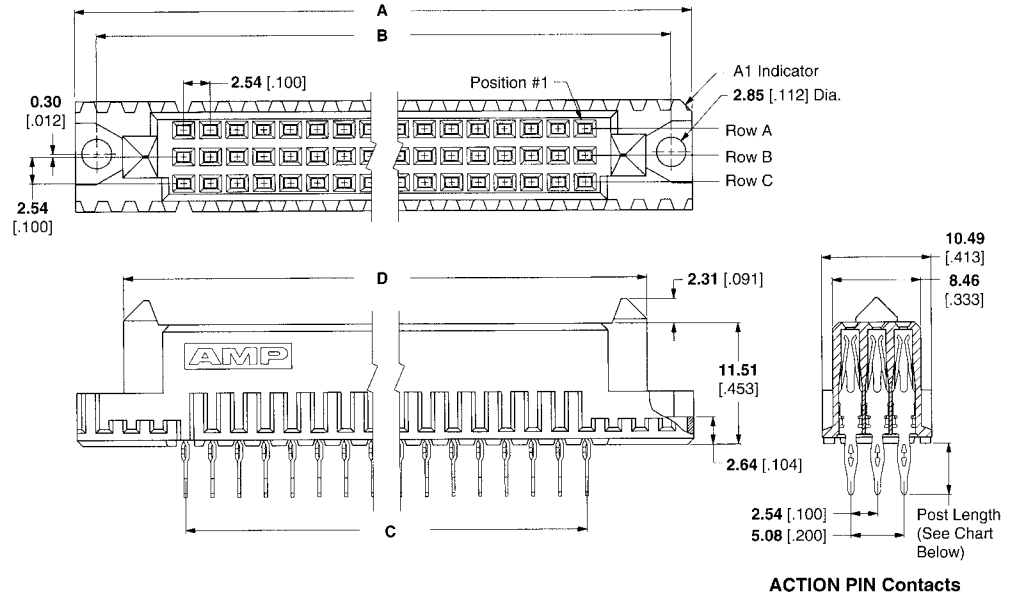


Type C Vertical Receptacle Assemblies with Solder Posts, ACTION PIN Posts (0.30 x 0.61 [.012 x .024]) and Guides

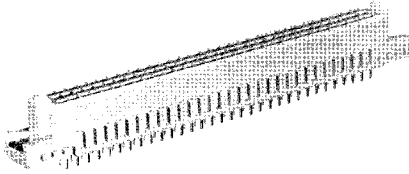

Material

Housing — Glass filled polymer
Contacts — Copper alloy

Related Product Data

- DIN Performance Levels** — Page 6
- Performance Specifications** — Page 7
- Mateable Connectors** — Pages 18
- PC Board Hole Layout** — Page 59
- Accessories** — Pages 64, 67, 68
- ACTION PIN Contacts** — Pages 70, 71
- Application Tooling** — Pages 72, 73
- Technical Documents** — Page 74:
 - DIN Specification 41612
 - IEC Specification 60603-2
 - Application Specification 114-9014
 - Instruction Sheet 408-6784

Standard Size (for PC Board Thicknesses 1.57 [.062] and Above)

Number of Positions	Rows Loaded	Dimensions				DIN Level	Part Number	
		A	B	C	D		Solder Posts 3.30 [.130] Post Length	ACTION PIN Posts 4.83 [.190] Post Length
96	A,B,C	99.06 3.900	95.07 3.743	78.74 3.100	90.27 3.554	II	650998-5	148001-5 536398-51

† Reverse Polarized Housing

Connectors on this page are toolless (flat rock).

Type C Assemblies