



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA, USA.

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
U	-					




A - A




B - B

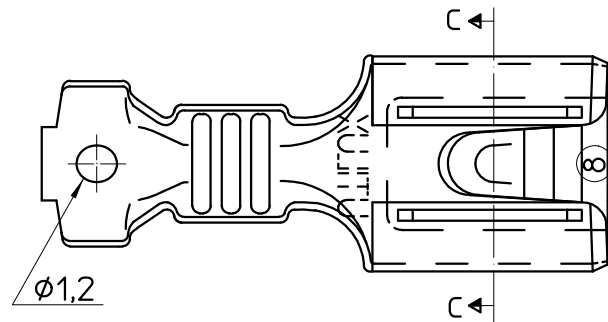

REF. NOTE 3

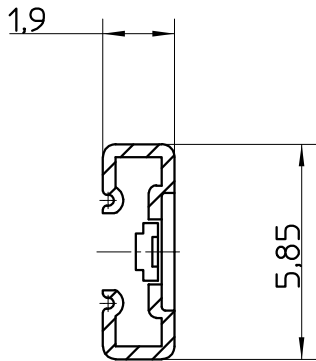


C - C

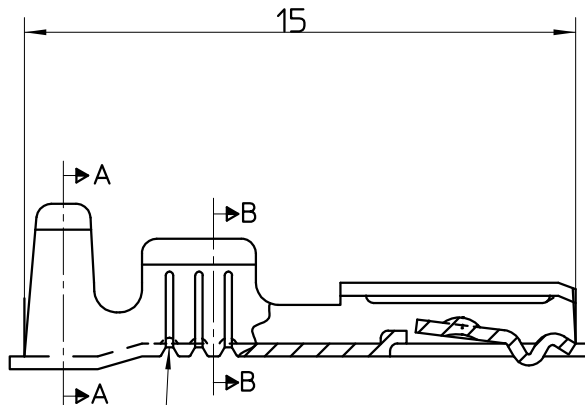

3 INTERNAL RIBS.

NOTES:

- WIRE SIZE RANGE:
CONDUCTOR: 0.5 mm² - 1.0 mm²
INSULATION DIA: 2.0 mm - 3.3 mm
- MAXIMUM CURRENT RATING: 10A
- RECEPTACLE DESIGNED FOR 0.8mm THICK TAB.
NUMERAL '8' STAMPED IN POSITION SHOWN
- FOR CRIMPING DETAILS REFER
TO UTILUX CRIMP CHART NO. H25453

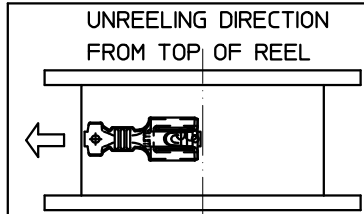

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: W.RIEDE 25.10.04	tyco Tyco Electronics Corporation Electronics AUSTRALIA	
ALL DIMENSIONS IN mm:		CHK: H.THA 25.10.04		
TOLERANCES UNLESS OTHERWISE SPECIFIED: DIMENSION (mm) TOLERANCE(±mm) LESS THAN 10 0.4 OVER 10 TO 30 0.5 OVER 30 TO 80 0.7 OVER 80 TO 250 1.0 ANGLES ±2°		APVD: W.RIEDE 25.10.04	NAME: RECEPTACLE QC 4.8x0.8	
MATERIAL		PRODUCT SPEC:		
FINISH		APPLICATION SPEC:		
		WEIGHT:		
		CUSTOMER DRAWING		SCALE 5:1
		SHEET 1 OF 1		REV 0