THIS DRAWING IS UNPUBLISHED.
VERTRAULICHE UNVEROEFFENTLICHTE ZEICHNUNG
© COPYRIGHT 1998 BY AMP INCORPORATED. ALL RIGHTS RESERVED. ALLE RECHTE VORBEHALTEN

RELEASED FOR PUBLICATION ,2000.
FREI FUER VEROEFFENTLICHUNG

MATED WITH:
PASSEND ZU:
HE

LOC	DIST
AI	–

PROJEKT NR.: –

REVISIONS
AENDERUNGEN

P	LTR	DESCRIPTION BESCHREIBUNG	DATE	DWN	APVD
	E1	text for packaging corrected ECR-08-001868	23.01.08	SR	ST

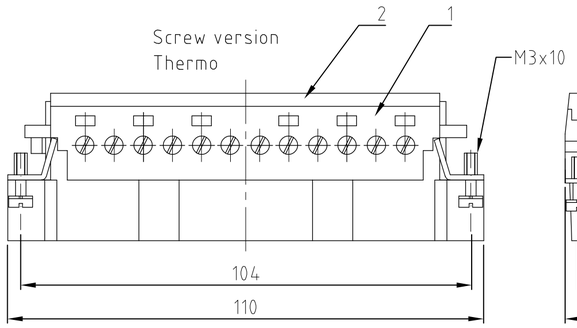



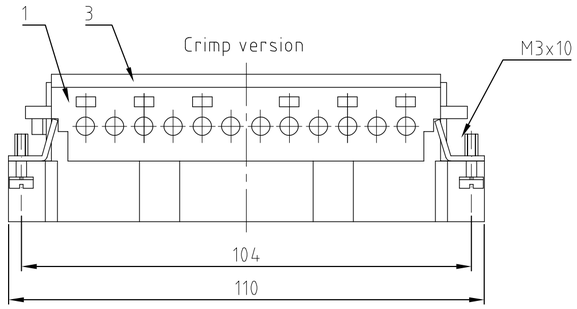

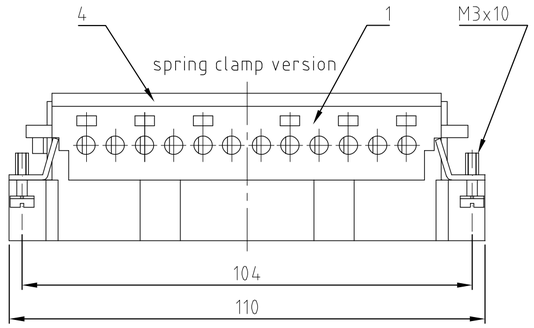

assembly directions



× distance for a safe contact max: max: 21 mm

Contact arrangement view from termination side

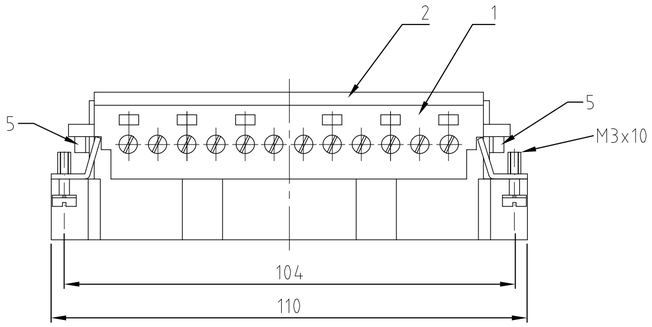

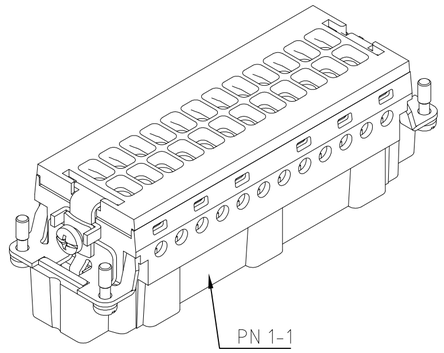

Printing 1-24 Thermo

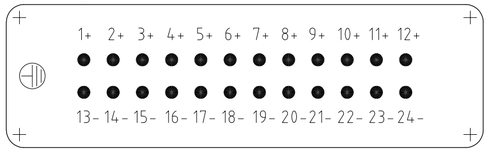

Printing 1-24 Screw

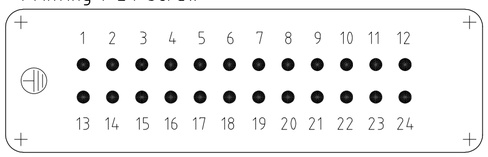

Panel cut-out for contact insert when used without housing

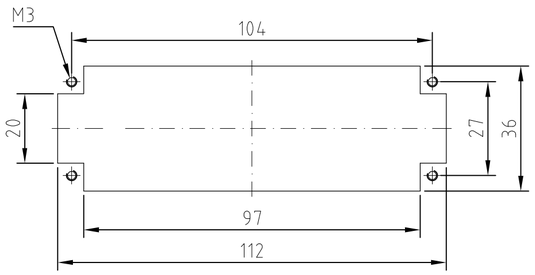

Printing 25-48 Screw

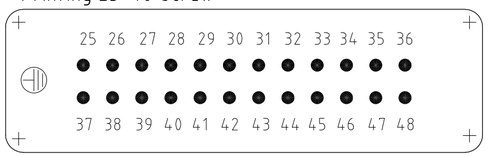

Printing 12+6+6 Screw/Thermo

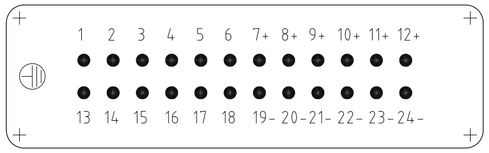

NOTES:

1. SUITABLE CRIMP CONTACTS: SERIES HE/HA
   OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM
2. SUITABLE HOOD SIZE 8; 12: SERIES HB; HD; HIP; EMV
   SUITABLE INSERTION AND EXTRACTION TOOL:
   SCREWDRIVER 0,5x3 DIN 5264
3. Strip lenght: Screw conection 10mm
   Spring clamp conection 10mm Crimp conection 7.5mm
4. STANDARDS:
   DIN EN 61984; DIN EN 60664-1

5. PACKAGING:
   5 SETS IN A CARTON, PRE-MOUNTED

6. SPECIAL PACKAGING: Krauss-Maffei
   PACKAGING UNIT: 220 PIECES

1-2	0-1	9-3	1-8	9-5	9-4	7-9	7-1	2-9	2-3	1-9	1-7	1-1	DESCRIPTION	MATERIAL	COLOR / FARBE	ITEM NO. POS.	NOTES
2													cylinder screw	steel	blue	5	M4x6
		1				1	1						cover spring clamp version		light grey	4	
								1	1				cover crimp version		light grey	3	
1	1		1	1	1					1	1	1	cover screw version		light grey	2	
1	1	1	1	1	1	1	1	1	1	1	1	1	pin insert		light grey	1	
HE.24.Sti.S.B1-24+2ES	HE.24.Sti.S.B1-24.KM	HE.24.Sti.SC-AU.B1-24	HE.24.Sti.S.B-T 12+6+6	HE.24.Sti.S-AU.B1-24	HE.24.Sti.S-AU.B25-48	HE.24.Sti.SC.B25-48	HE.24.Sti.SC.B1-24	HE.24.Sti.C.B25-48	HE.24.Sti.C.B1-24	HE.24.Sti.S.B25-48	HE.24.Sti.S-T.B1-24	HE.24.Sti.S.B1-24					

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.
DIESES ZEICHNUNGSDOKUMENT WIRD DURCH AMP INCORPORATED KONTROLLIERT. AENDERUNGEN, DIE DEM TECHNISCHEN FORTSCHRITT DIENEN, SIND VORBEHALTEN. DEN JEWEILS LETZTGUELTIGEN AENDERUNGSSTAND ERFAHREN SIE AUF ANFRAGE.

DIMENSIONS: DIMENSIONEN: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN
n. ISO 8015
n. ISO 2768 – mH –E
n. DIN 16901 – 140
0 PLC #
1 PLC #
2 PLC #
3 PLC #
ANGLES / WINKEL #

MATERIAL

FINISH / OBERFLAECHE/FARBE

DWN Schneider 08.02.2000
CHK Schweiger 08.02.2000
APVD –
PRODUCT SPEC PRODUKTSPEZ. –
APPLICATION SPEC VERABEITUNGSSPEZ. –
WEIGHT GEWICHT –

AMP
HTS Elektrotechnik
53819 Neunkirchen, Germany

NAME
Male insert
HE.24.STI.S/C

SIZE A2
CAGE CODE 00779
DRAWING NO ZEICHNUNGS-NR. C- 1103640
RESTRICTED TO NUR FUER –

CUSTOMER DRAWING /KUNDENZEICHNUNG
SCALE MASSSTAB 1 : 1
SHEET BLATT 1 OF VON 1
REV E1

AMP 1471-9 REV 27JUN96
This is a TRANSLATED file from Computervision, Inc., Medusa Revision 12.2.5T