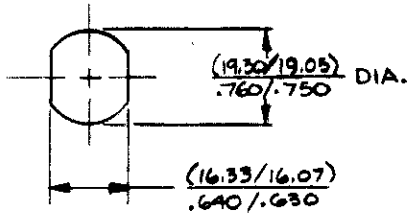

PANEL CUTOUT

SPECIFICATIONS:

CONTACT RATING:
- SILVER - 3A @ 125 VAC OR 28 VDC (RESISTIVE)
- GOLD PLATING - 0.4 VA MAX @ 20 VDC OR PEAK AC

CONTACT RESISTANCE:
- SILVER - 10 MILLIOHMS MAX.
- GOLD PLATING - 20 MILLIOHMS MAX.

INSULATION RESISTANCE:
- SILVER - 1,000 MEGOHMS MIN.
- GOLD PLATING - 1,000 MEGOHMS MIN. @ 500 VDC

DIELECTRIC STRENGTH: 1,000 VOLTS RMS @ SEA LEVEL

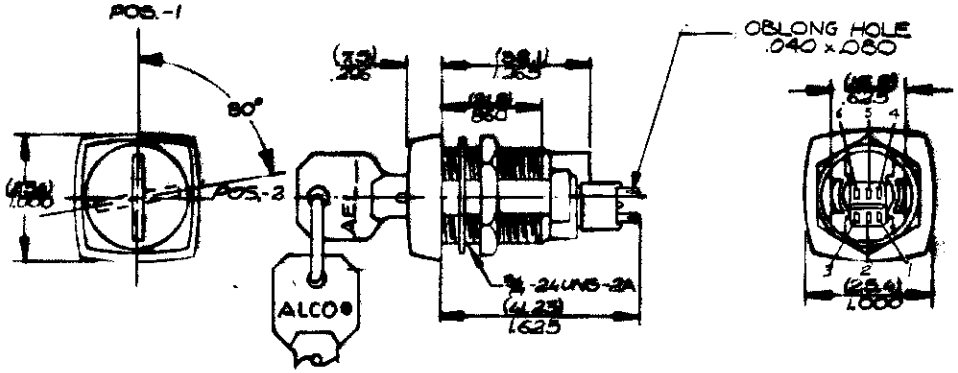

SKT-33-GG	POSITION 1 AND 2	GOLD OVER NICKEL	2 TO 1 5 TO 4	2 TO 3 5 TO 6
SKT-33-1G	POSITION 1 ONLY	GOLD OVER NICKEL	2 TO 1 5 TO 4	2 TO 3 5 TO 6
SKT-33-2	POSITION 1 AND 2	SOLID SILVER	2 TO 1 5 TO 4	2 TO 3 5 TO 6
SKT-33-1	POSITION 1 ONLY	SOLID SILVER	2 TO 1 5 TO 4	2 TO 3 5 TO 6
MODEL NO. (*)	REMOVE KEY IN:	SWITCH CONTACTS	POS. 1	POS 2
			TERMINALS CONNECTED WHEN KEY IS IN:	

TERMINAL DESIGNATION NUMBERS ARE FOR REFERENCE ONLY, AND DO NOT APPEAR ON SWITCHES

(MM)/INCH (2) REFERENCE: 80984 (HEX NUT)

REV.	DESCRIPTION	DATE
2	ECO 4195 MM 1-10-92 CF	1/14/92
B	ECO # 2024	7/24/85
A	ECO # 1603 E.R.	10/17/78

TOLERANCES UNLESS NOTED: ±.010 INCH ±0.25 MM ± 5° ANGLE
DRAWN B. BUCKHOLT 5/6/81
CHECKED
APPROVED R. Daniel 5/7/81

DIMENSIONS IN — DO NOT SCALE DRAWING
MATERIAL —"—
FINISH
SCALE 1/1

ALCO® ELECTRONIC PRODUCTS, INC. North Andover, Massachusetts 01845

TITLE KEYLOCK SWITCH SKT-33-(*) SERIES

DWG. NO. 40063 — SHEET OF — REV. 2

Property of Tyco Electronics Corporation, May 21 2003
CUSTOMER DRWG: 1437598-9 REV: A PG 1 OF 1