


REV. 2 11/21/97

COIL:	
RESISTANCE	1560 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	17.0 VDC
MUST RELEASE	

ENVIRONMENT:	
VIBRATION	10 CPS TO 500 CPS @ 10 g's
SHOCK	30 g's 6 MS. DURATION
TEMPERATURE	-55 °C TO +85 °C

NOTES: OPERATE TIME 4.0 MS MAX
 RELEASE TIME 3.0 MS MAX

CUSTOMER DATA SHEET

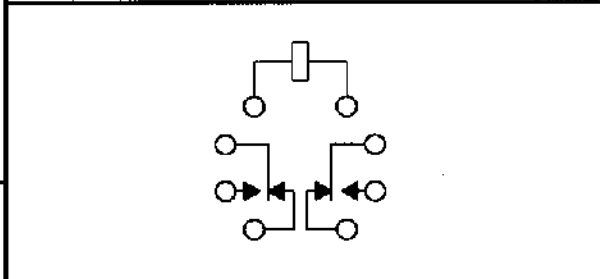

CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/18/90 CK 4/2/97



CUST. C. I. I. STD.
 CUST. NO.

TYPE "HM" RELAY

HM-26A