


REV. 1 5/21/98

COIL: @ +25 ° C
 RESISTANCE 160 OHMS ± 10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 7.2 VDC
 MUST RELEASE _____

ENVIRONMENT:
 VIBRATION 10 CPS TO 500 CPS @ 10 g's
 SHOCK 30 g's 6 ± 1 MS. DURATION
 TEMPERATURE -55 °C TO +85 °C

NOTES: OPERATE & RELEASE 6 MS MAX.
DIELECTRIC 500 VAC (350 VAC OPEN CONTACTS)

CUSTOMER DATA SHEET

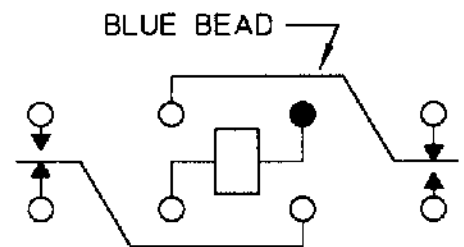

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/14/98 CK. *5/18/98*

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I. STD.
 CUST. NO. _____

TYPE "HFC" RELAY

HFC1201G00