


COIL: 26.5 VDC	
WINDING #1	WINDING #2
1000 OHMS ± 10% @ 25° C	1000 OHMS ± 10% @ 25° C
13.0 VDC MUST OPERATE	13.0 VDC MUST OPERATE
26.5 VDC NOMINAL VOLTAGE	26.5 VDC NOMINAL VOLTAGE

CUSTOMER DATA SHEET

LAST ENERG. →

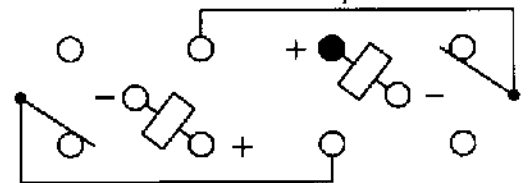

CONTACT RATING: LOW LEVEL TO 2 AMPS
28 VDC RESISTIVE 100,000 OPERATIONS

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OTHER SPECIFICATIONS IN ACCORDANCE
WITH MIL-R-39016/45

OPERATE TIME 5 MS MAX

STABILIZATION TIME 2.5 MS MAX

DR. R.B. 10/1/96 CK *AMS 10/1/96*

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. COMMERCIAL
CUST. NO. REF. M39016/45-021M

TYPE "LS" RELAY

LS-9521M