


REV. 1 9/14/94

COIL: 6.0 VDC	
WINDING #1	WINDING #2
254 OHMS ± 10% @ 25° C	254 OHMS ± 10% @ 25° C
3.25 VDC MUST OPERATE	3.25 VDC MUST OPERATE

CUSTOMER DATA SHEET

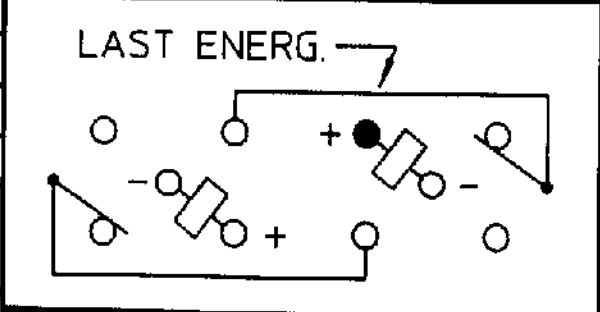

ENVIRONMENT:
 VIBRATION 10 CPS TO 2500 CPS @ 30 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 5 MS MAX.
CONTACT BOUNCE 2.0 MS MAX.
OTHER SPECIFICATIONS IN ACCORDANCE WITH
MIL-R-39016/45

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/23/94 CK. 9/14/94

COMMUNICATIONS INSTRUMENTS, INC.

CUST. COMMERCIAL
 CUST. NO. M39016/45-008L TYPE "LS" RELAY

LS-9508L