

COIL: 26.5 VDC NOMINAL VOLTAGE

CUSTOMER DATA SHEET

WINDING #1

WINDING #2

254 OHMS ± 10% @ 25° C

254 OHMS ± 10% @ 25° C

13.0 VDC MUST SET MAX.

13.0 VDC MUST SET MAX.

8.8 VDC MUST SET MIN.

8.8 VDC MUST SET MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C


NOTES: OPERATE TIME 5 MS MAX

CONTACT STABILIZATION 2.5 MS MAX

OTHER SPECIFICATIONS IN ACCORDANCE

WITH MIL-R-39016/45-022M

LAST ENERG.

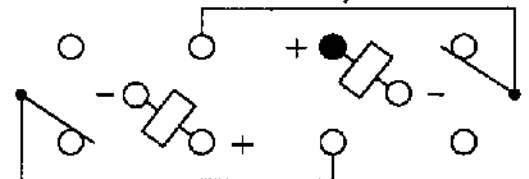

CONTACT RATING: LOW LEVEL TO 2 AMPS
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/4/98

CK.



COMMUNICATIONS
INSTRUMENTS, INC.

CUST. COMMERCIAL

CUST. NO. M39016/45-022M

TYPE "LS" RELAY

LS-9522M