



①  
(TELEDYNE IS  
.750 MIN.)

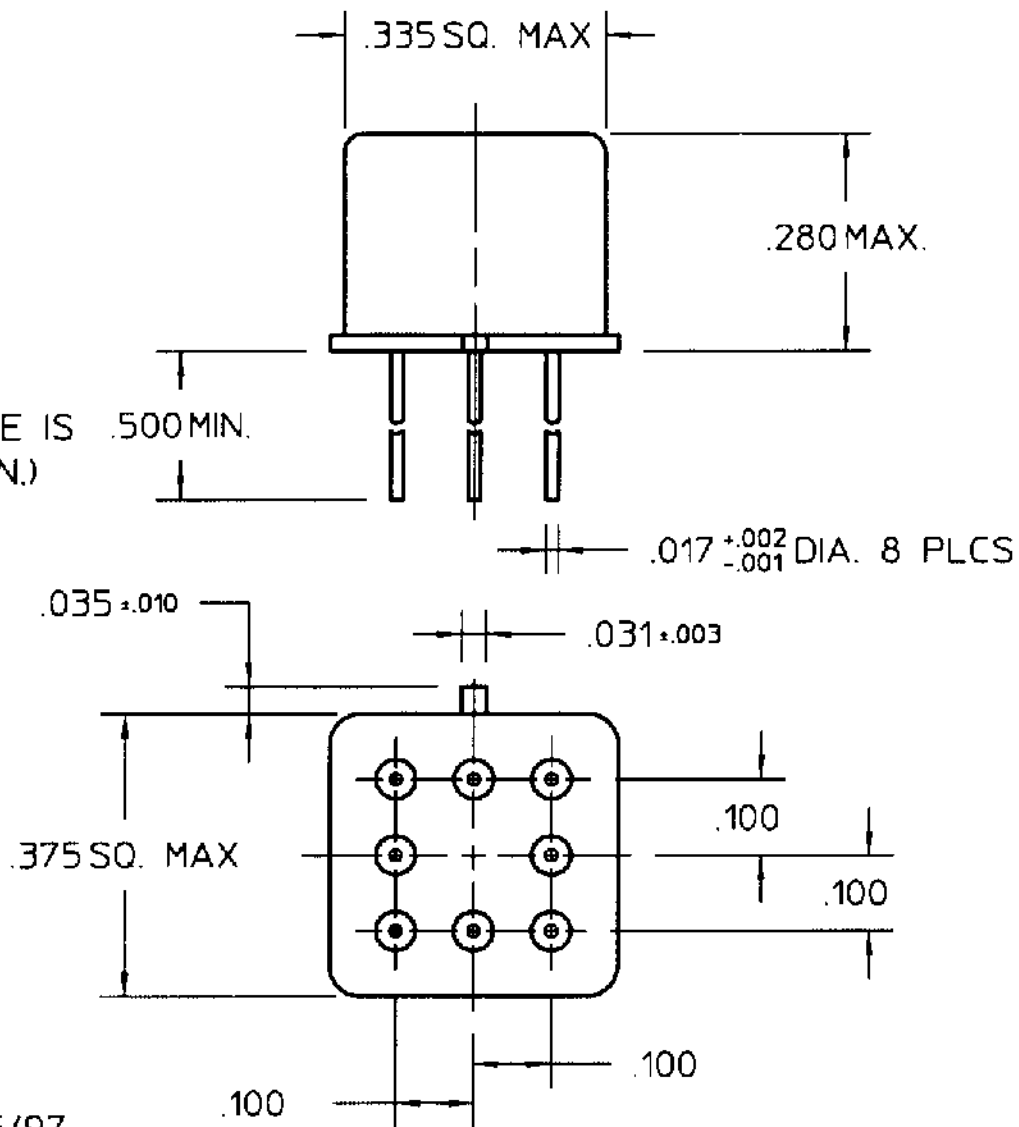

REV. 1 6/5/97

|                 |                            |
|-----------------|----------------------------|
| COIL: @ 25°C    |                            |
| RESISTANCE      | 1560 OHMS ± 10%            |
| NOMINAL VOLTAGE | 26.5 VDC                   |
| MUST OPERATE    | 14.2 VDC                   |
| MUST RELEASE    | 8.0 VDC MAX, 1.37 VDC MIN. |

CUSTOMER DATA SHEET



|              |                             |
|--------------|-----------------------------|
| ENVIRONMENT: |                             |
| VIBRATION    | 10 CPS TO 3000 CPS @ 30 g's |
| SHOCK        | 75 g's 6 MS. DURATION       |
| TEMPERATURE  | -65 °C TO +125 °C           |

CONTACT RATING: LOW LEVEL TO 1 AMP  
28 VDC RESISTIVE 100,000 OPERATIONS MIN.

|        |                           |
|--------|---------------------------|
| NOTES: | OPERATE TIME 2.0 MS MAX   |
|        | RELEASE TIME 4.0 MS MAX   |
|        | CONTACT BOUNCE 1.5 MS MAX |

DR. R.B. 4/11/97 CK. 6/5/97



CUST. TELEDYNE  
CUST. NO. ER114D-26A

TYPE PRMGAD RELAY

PRMGACD-26X