

COIL: @ 25°C

CUSTOMER DATA SHEET

WINDING #1

WINDING #2

63 OHMS ± 10% @ 25° C

63 OHMS ± 10% @ 25° C

3.25 VDC MUST OPERATE

3.25 VDC MUST OPERATE

6 VDC NOMINAL VOLTAGE

6 VDC NOMINAL VOLTAGE

ENVIRONMENT:


VIBRATION 10 CPS TO 2500 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OTHER SPECIFICATIONS IN ACCORDANCE WITH MIL-R-39016/45

LAST ENERG. →

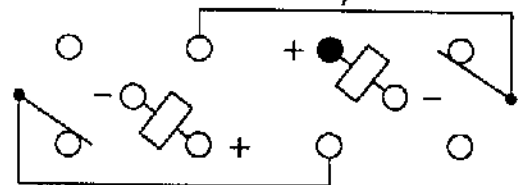

CONTACT RATING: 2 AMPS 30 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/5/96

CK. 3/12/06

COMMUNICATIONS INSTRUMENTS, INC.

CUST. COMM. EQUIVALENT
CUST. NO. M39016/45-01L

TYPE 'LS' RELAY

LS-9511L