

COIL: 12.0 VDC

WINDING #1

254 OHMS ± 10% @ 25° C

6.5 VDC MUST OPERATE

WINDING #2

254 OHMS ± 10% @ 25° C

6.5 VDC MUST OPERATE

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 5 MS MAX

CONTACT BOUNCE 2.0 MS MAX

OTHER SPECIFICATIONS IN ACCORDANCE


WITH MIL-R-39016/45

CUST. COMMERCIAL
CUST. NO. M39016/45-015L

TYPE "LS" RELAY

CUSTOMER DATA SHEET

LAST ENERG.

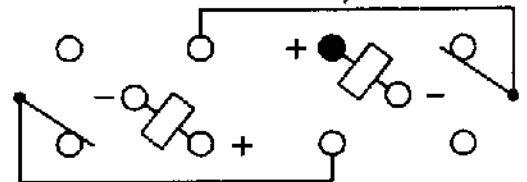

CONTACT RATING: LOW LEVEL TO 2 AMPS
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 12/19/94 CK. AW 12-19-94

COMMUNICATIONS
INSTRUMENTS, INC.

LS-9515L