


COIL: 26.5 VDC	
WINDING #1	WINDING #2
1000 OHMS ± 10% @ 25° C	1000 OHMS ± 10% @ 25° C
13.0 VDC MUST OPERATE	13.0 VDC MUST OPERATE
26.5 VDC NOMINAL VOLTAGE	26.5 VDC NOMINAL VOLTAGE

CUSTOMER DATA SHEET

LAST ENERG.

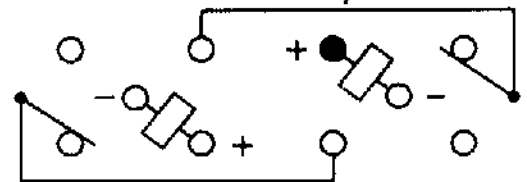

CONTACT RATING: LOW LEVEL TO 2 AMPS
28 VDC RESISTIVE 100,000 OPERATIONS

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OTHER SPECIFICATIONS IN ACCORDANCE
WITH MIL-R-39016/45

DR. R.B. 8/10/94 CK. JAW 8-10-94

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. COMMERCIAL
 CUST. NO. M39016/45-019L

TYPE "LS" RELAY

LS-9519L