


COIL: 26.5 VDC	
WINDING #1	WINDING #2
1000 OHMS ± 10% @ 25° C	1000 OHMS ± 10% @ 25° C
13.0 VDC MUST OPERATE	13.0 VDC MUST OPERATE
26.5 VDC NOMINAL VOLTAGE	26.5 VDC NOMINAL VOLTAGE

### CUSTOMER DATA SHEET

LAST ENERG. →

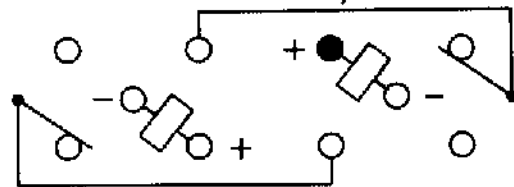

CONTACT RATING: LOW LEVEL TO 2 AMPS  
28 VDC RESISTIVE 100,000 OPERATIONS

#### ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OTHER SPECIFICATIONS IN ACCORDANCE  
WITH MIL-R-39016/45

DR. R.B. 11/8/94 CK. *JAW 11-8-94*

 COMMUNICATIONS  
INSTRUMENTS, INC.

CUST. COMMERCIAL  
 CUST. NO. M39016/45-019M

TYPE "LS" RELAY

LS-9519M