


REV. 0
DCO 17644

COIL: @ 25°C	
RESISTANCE	1000 OHMS ±10%
NOMINAL VOLTAGE	12.6 VDC
MUST OPERATE	6.5 mADC
MUST RELEASE	

ENVIRONMENT:	
VIBRATION	10 Hz TO 2000 Hz @ 15 g's
SHOCK	50 g's 11±1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE TIME 15 MS MAX
	RELEASE 10 MS MAX
	CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

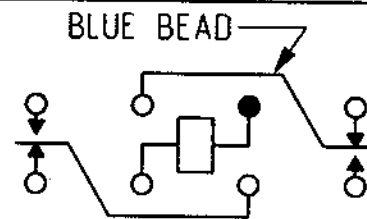

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL - 2A
	@ 28 VDC RESISTIVE -5A @ 115 VAC
	RESISTIVE 100,000 OPERATIONS

DR. ASB 7 NOV 02 CK. 11/7/02 4/3

CII Technologies
advanced control electronic solutions

CUST. CII STD
CUST. NO. REV.

"SF" RELAY

SF6101F00