


REV. 0
DCO 143875

| | |
|----------------------|-----------------------------|
| COIL: @ 25°C | |
| RESISTANCE | 125 OHMS ±10% |
| NOMINAL VOLTAGE | 5.0 VDC |
| MUST OPERATE | 2.6 VDC |
| TURN-ON BASE CURRENT | 0.28 mADC |
| MUST RELEASE | 1.4 VDC MAX., 0.22 VDC MIN. |

| | |
|--------------|---------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 Hz TO 3000 Hz @ 30 g's |
| SHOCK | 75 g's 6 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

| | |
|--------|--|
| NOTES: | TURN-ON TIME 3.5 MS MAX. |
| | TURN-OFF TIME 7.5 MS MAX. |
| | CONTACT STABILIZATION TIME 2.0 MS MAX. |

CUSTOMER DATA SHEET

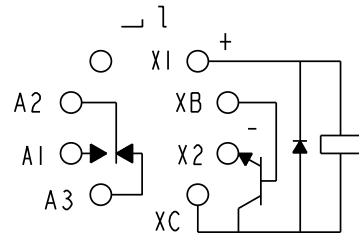

TERMINAL VIEW

| | |
|-----------------|-------------------------------------|
| CONTACT RATING: | LOW LEVEL TO 1A |
| | 28 VDC RESISTIVE 100,000 OPERATIONS |

DR. B.D. 28APR04 CK. JERRY C. 4/28/04



CUST. CII
CUST. NO. STANDARD REV.

"1MST" RELAY

1MSPT-5W