


REV. 0
DCO 143875

COIL: @ 25°C
 RESISTANCE 125 OHMS ±10%
 NOMINAL VOLTAGE 5.0 VDC
 MUST OPERATE 2.6 VDC
TURN-ON BASE CURRENT 0.28 mADC
 MUST RELEASE 1.4 VDC MAX., 0.22 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 Hz TO 3000 Hz @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 3.5 MS MAX.
TURN-OFF TIME 7.5 MS MAX.
CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET

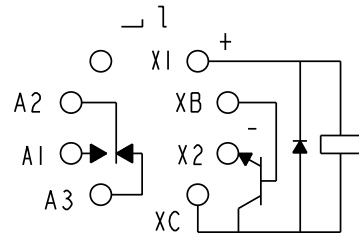

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 28APR04 CK. JERRY C. 4/28/04

CII Technologies™
 advanced control electronic solutions

CUST. CII
 CUST. NO. STANDARD REV. _____

"1MST" RELAY

1MSPT-5W