


Contact and Welding Tab Terminals (Continued)

Miscellaneous Contacts and Weld Tabs

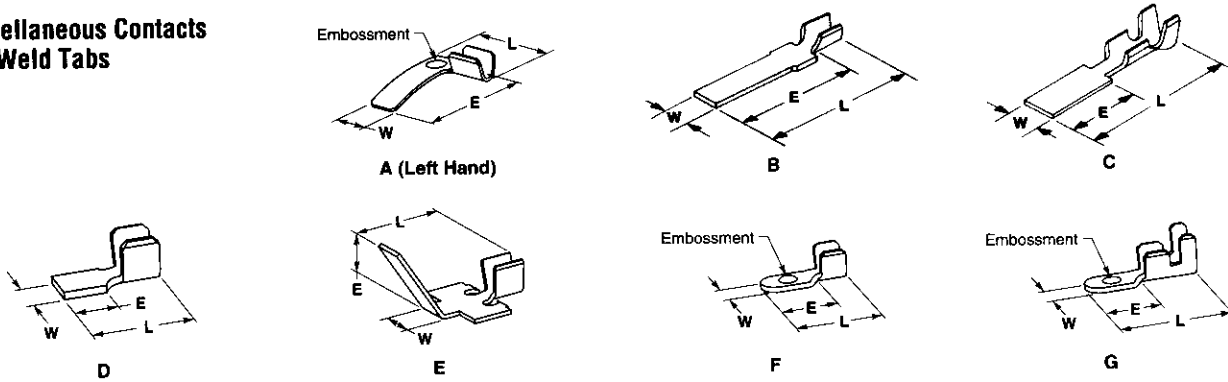

Type	Wire Range		Insul. Dia.	Stock Thickness	Dimensions			Tab Direction	Material	Part Number
	AWG	mm ²			W	L	E			
A	18-14	0.8-2.0	—	.020 0.51	.155 3.94	.340 8.64	.390 9.91	L.H.	Phosphor Bronze	42920-3 ⁴
					R.H.	Phosphor Bronze	42920-4 ⁴			
B	22-18	0.3-0.9	—	.016 0.41	.140 3.56	.740 18.80	.615 15.62	—	Brass	155386-11. ⁶
					Tin Plated Brass	155386-21. ⁶				
					Brass	155386-31. ⁷				
C	24-22	0.2-0.4	—	.008 0.20	.115 2.92	.600 15.24	.470 11.94	—	Stainless Steel	62827-1
					Nickel Plated Steel	62062-1				
D	26-22	0.12-0.40	.055-.080 1.40-2.03	.012 0.30	.090 2.29	.365 9.27	.100 2.54	—	Stainless Steel	61263-1
					.008 0.20	.115 2.92	.685 17.40	.375 9.53	—	Stainless Steel
D	18-14	0.8-2.0	—	.016 0.41	.140 3.56	.350 8.90	.210 5.33	—	Nickel Plated Steel	62134-2
E	18-14	0.8-2.0	—	.016 0.41	.140 3.56	.540 13.72	.345 8.76	—	Brass	42349-12
F	20-16	0.5-1.4	—	.020 0.51	.125 3.18	.270 6.86	.175 4.45	—	Tin Plated Steel	62153-1 ³
								Nickel Plated Steel	63701-1 ⁴	
								Tin Plated Steel	40990-1 ⁴	
G	20-16	0.5-1.4	.090-.130 2.29-3.30	.020 0.51	.125 3.18	.365 9.27	.165 4.19	—	Gold Plated Steel	40990-2 ⁵
								Tin Plated Steel	60581-1 ⁵	
								Tin Plated Steel	1217510-1 ³	

- 1 .062 [1.57] diameter hole in tab.
- 2 Tab bent up 60° in applicator.
- 3 Tab embossment up.
- 4 Tab embossment down.
- 5 No tab embossment.
- 6 Standard applicator reeling.
- 7 Mini applicator reeling.

Contact and Welding
Tab Terminals