


DO NOT SCALE
DIMENSIONS IN mm


METRIC

THIRD ANGLE
PROJECTION



NOTE:

- 1 RANGE: $\phi 24$ MAX.
- 2 MIN. TENSILE STRENGTH 200N.
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

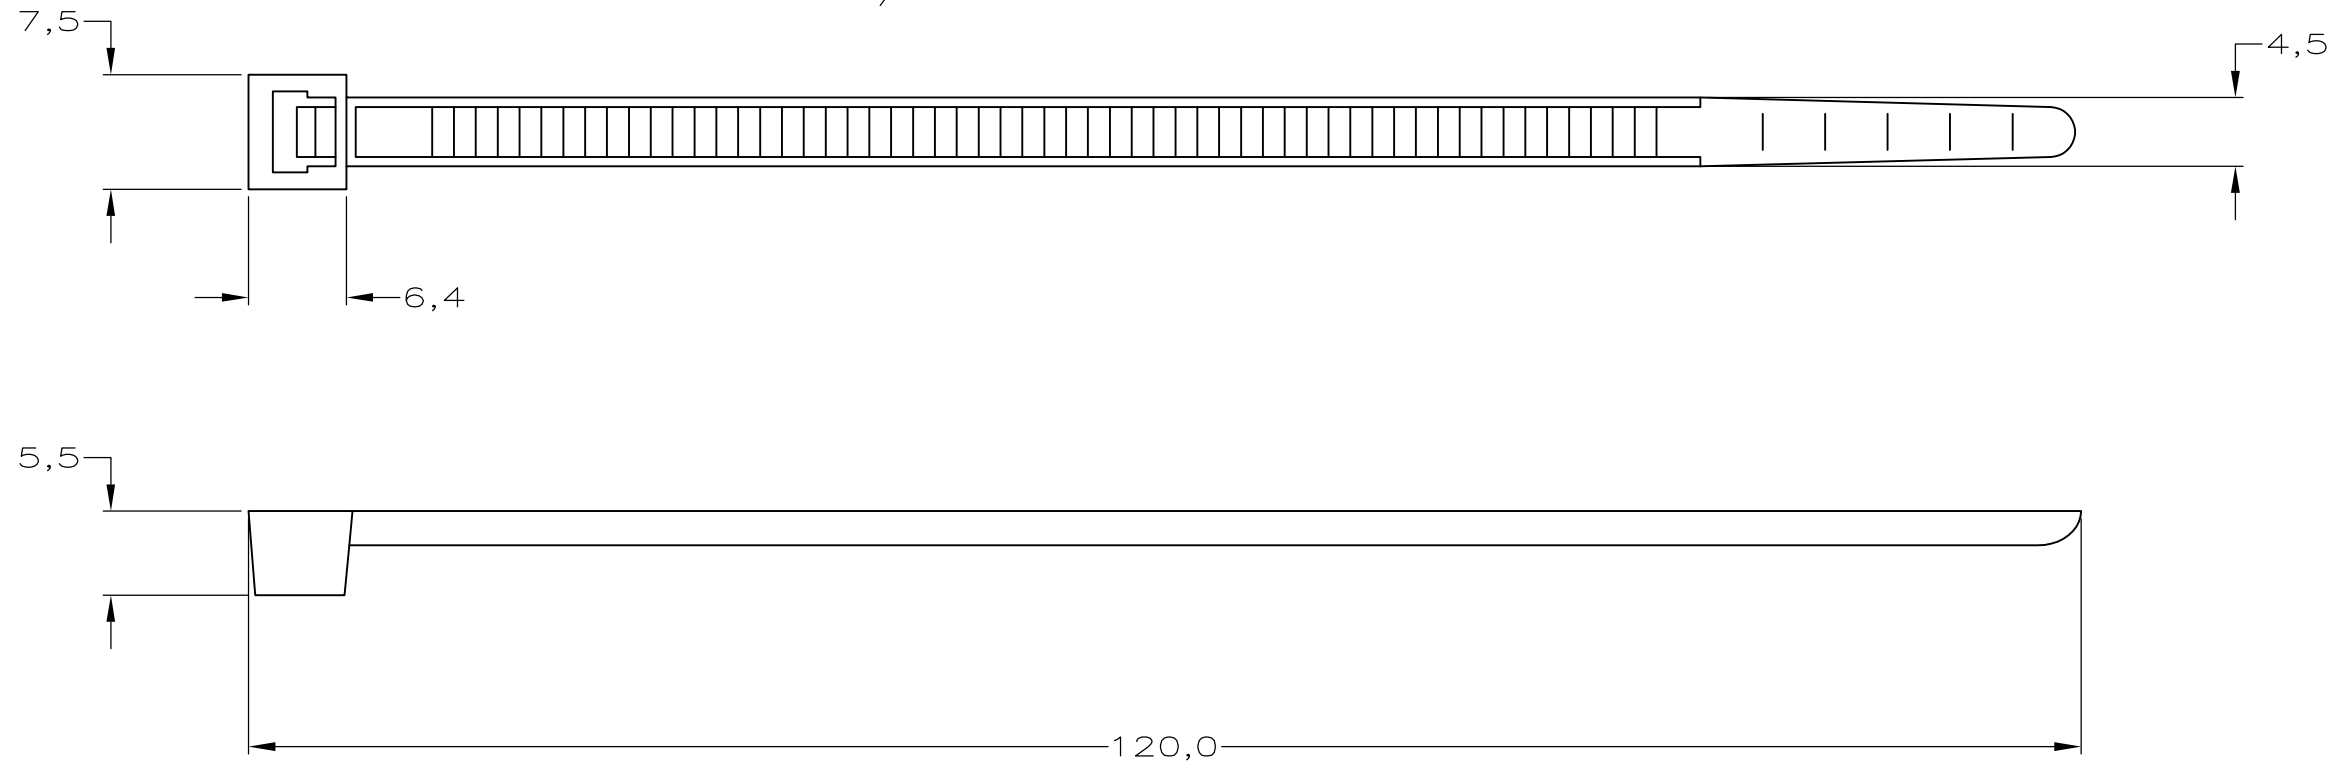

OBSOLETE
3

1000	BLACK	POLYAMIDE 6.6	4-160997-2
1000	NATURAL	POLYAMIDE 6.6	4-160997-1
100	BLACK	POLYAMIDE 6.6	2-160997-2
100	NATURAL	POLYAMIDE 6.6	2-160997-1
QTY	FINISH	MATERIAL	PARTNUMBER
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED © COPYRIGHT 19 — BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION —,19—			
A1	ECO-09-024717	KK	AEG 06NOV09
A	H-9856	JvdH	RV 04-06-92
0	H-9599	JvdH	RV 27-02-92
LTR.	REVISION RECORD	DR.	CHK. DATE
DR.: J.V.D.HEJNDEN.	CHK.: R.VOS.	APP.: L.V.SOEST.	DWG.No.
DATE: 27-02-92	DATE: -	DATE: -	160997
REV.LTR.	SHEET	NAME	
A1	1 OF 1	CABLE TY.	
			A3