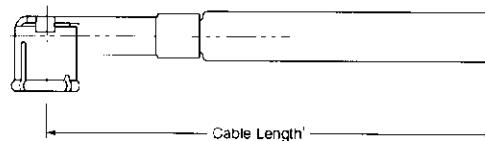
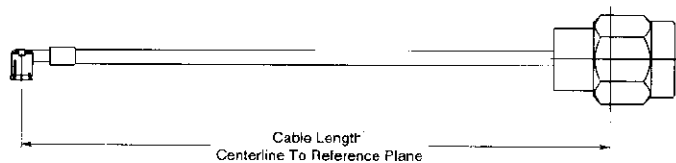


**OSMT Surface Mount Coaxial Connectors** (Continued)**Right Angle Jack Cable Pigtail**


Cable Length	M/A-COM Model No.	Part No.
100 4.0	9950-2100-23	1064331-1
200 8.0	9950-2200-23	1064333-1
305 12.0	9950-2305-23	1064338-1

Note: 1. Consult AMP for non-standard cable lengths.  
Cable length tolerance: 50.0 [1.97]-20000.0 [787.4]:  $\pm (2.0 [0.08] + 1\% \text{ of cable length})$   
2. To avoid damaging the cable, minimize time at temperature while soldering and/or heat shrinking connector to the cable.

**SMA Straight Plug (Male)**  
**Recommended for Customer System Verification**

Cable Length	M/A-COM Model No. PVC Flexible Cable	Part No.
200 8.0	9950-4200-01	1064391-1

Finish: SMA, Passivated stainless steel body and gold plated center contact.

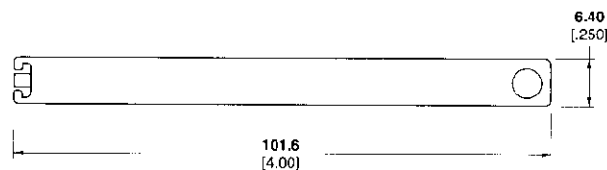**Tools**  
**Engagement/Disengagement Tool**

M/A-COM Model No.	Part No.
2598-5342-54	1221286-1

See Application Notes for instructions.  
For use with 1251802-1 plug only

**Disengagement Tool**

M/A-COM Model No.	Part No.
2598-5401-54	1055886-1

See Application Notes for instructions.  
For use with 1055690-1 plug only