

---

**Connector, Shielded, Miniature Circular DIN, PCB Mounted**

---

**1. SCOPE****1.1. Content**

This specification covers performance, tests and quality requirements for AMP\* miniature circular DIN connector. The connectors are printed circuit board through hole shielded right angle receptacles and shielded and unshielded vertical receptacles.

**1.2. Qualification**

When tests are performed on subject product line, procedures specified in AMP 109 series specifications shall be used. All inspections shall be performed using applicable inspection plan and product drawing.

**2. APPLICABLE DOCUMENTS**

The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, latest edition of the document applies. In the event of conflict between requirements of this specification and product drawing, product drawing shall take precedence. In the event of conflict between requirements of this specification and referenced documents, this specification shall take precedence.

**2.1. AMP Documents**

- A. 109-1: General Requirements for Test Specifications
- B. 109 Series: Test Specifications as indicated in Figure 1. (Comply with MIL-STD-202, MIL-STD-1344 and EIA RS-364)
- C. Corporate Bulletin 401-76: Cross-reference between AMP Test Specifications and Military or Commercial Documents
- D. 501-97: Qualification Test Report

**3. REQUIREMENTS****3.1. Design and Construction**

Product shall be of design, construction and physical dimensions specified on applicable product drawing.

**3.2. Materials**

- A. Contact: Copper alloy
- B. Housing: Thermoplastic, high temperature, UL94V-0
- C. Receptacle shell: Copper alloy

**3.3. Ratings**

- A. Voltage: 30 vac rms or dc per UL and CSA
- B. Current: Signal application only
- C. Temperature: -55 to 105°C

**3.4. Performance and Test Description**

Product is designed to meet electrical, mechanical and environmental performance requirements specified in Figure 1. Unless otherwise specified, all tests shall be performed at ambient environmental conditions per AMP Specification 109-1.

**3.5. Test Requirements and Procedures Summary**

Test Description	Requirement	Procedure
Examination of product.	Meets requirements of product drawing.	Visual, dimensional and functional per applicable quality inspection plan.
<b>ELECTRICAL</b>		
Termination resistance.	20 milliohms maximum initial. 30 milliohms maximum final.	AMP 109-6-1. Subject mated contacts assembled in housing to 50 mv maximum open circuit at 100 ma maximum. See Figure 3.
Insulation resistance.	1000 megohms minimum.	AMP Spec 109-28-4. Test between adjacent contacts of unmated samples.
Dielectric withstanding voltage.	500 vac at sea level.	AMP Spec 109-29-1. Test between adjacent contacts of unmated samples.
Transfer impedance.	30 MHz, -18 dB ohm or better. 160 MHz, -5 dB ohm or better.	AMP Spec 109-175. Measure transfer impedance of mated samples with front panel grounding finger.
<b>MECHANICAL</b>		
Solderability.	See Note.	AMP Spec 109-11-1. Subject samples to solderability.
Vibration, random.	No discontinuities of 1 microsecond or longer duration. See Note.	AMP Spec 109-21-5. Subject mated samples to 16.91 G's rms. 20 minutes in each of 3 mutually perpendicular planes. See Figure 4.
Physical shock.	No discontinuities of 1 microsecond or longer duration. See Note.	AMP Spec 109-26-1. Subject mated samples to 50 G's half-sine shock pulses of 11 milliseconds duration. 3 shocks in each direction applied along 3 mutually perpendicular planes, 18 total shocks. See Figure 4.

Figure 1 (cont)

Test Description	Requirement	Procedure
Durability.	See Note.	AMP Spec 109-27. Mate and unmate 30 $\mu$ inch gold plated samples for 500 cycles at maximum rate of 200 cycles per hour.
Mating force.	9 pounds maximum initial.	AMP Spec 109-42, Condition A. Measure force necessary to mate samples at maximum rate of .5 inch per minute.
Unmating force.	2 pounds minimum.	AMP Spec 109-42, Condition A. Measure force necessary to unmate samples at maximum rate of .5 inch per minute.
<b>ENVIRONMENTAL</b>		
Thermal shock.	See Note.	AMP Spec 109-22. Subject mated samples to 25 cycles between -55 and 105°C.
Humidity-temperature cycling.	See Note.	AMP Spec 109-23-3, Condition B. Subject mated samples to 10 cycles between 25 and 65°C at 95% RH.
Temperature life.	See Note.	AMP Spec 109-43. Subject mated samples to temperature life at 105°C for 500 hours.
Mixed flowing gas.	See Note.	AMP Spec 109-85-2. Subject mated samples to environmental class II for 14 days.

**NOTE** *Shall meet visual requirements, show no physical damage and shall meet requirements of additional tests as specified in Test Sequence in Figure 2.*

Figure 1 (end)

**3.6. Product Qualification and Requalification Test Sequence**

I	Test or Examination	Test Group (a)					
		1	2	3	4	5	6
		Test Sequence (b)					
I	Examination of product	1,9	1,5	1,5	1,8	1,5	1,3
	Termination resistance	3,7	2,4	2,4			
	Insulation resistance				2,6		
	Dielectric withstanding voltage				3,7		
	Transfer impedance					2,4(d)	
I	Solderability						2
	Vibration	5					
	Physical shock	6					
	Durability	4					
	Mating force	2					
	Unmating force	8					
	Thermal shock				4		
	Humidity-temperature cycling				5		
	Temperature life		3(c)			3(e)	
	Mixed flowing gas			3(c)			

**NOTE**

- (a) See Para 4.1.A.
- (b) Numbers indicate sequence in which tests are performed.
- (c) Precondition samples with 10 cycles durability.
- (d) Terminations made with 75% braided shielded cable.
- (e) Use substitute plugs to prevent shielding degradation due to cold flow of cable plastic.

Figure 2

**4. QUALITY ASSURANCE PROVISIONS**

**4.1. Qualification Testing**

A. Sample Selection

Samples shall be prepared in accordance with applicable Instruction Sheets and shall be selected at random from current production. All test groups shall each consist of a minimum of 5 connectors.

B. Test Sequence

Qualification inspection shall be verified by testing samples as specified in Figure 2.

**4.2. Requalification Testing**


If changes significantly affecting form, fit or function are made to product or manufacturing process, product assurance shall coordinate requalification testing, consisting of all or part of original testing sequence as determined by development/product, quality and reliability engineering.

### 4.3. Acceptance

Acceptance is based on verification that product meets requirements of Figure 1. Failures attributed to equipment, test setup or operator deficiencies shall not disqualify product. When product failure occurs, corrective action shall be taken and samples resubmitted for qualification. Testing to confirm corrective action is required before resubmittal.

### 4.4. Quality Conformance Inspection

Applicable AMP quality inspection plan will specify sampling acceptable quality level to be used. Dimensional and functional requirements shall be in accordance with applicable product drawing and this specification.

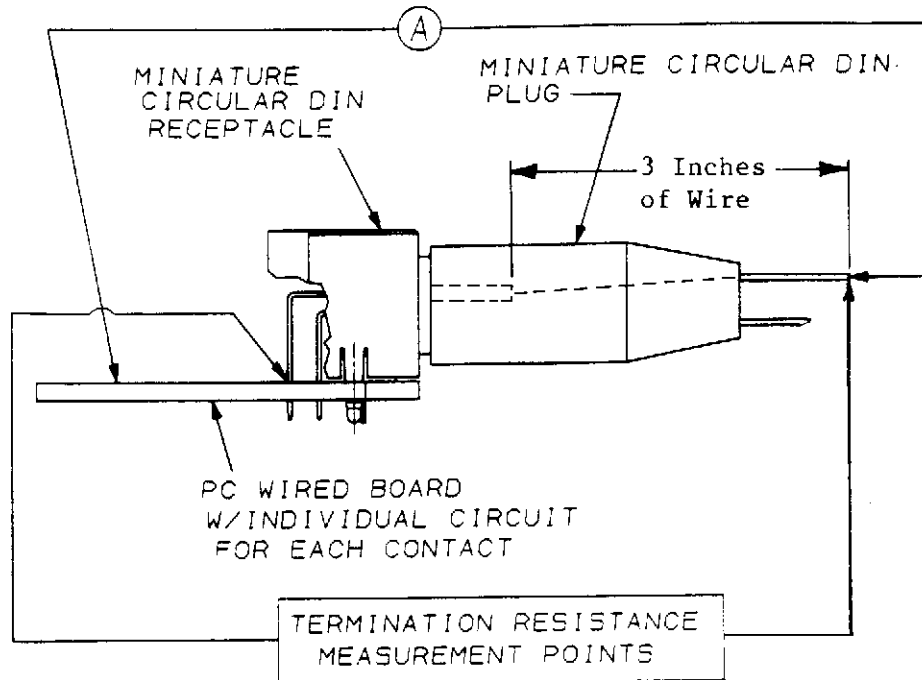**NOTE**

*3 inches wire bulk to be subtracted from termination resistance.*

Figure 3  
Termination Resistance Measurement Points

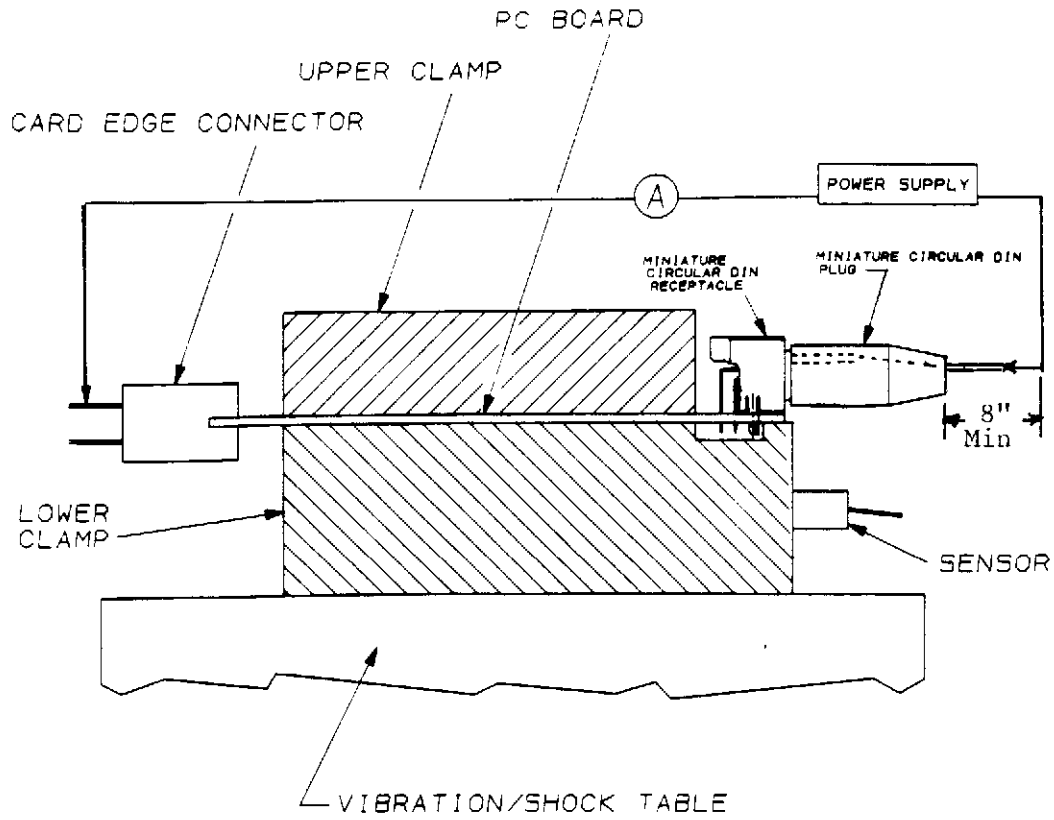


Figure 4  
Vibration & Physical Shock Mounting Fixture