
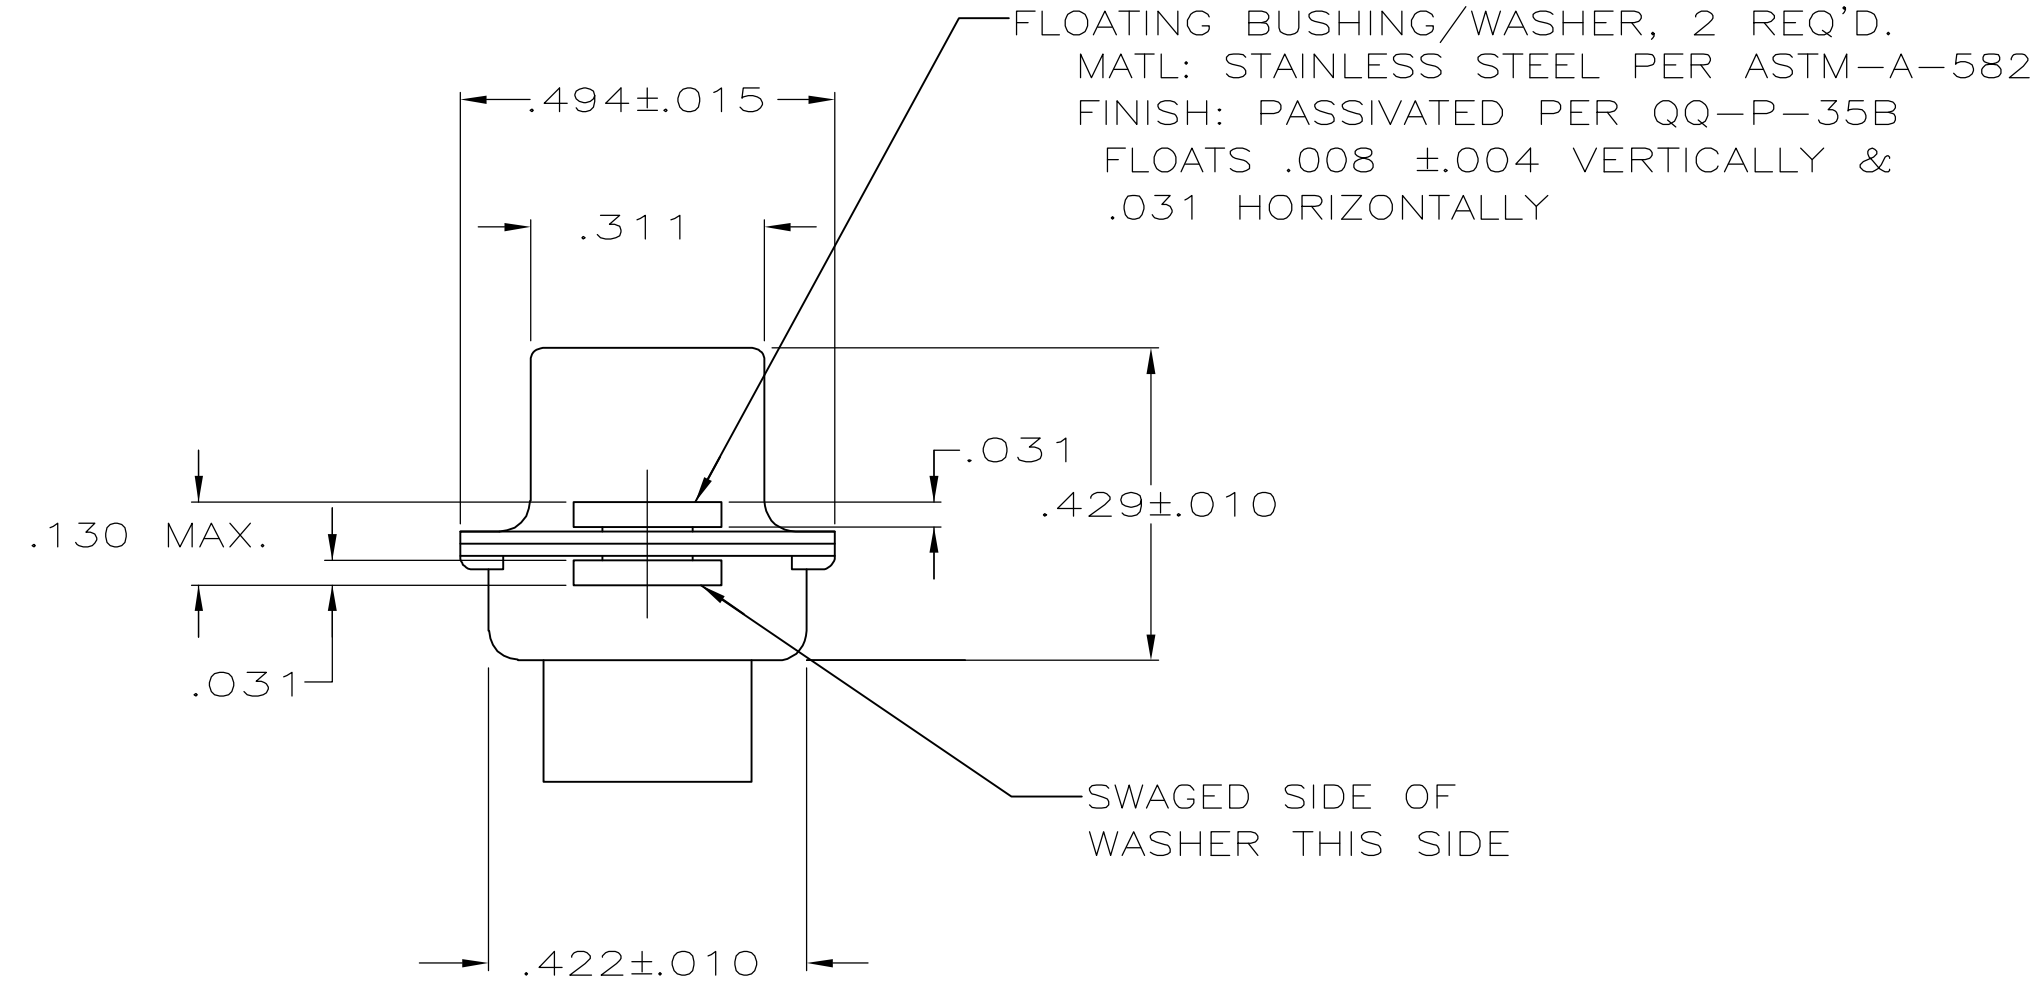
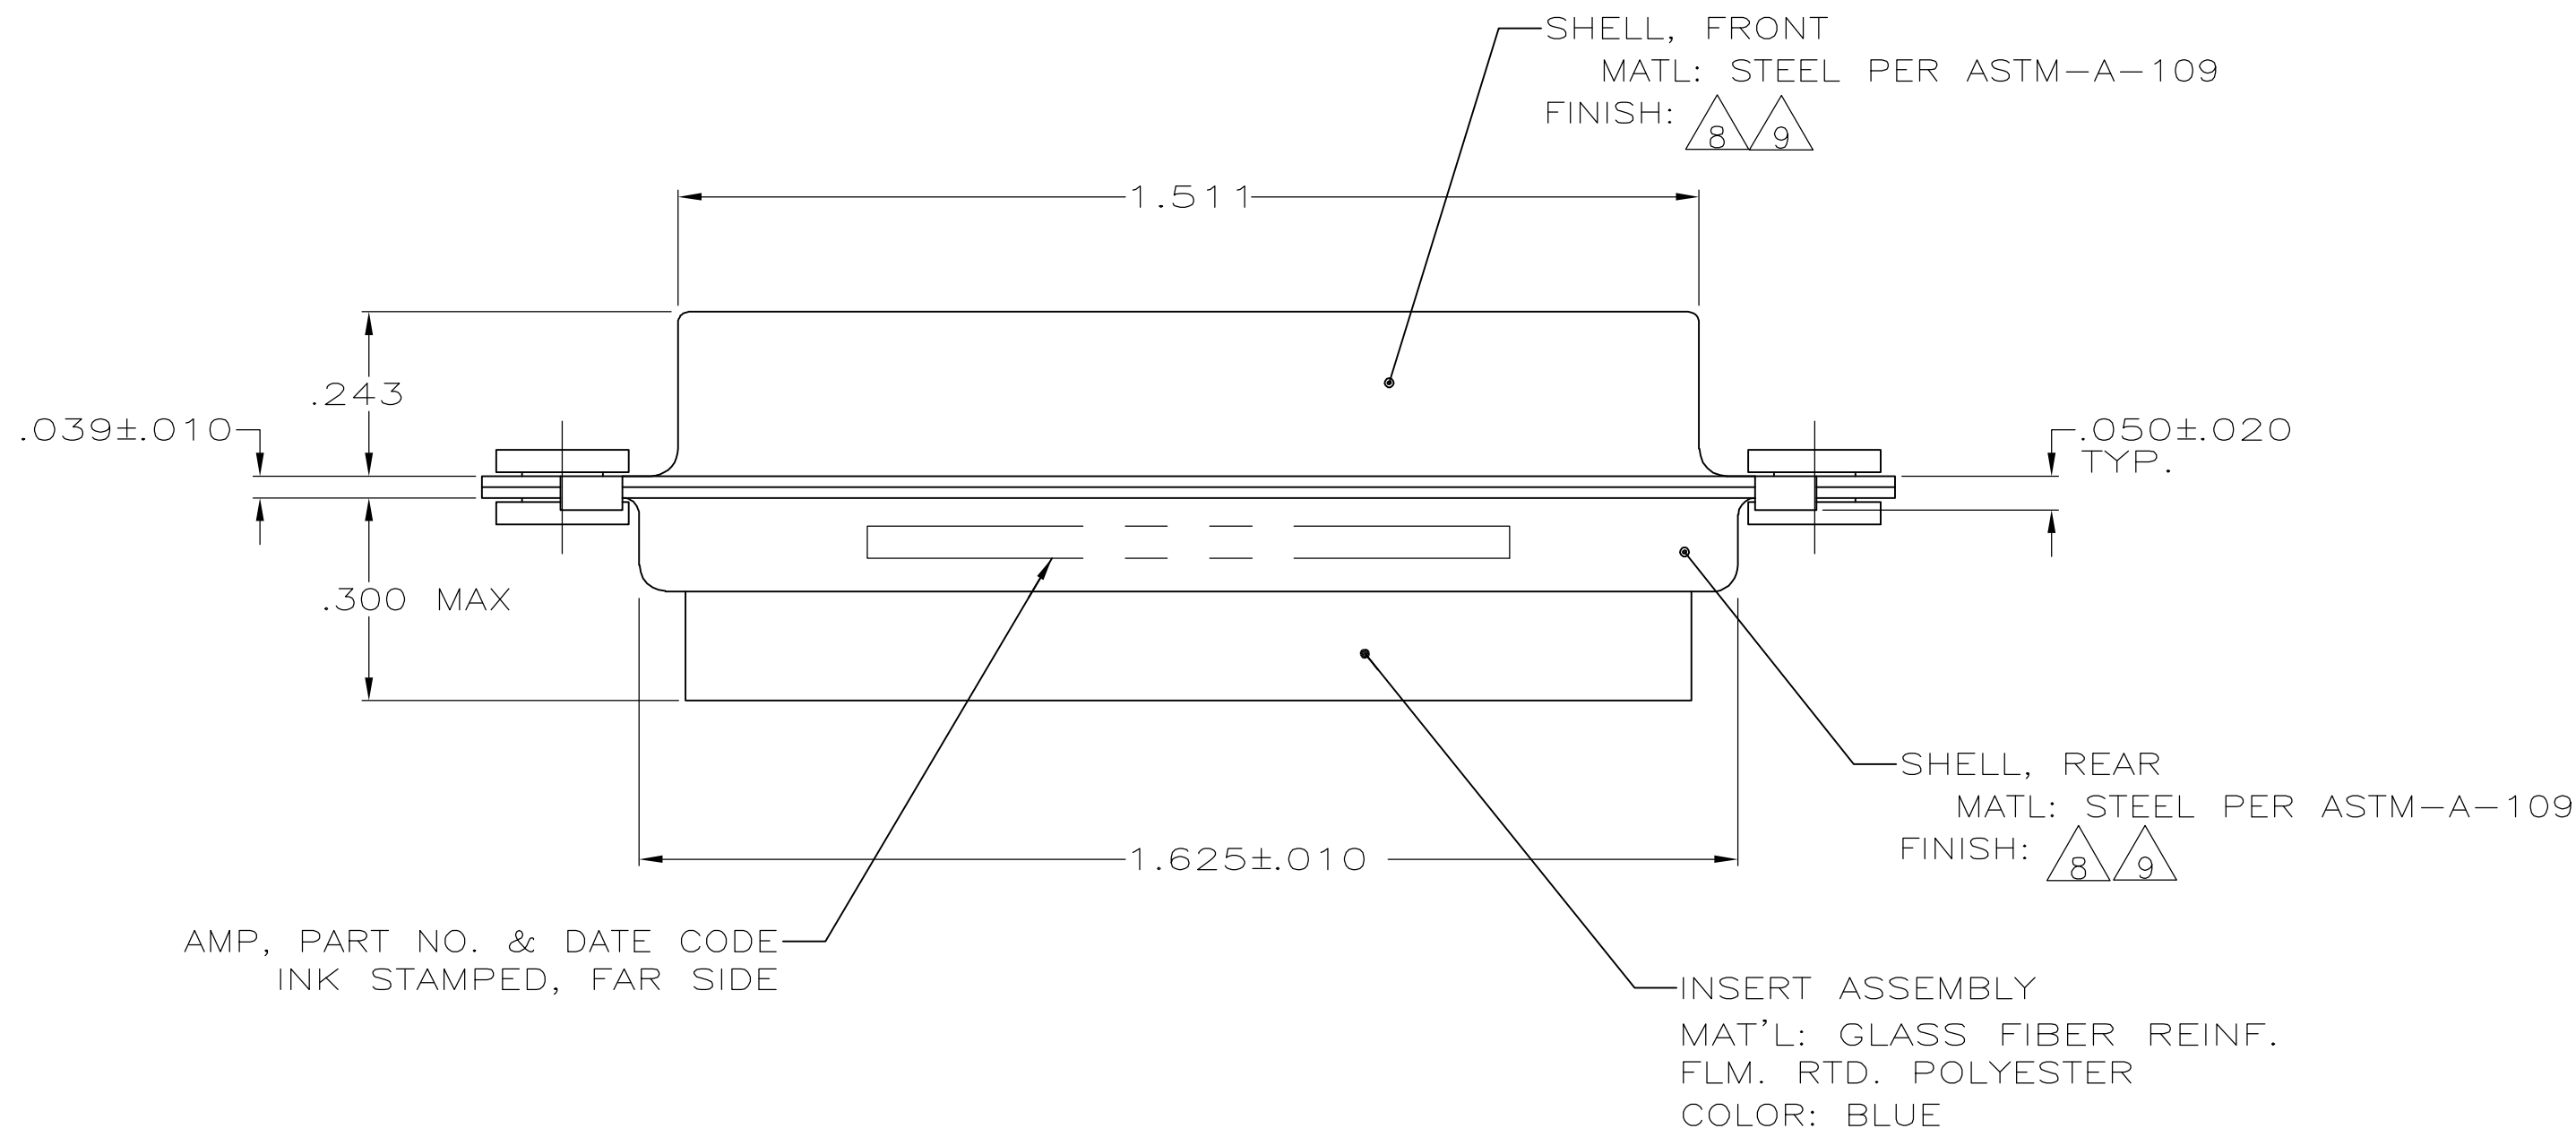


LOC	DIST	REVISIONS					
DF	DO	P	LTR	DESCRIPTION	DATE	DWN	APVD
			K	REV PER ECO-05-014837	28DEC05	PY	DM

1. THIS RECEPTACLE WILL MATE WITH ANY 17C2,SIZE 3 PLUG IN AMPLIMITE SERIES.
2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS RECEPTACLE IS .068 DIA.
3. STAINLESS STEEL RETENTION CLIPS (15) ARE INCLUDED IN INSERT ASSEMBLY.
- 4 CONNECTOR SUPPLIED WITH (17) SIGNAL SOCKET CONTACTS; PACKAGED IN A SEPARATE BAG. SIZE 8 POWER/COAX CONTACTS SOLD SEPARATELY.
5. USE 2 SIZE 8 POWER OR COAX SOCKET CONTACTS. CONSULT PRODUCT ENGINEERING FOR MORE DETAILS
- 6 UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL.
- 7 MATING FACE SIZE 8 PORTS CHAMFERED TO ACCOMODATE BLINDMATE APPLICATION. BLIND MATE PLUG 447724-1 WILL MATE WITH THIS CONNECTOR.
- 8 CADMIUM PER QQ-P-416
- 9 FINISH: ZINC PLATE PER ASTM-B-633, .000200-.000400 THK WITH SUPPLEMENTARY CHROMATE (Cr3+)

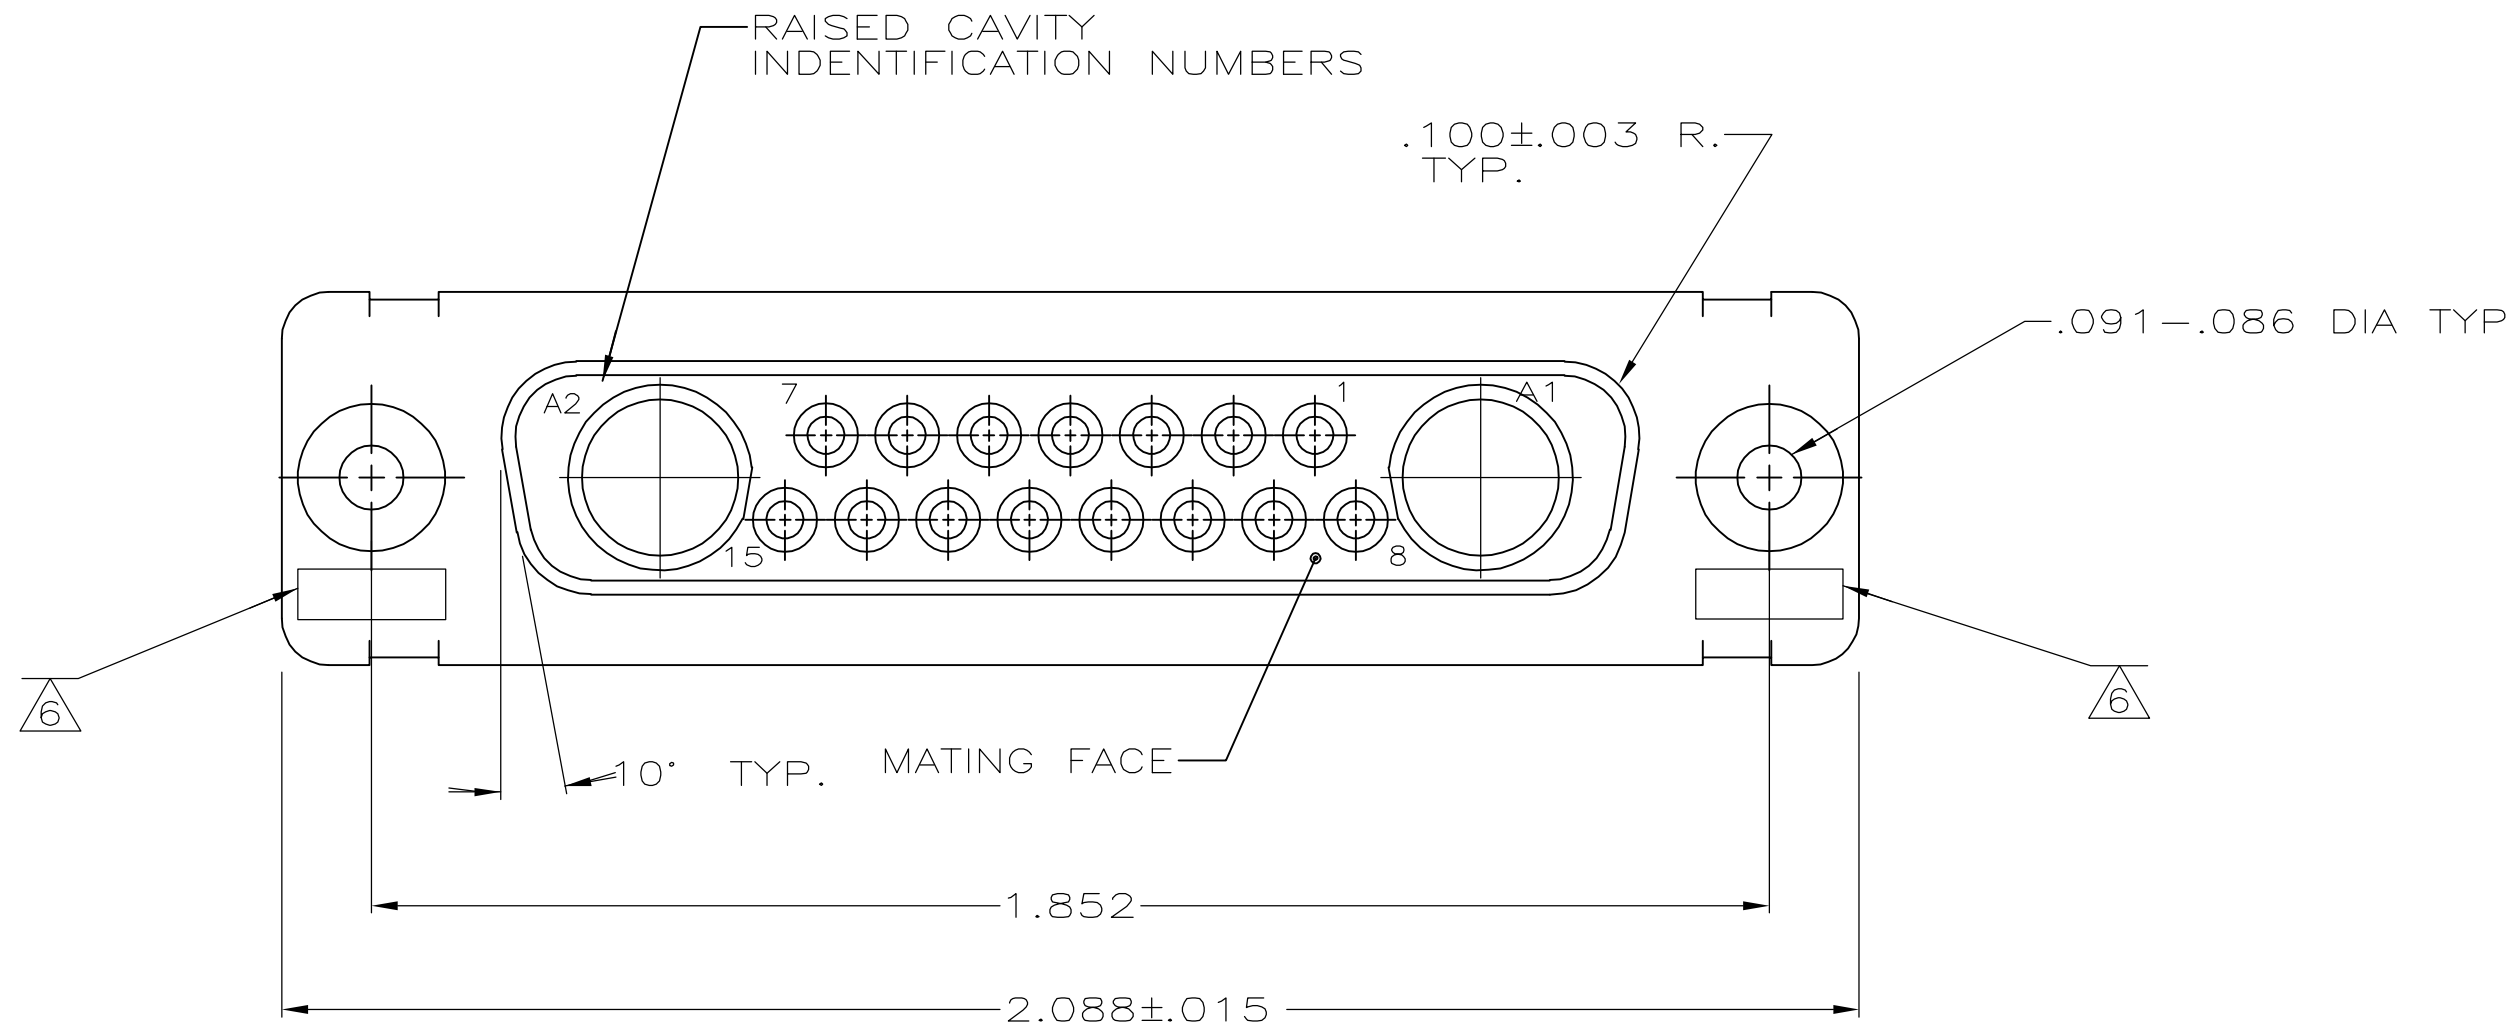

7 9	5-212053-3
7 8	212053-3
8	212053-2
4 8	212053-1
REMARKS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 2-2-88	tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
		CHK A.F.MADI 2-9-88		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME
	0 PLC ± —	APVD —	PRODUCT SPEC	RCPT. ASS'Y, AMPLIMITE 17C2, SIZE 3, SERIES 109 COAX MIX, W/FLOAT BUSHINGS
	1 PLC ± —	—	—	
	2 PLC ± —	—	—	
	4 PLC ± .005	—	APPLICATION SPEC	
	4 PLC ± —	—	—	
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS		SIZE CASE CODE DRAWING NO RESTRICTED TO
		WEIGHT —		A1 00779 C=212053 —
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1 REV K