


LOC		DIST		REVISIONS			
DF	DO	REV	DATE	BY	CHK	APPV	
D		REV PER	ECO-06-018048	05OCT06	PY	DM	

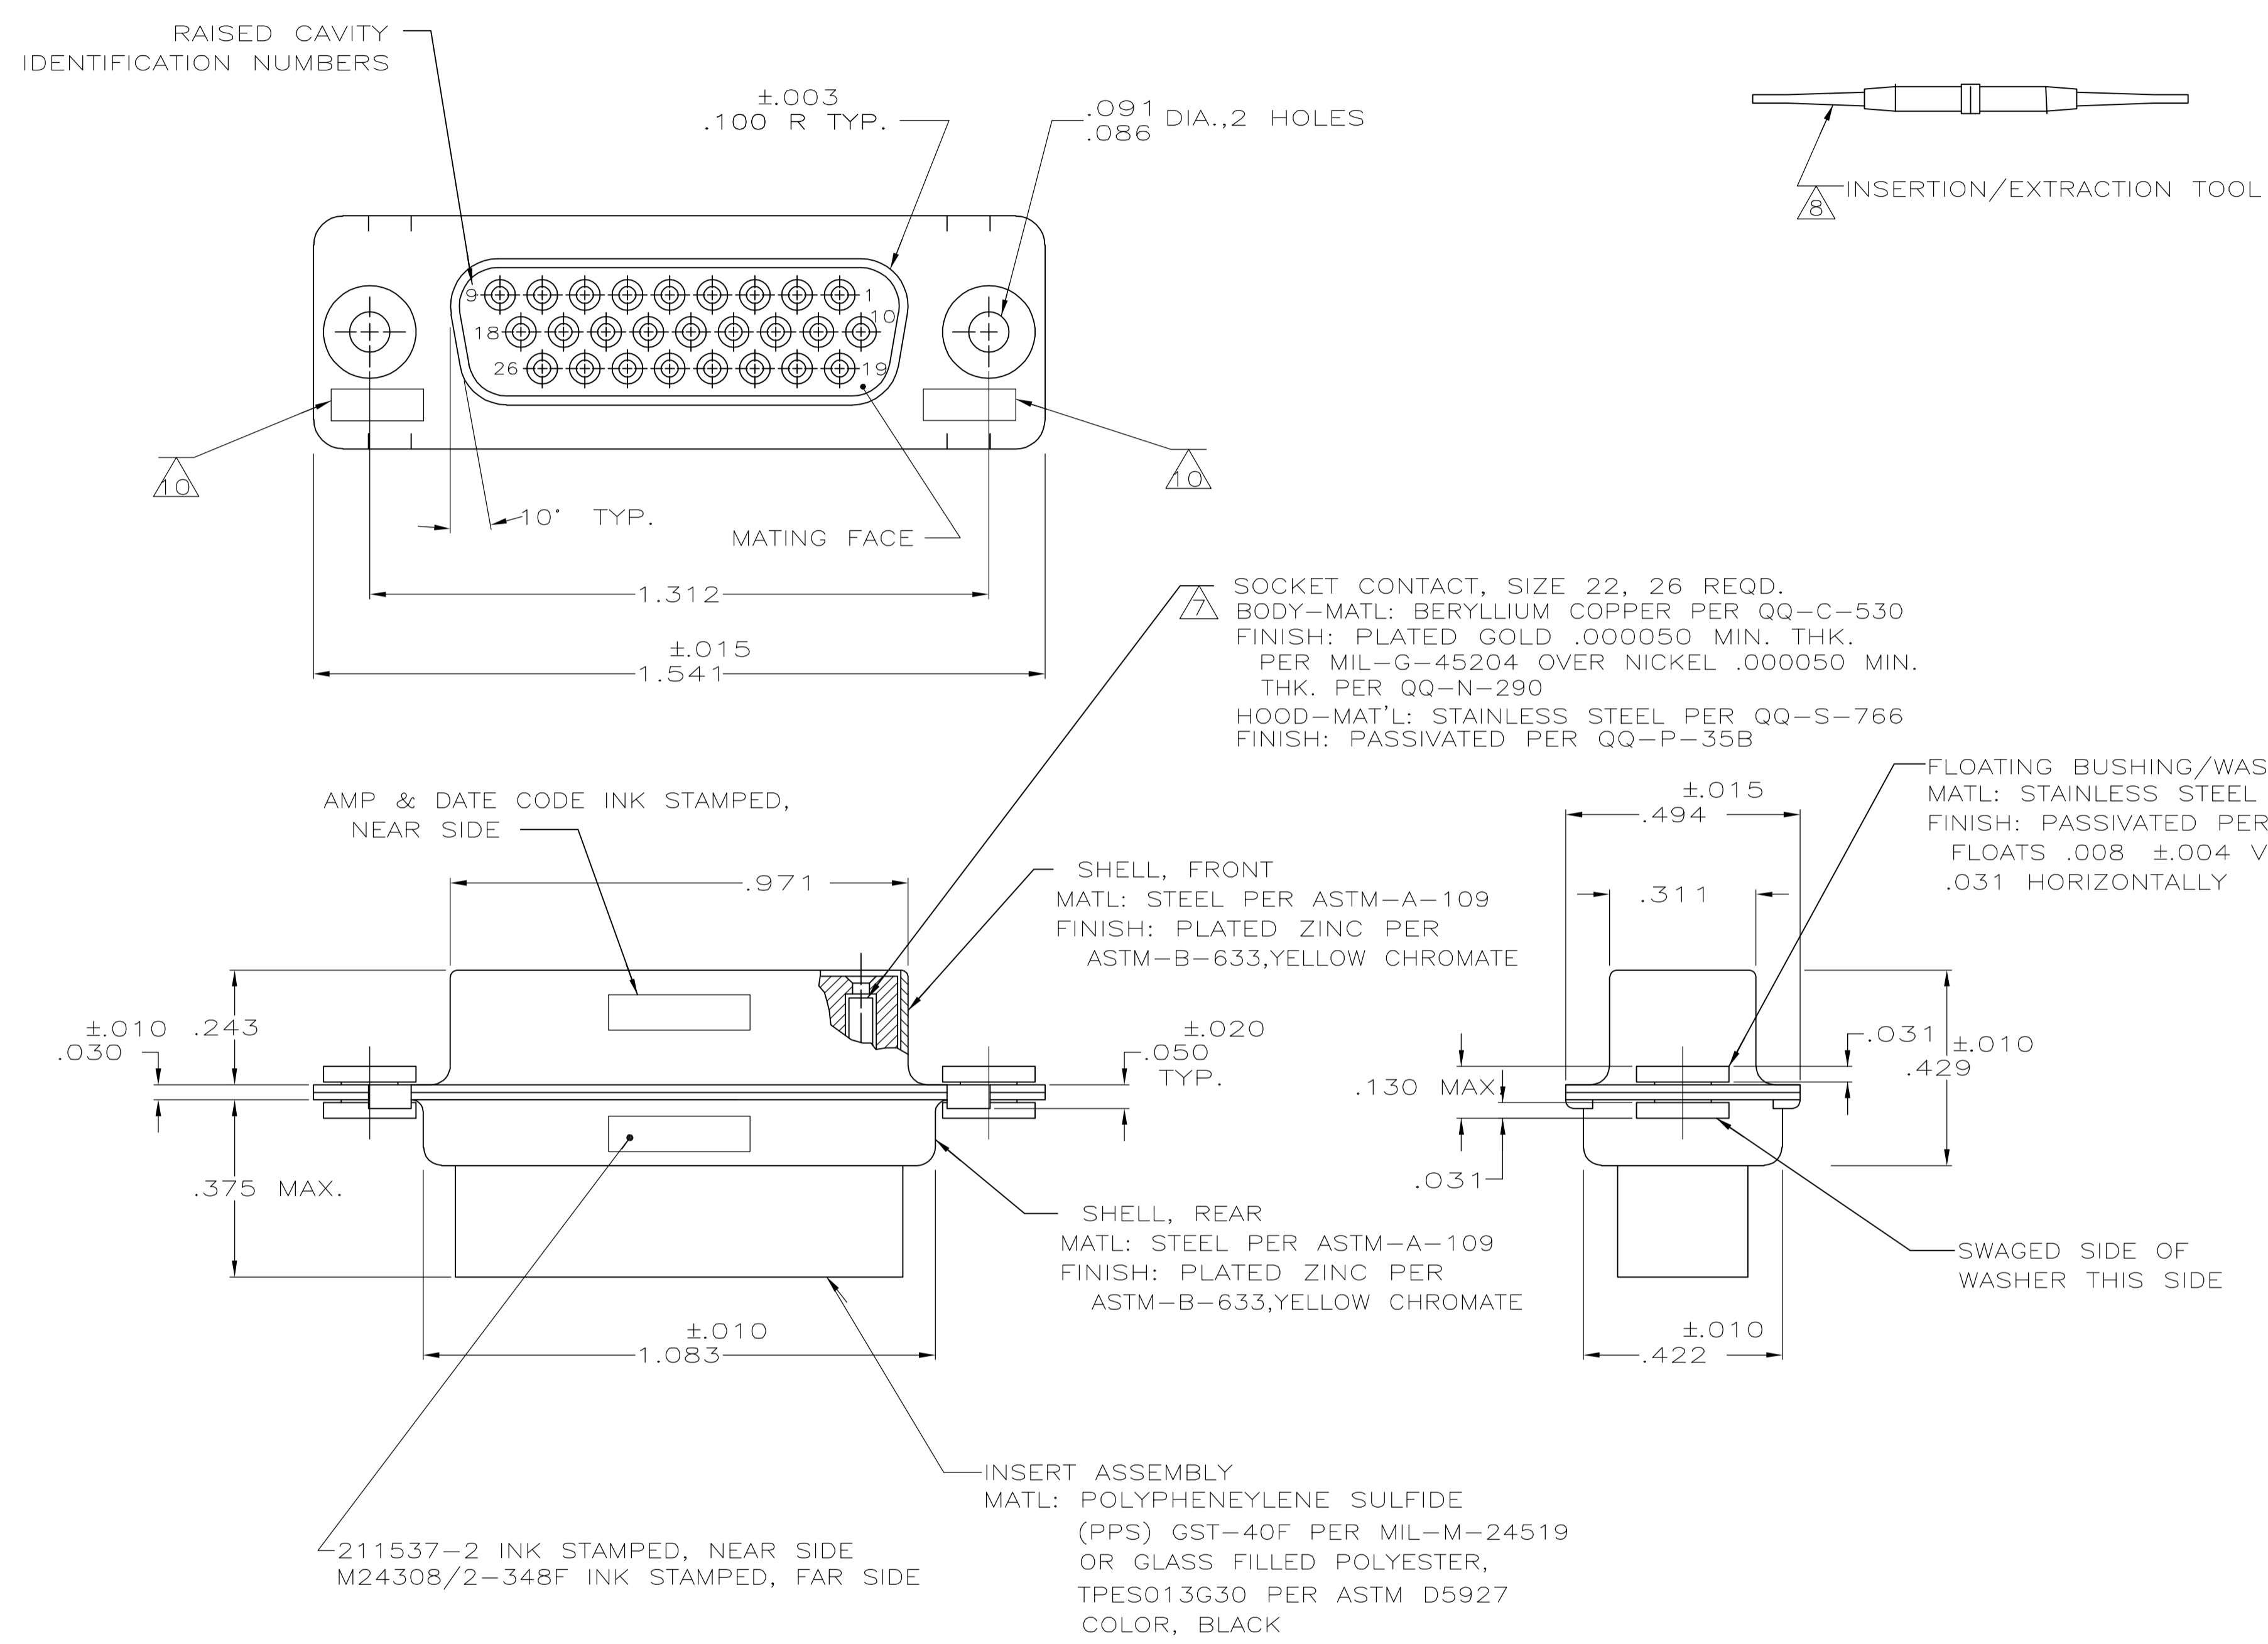

1. THIS RECEPTACLE WILL MATE WITH ANY 26 POSN., SIZE 2 PLUG IN AMPLIMITE SERIES.
2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS RECEPTACLE IS .054 DIA.
3. SST RETENTION CLIPS ARE INCLUDED IN INSERTS.

- 4 PACKAGE STAMPED M24308/2-488F & AMP P/N 211537-1
- 5 PACKAGE STAMPED M24308/2-348F & AMP P/N 211537-2
- 6 PACKAGE STAMPED M24308/2-359F & AMP P/N 211537-3
- 7 AMP P/N 204351-1; MIL P/N 57-354, INCLUDED IN KIT
- 8 AMP P/N 91067-1; MIL P/N M81969/1-04
- 9 CONNECTOR SUPPLIED WITHOUT CONTACTS; SHOWN FOR ILLUSTRATION ONLY.
- 10 UL/CSA DESIGNATION STAMPED IN THIS AREA.

SUPSD BY 204538-2 & 91067-1	SAME AS -1 EXCEPT: 6, 7, 8	211537-3
	SAME AS -1 EXCEPT: 5, 7	211537-2
	AS SHOWN	211537-1
	DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DW: D ERDMAN 7-1-85	Tyco Electronics Corporation	
DIMENSIONS: INCHES		CHK: R. GRZYBOWSKI 9-20-85	Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: G. SACUNAS 9-20-85	NAME: RECEPTACLE ASS'Y., AMPLIMITE, 26 POSN., SIZE 2, SERIES 90, W/DUAL FLOAT BUSHINGS	
0 PLC ± -		PRODUCT SPEC	SIZE: A1	CAGE CODE: 00779
1 PLC ± -		APPLICATION SPEC	SCALE: NTS	SHEET: 1 OF 1
2 PLC ± -		WEIGHT: -	REV: -	REV: -
3 PLC ± .005		CUSTOMER DRAWING	DRAWING NO: 211537	
4 PLC ± -		RESTRICTED TO: -		
ANGLES ± -		SCALE: NTS SHEET 1 OF 1 REV: -		