


Video Cable

Non-Plenum 26 AWG High Resolution Coaxial Cable



Product Specifications


- ▲ Application: R-G-B Video with or without Sync(s)
- ▲ Conductor: 26 AWG 7/34 Tin Plated Copper
- ▲ Insulation: Foam Polyolefin
- ▲ Coaxial Shield: 38 AWG Tin Plated Copper Spiral
- ▲ Coaxial Jacket: Flexible PVC
- ▲ Outer Jacket: Flexible PVC
- ▲ UL Listing: Type CL2
- ▲ CSA Certification: Type CMH
- ▲ Ripcord to facilitate stripping of jacket.

Non-Plenum 26 AWG Multi-Coaxial Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	18
Attenuation (dB/ft)	
100 MHz	0.055
200 MHz	0.080
400 MHz	0.120
700 MHz	0.169
900 MHz	0.198
1000 MHz	0.210

Number of Coax	AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Colors	Part Number	Spec Number
3	26 (7/34 TC)	0.077 [1.95]	0.290 [7.37]	None	Red, Green, Blue	03CEE00007	13993
4	26 (7/34 TC)	0.077 [1.95]	0.320 [8.19]	None	Red, Green, Blue, Black	04CEE00004	13994
5	26 (7/34 TC)	0.077 [1.95]	0.350 [8.89]	None	Red, Green, Blue, Black, White	05CEE00004	13995
6	26 (7/34 TC)	0.077 [1.95]	0.380 [9.65]	None	Red, Green, Blue, White Yellow, Black	06CEE00005	100-7229

Plenum 26 AWG High Resolution Super Flexible Coaxial Cable



Product Specifications

- ▲ Application: R-G-B Video with or without Sync(s)
- ▲ Conductor: 26 AWG 7/34 Tin Plated Copper
- ▲ Insulation: Foam Fluoropolymer
- ▲ Coaxial Shield: Tin Plated Copper Spiral
- ▲ Coaxial Jacket: PVC
- ▲ Outer Jacket: PVC
- ▲ UL Listing: Type CL2P
- ▲ CSA Certification: Type CMP
- ▲ Ripcord to facilitate stripping of jacket.

Plenum 26 AWG Coax Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	16
Attenuation (dB/ft)	
100 MHz	0.055
200 MHz	0.080
400 MHz	0.120
700 MHz	0.169
900 MHz	0.198
1000 MHz	0.210

Number of Coax	AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Colors	Part Number	Spec Number
3	26 (7/34 TC)	0.072 [1.83]	0.255 [6.48]	Alum/Polyester + 22 (7/30TC) Drain	Red, Green, Blue	037EE00005	100-6050
4	26 (7/34 TC)	0.072 [1.83]	0.280 [7.11]	Alum/Polyester + 22 (7/30TC) Drain	Red, Green, Blue, Yellow	047EE00004	100-6049
5	26 (7/34 TC)	0.072 [1.83]	0.310 [7.87]	Alum/Polyester + 22 (7/30TC) Drain	Red, Green, Blue, Black, Yellow	057EE00018	100-5125
6	26 (7/34 TC)	0.072 [1.83]	0.340 [8.64]	Alum/Polyester + 22 (7/30TC) Drain	Red, Green, Blue, Yellow, White, Black	067EE00005	100-6051

Note: Digital Video Coax available. Please call Madison Cable.

Video Cable (Continued)

Plenum 18 AWG Super High Resolution/Long Distance Video Cable



Product Specifications


- ▲ **Application:** Super High Resolution video cables for long distance cable runs/low loss.
- ▲ **Conductor:** 18 AWG Solid Bare Copper
- ▲ **Insulation:** Foam Fluoropolymer
- ▲ **Coaxial Shield:** Tin Plated Copper Braid 95% Coverage and Aluminum/Polyester/Aluminum Tape
- ▲ **Outer Jacket:** Flexible PVC
- ▲ **UL Listing:** Type CL2P
- ▲ **CSA Certification:** Type CMP

Plenum 18 AWG Super High Resolution/Long Distance Video Cable Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	18.5
Attenuation (dB/ft)	
100 MHz	0.022
200 MHz	0.032
400 MHz	0.046
1000 MHz	0.077

Number of Coax	AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Colors	Part Number	Spec Number
1	18	0.170	0.225	None	Gray	017JC00004	100-7240

Non-Plenum 18 AWG Super High Resolution/Long Distance Video Cable



Product Specifications

- ▲ **Application:** Super High Resolution video cables for long distance cable runs/low loss.
- ▲ **Conductor:** 18 AWG Solid Bare Plated Copper
- ▲ **Insulation:** Foam Polyolefin
- ▲ **Coaxial Shield:** Tin Plated Copper Braid 95% Coverage and Aluminum/Polyester/Aluminum Tape
- ▲ **Outer Jacket:** PVC
- ▲ **UL Listing:** CL2


Non-Plenum 18 AWG Super High Resolution/Long Distance Video Cable Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	17
Attenuation (dB/ft)	
100 MHz	0.022
200 MHz	0.032
400 MHz	0.046
1000 MHz	0.077

Number of Coax	AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Colors	Part Number	Spec Number
1	18	0.185 [4.70]	0.280 [7.11]	None	Black	01CJC00006	100-7248
4	18	0.185 [4.70]	0.710 [18.03]	None	Black	04CJF00001	100-7238
5	18	0.185 [4.70]	0.780 [19.81]	None	Black	05CJF00001	100-7239

Video Cable (Continued)

Super-Flexible Plenum S-Video Cable



Product Specifications

- ▲ Application: Y/C Signals for all display screens
- ▲ Conductor: 26 AWG 7/34 Tin Plated Copper
- ▲ Insulation: Foam Fluoropolymer
- ▲ Coaxial Shield: Tin Plated Spiral with Aluminum/Polyester Tape
- ▲ Coaxial Jacket: PVC
- ▲ Outer Jacket: Flexible PVC
- ▲ UL Listing: CL2P
- ▲ Ripcord to facilitate stripping of jacket.


Plenum S-Video Cable

Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	16
Attenuation (dB/ft)	
100 MHz	0.055
200 MHz	0.080
400 MHz	0.120
1000 MHz	0.210

Number of Coax	AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Colors	Part Number	Spec Number
2	26 (7/34)	0.072 [1.83]	0.240 [6.10]	None	White, Yellow	027EE00004	100-6399

Non-Plenum S-Video Cable



Product Specifications

- ▲ Application: Y/C signals for all display screens
- ▲ Conductor: 18 AWG Solid Bare Plated Copper
- ▲ Insulation: Foam Polyolefin
- ▲ Coaxial Shield: Tin Plated Spiral with Aluminum/Polyester Tape
- ▲ Coaxial Jacket: PVC
- ▲ Outer Jacket: Flexible PVC
- ▲ UL Listing: CL2

Non-Plenum S-Video Cable

Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	16
Attenuation (dB/ft)	
100 MHz	0.055
200 MHz	0.080
400 MHz	0.120
1000 MHz	0.210

Number of Coax	AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Colors	Part Number	Spec Number
2	26 (7/34)	0.077 [1.96]	0.250 [6.35]	None	White, Yellow	02CEE00003	100-7236

Video Cable (Continued)

Super-Flexible Plenum Composite Cable



Product Specifications

- ▲ Application: Installation Cables for Audio/Video Applications
- ▲ Outer Jacket: PVC
- ▲ UL Listing: CL2P
- ▲ Ripcord to facilitate stripping of jacket.


Plenum Composite Cable

Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	16
Attenuation (dB/ft)	
100 MHz	0.055
200 MHz	0.080
400 MHz	0.120
1000 MHz	0.210

Number of Conductors		AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Part Number	Spec Number
Total	Type						
10	6 Coax	26 (7/34 TC)	0.072 [1.83]	0.350 [8.89]	None	10ZEQ00003	100-7250
	2 Pair	26 (7/34 TC)	0.031 [0.79]				
14	3 Coax	26 (7/34 TC)	0.072 [1.83]	0.295 [7.49]	None	14ZEQ00002	100-7249
	2 Pair (Shielded)	26 (7/34 TC)	0.031 [0.79]				
	7 Conductors	26 (7/34 TC)	0.031 [0.79]				
18	6 Coax	26 (7/34 TC)	0.072 [1.83]	0.420 [10.67]	Aluminum Mylar 36AWG TC Braid	18ZZS00008	100-3480
	4 Pair (Shielded)	26 (7/34 TC)	0.031 [0.79]				
	4 Conductors	20 (7/28 TC)	0.050 [1.27]				

Non-Plenum Composite Cable



Product Specifications

- ▲ Application: Installation Cables for Audio/Video Applications
- ▲ Outer Jacket: Flexible PVC
- ▲ UL Listing: CL2
- ▲ Ripcord to facilitate stripping of jacket.

Plenum Composite Cable


Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	16
Attenuation (dB/ft)	
100 MHz	0.055
200 MHz	0.080
400 MHz	0.120
1000 MHz	0.210

Number of Conductors		AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Part Number	Spec Number
Total	Type						
10	3 Coax	28 (7/36 TC)	0.062 [1.57]	0.295 [7.49]	Aluminum/Polyester/ Aluminum 80% TC Braid	10ZZW00008	13980
	7 Conductors	24 (7/32 TC)	0.038 [0.97]				
14	3 Coax	26 (7/34 TC)	0.072 [1.83]	0.350 [8.89]	Aluminum/Polyester/ Aluminum 85% TC Braid	14ZES00004	100-3445
	2 Pair (Shielded)	26 (7/34 TC)	0.031 [0.79]				
	7 Conductors	26 (7/34 TC)	0.031 [0.79]				
18	6 Coax	26 (7/34 TC)	0.077 [1.96]	0.465 [11.81]	Aluminum/Polyester/ Aluminum 85% TC Braid	18ZZS00012	100-7232
	4 Pair (Shielded)	26 (7/34 TC)	0.033 [0.84]				
	4 Conductors	20 (7/28 TC)	0.055 [1.40]				

Video Cable (Continued)

DVI-Single Channel



Product Specifications

- ▲ Application: Digital Video Interface
- ▲ Outer Jacket: Super Flexible PVC
- ▲ UL Listing: AWM


DVI Single Channel Digital Cable

Electrical Data

Impedance (Ohms)	100
Capacitance (pF/ft)	14
Attenuation (dB/ft)	
1 MHz	0.010
10 MHz	0.040
50 MHz	0.077
100 MHz	0.100
200 MHz	0.150
400 MHz	0.210
800 MHz	0.260
1000 MHz	0.300

Number of Conductors		AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Part Number	Spec Number
Total	Type						
13	3 Conductors	28 (7/36 TC)	0.027 [0.69]	0.275 [6.69]	Aluminum/Polyester/ Aluminum 80% TC Braid	13ZDS00005	100-4533
	4 Pairs (Shielded)	28 (7/36 TC)	0.040 [1.02]				
	1 Pair	28 (7/36 TC)	0.027 [0.69]				

DVI-Dual Channel



Product Specifications

- ▲ Application: Digital Video Interface
- ▲ Outer Jacket: Super Flexible PVC
- ▲ UL Listing: AWM

Dual Channel Digital Cable

Electrical Data

Impedance (Ohms)	100
Capacitance (pF/ft)	14
Attenuation (dB/ft)	
1 MHz	0.010
10 MHz	0.040
50 MHz	0.077
100 MHz	0.100
200 MHz	0.150
400 MHz	0.210
800 MHz	0.260
1000 MHz	0.300

Number of Conductors		AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Part Number	Spec Number
Total	Type						
19	3 Conductors	28 (7/36 TC)	0.027 [0.69]	0.330 [8.38]	Aluminum/Polyester/ Aluminum 80% TC Braid	19ZDS00002	100-4529
	7 Pair (Shielded)	28 (7/36 TC)	0.040 [1.02]				
	3 Pair	28 (7/36 TC)	0.027 [0.69]				

Video Cable (Continued)

DVI-Integrated



Product Specifications

- ▲ Application: Digital/Analog Video Interface
- ▲ Outer Jacket: Super Flexible PVC
- ▲ UL Listing: AWM


Composite-Integrated Cable

Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	18
Attenuation (dB/ft)	
1 MHz	0.008
10 MHz	0.026
50 MHz	0.058
100 MHz	0.082
200 MHz	0.120
400 MHz	0.170
800 MHz	0.240
1000 MHz	0.300

Number of Conductors		AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Part Number	Spec Number
Total	Type						
29	3 Coax	30 (7/38 TC)	0.051 [1.30]	0.410 [10.41]	Aluminum/Polyester/ Aluminum 80% TC Braid	29ZZS00002	100-1519
	6 Conductors	28 (7/36 TC)	0.027 [0.69]				
	2 Pair (Shielded)	28 (7/36 TC)	0.027 [0.69]				
	7 Pair (Shielded)	28 (7/36 TC)	0.040 [1.02]				
	1 Pair	28 (7/36 TC)	0.027 [0.69]				

Rental/Staging Cable



Product Specifications

- ▲ Application: Rental and Staging Applications
- ▲ Conductor: 26 AWG 7/34 Tin Plated Copper
- ▲ Insulation: Polyolefin
- ▲ Coaxial Shield: 38 AWG Tin Plated Copper Braid 90% Coverage
- ▲ Coaxial Jacket: Flexible PVC
- ▲ Outer Jacket: Super Flexible PVC
- ▲ UL Listing: AWM
- ▲ Ripcord to facilitate stripping of jacket.

Rental/Staging Cable


Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	20
Attenuation (dB/ft)	
100 MHz	0.047
400 MHz	0.094
1000 MHz	0.149

No. of Coax	AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Colors	Part Number	Spec Number
5	26	0.120 [3.05]	0.570 [14.78]	None	Red, Green, Blue, Black, Yellow	05PEE00002	100-7230

Video Cable (Continued)

30 AWG Multi-Coaxial Cable



Product Specifications


- ▲ **Application:** R-G-B Video components with or without Sync(s) for TV/Display devices
- ▲ **Conductor:** 30 AWG 7/38 Tin Plated Copper
- ▲ **Insulation:** Foam Polyolefin
- ▲ **Coaxial Shield:** Tin Copper Braid 90% Coverage
- ▲ **Coaxial Jacket:** PVC 0.097 inch [2.46] diameter
- ▲ **Outer Jacket:** Gray PVC
- ▲ **UL Listing:** Type CL2 or AWM Style 20276
- ▲ **CSA Certification:** AWM II A/B FT1, or AWM II A/B FT4

30 AWG Coaxial Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	18.5
Attenuation (dB/ft)	
1 MHz	0.008
10 MHz	0.025
50 MHz	0.056
100 MHz	0.080
200 MHz	0.120
400 MHz	0.170
700 MHz	0.240
900 MHz	0.280
1000 MHz	0.300

Number of Coax	AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Colors	Part Number	Spec Number
3	30 (7/38 TC)	0.058 [1.47]	0.275 [6.99]	None	Red, Green, Blue	03KBE00001	13982
3	30 (7/38 TC)	0.058 [1.47]	0.300 [7.62]	Alum/Polyester + 85% TC Braid	Red, Green, Blue	03KBG00002	13983
4	30 (7/38 TC)	0.058 [1.47]	0.300 [7.62]	None	Red, Green, Blue, Black	04KBE00005	13984
4	30 (7/38 TC)	0.058 [1.47]	0.325 [8.26]	Alum/Polyester + 85% TC Braid	Red, Green, Blue, Black	04KBG00003	13985
5	30 (7/38 TC)	0.058 [1.47]	0.330 [8.38]	None	Red, Green, Blue, Black, White	05KBE00005	13986
5	30 (7/38 TC)	0.058 [1.47]	0.350 [8.89]	Alum/Polyester + 85% TC Braid	Red, Green, Blue, Black, White	05KBG00002	13987

28 AWG Multi-Coaxial Cable



Product Specifications

- ▲ **Application:** R-G-B Video components with or without Sync(s) for TV/Display devices
- ▲ **Conductor:** 28 AWG 7/36 Tin Plated Copper
- ▲ **Insulation:** Foam Polyolefin
- ▲ **Coaxial Shield:** Tin Copper Braid 93% Coverage
- ▲ **Coaxial Jacket:** PVC 0.104 inch [2.64] diameter
- ▲ **Outer Jacket:** Gray PVC
- ▲ **UL Listing:** Type CL2 or AWM Style 20276
- ▲ **CSA Certification:** AWM II A/B FT1, or AWM II A/B FT4


28 AWG Coaxial Electrical Data

Impedance (Ohms)	75
Capacitance (pF/ft)	17
Attenuation (dB/ft)	
1 MHz	0.006
10 MHz	0.020
50 MHz	0.045
100 MHz	0.064
200 MHz	0.093
400 MHz	0.140
700 MHz	0.190
900 MHz	0.220
1000 MHz	0.240

Number of Coax	AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Colors	Part Number	Spec Number
3	28 (7/36 TC)	0.064 [1.63]	0.290 [7.37]	None	Red, Green, Blue	03KDE00001	13988
3	28 (7/36 TC)	0.064 [1.63]	0.315 [8.00]	Alum/Polyester + 85% TC Braid	Red, Green, Blue	03KDG00001	13989
5	28 (7/36 TC)	0.064 [1.63]	0.350 [8.89]	None	Red, Green, Blue, Black, White	05KDE00001	13990
5	28 (7/36 TC)	0.064 [1.63]	0.370 [9.40]	Alum/Polyester + 85% TC Braid	Red, Green, Blue, Black, White	05KDG00001	13992

Video Cable (Continued)

Composite VGA/SVGA Cable



Product Specifications

- ▲ **Application:** PC and Workstation Video Monitors
- ▲ **Conductor:**
 - 24 AWG 7/32 Tin Plated Copper
 - 28 AWG 7/36 Tin Plated Copper
 - 30 AWG 7/38 Tin Plated Copper
 - (as applicable)

- ▲ **Insulation:** Coax - foam Polyolefin, Conductor - PVC
- ▲ **Jacket:** Quarry Gray Striated PVC, Light Gray PVC
- ▲ **UL Listing:** Type CL2X or AWM Style 20276
- ▲ **CSA Certification:** AWM II A/B FT4, or AWM II A/B FT1


No. of Conductors		AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding		Color		Part Number	Spec Number
Total	Type				Coax	Overall	Coax	Conductor		
7	3 Coax 4 Cond.	28 (7/36 TC) 24 (7/32 TC)	0.062 [1.57] 0.038 [.97]	0.295 [7.49]	36AWG TC Spiral + Alum/Polyester	Alum/Polyester/Alum +80% TC Braid	Red Green Blue	White, Black Orange, Yellow	07ZZW00010	13979
10	3 Coax 7 Cond.	28 (7/36 TC) 24 (7/32 TC)	0.062 [1.57] 0.038 [.97]	0.295 [7.49]	36AWG TC Spiral + Alum/Polyester	Alum/Polyester/Alum +80% TC Braid	Red Green Blue	White, Black, Grey, Pink, Orange, Violet, Yellow	10ZZW00008	13980
13	3 Coax 5 Pair	30 (7/38 TC) 28 (7/36 TC)	0.058 [1.47] 0.035 [.89]	0.380 [9.65]	36AWG TC Braid	Alum/Polyester/Alum + 2 90% TC Braids	Red Green Blue	Black/Brown, Red/Orange, Yellow/Green, Blue/Violet, Gray/White	13ZZT00015	13981

Electrical Data

Conductors	Impedance (Ohms)	Capacitance (pF/ft)	Attenuation	
			Frequency MHz	dB/ft
7	75	17.5	1	0.006
			10	0.020
			50	0.044
			100	0.063
			300	0.114
			500	0.151
10	75	17.5	1	0.006
			10	0.020
			50	0.044
			100	0.063
			300	0.114
			500	0.151
13	75	18.5	1	0.008
			10	0.025
			50	0.056
			100	0.080
			300	0.147
			500	0.197

DFP (Digital Flat Panel) Interface Cable

Digital Flat Panel cables allow a host computer to connect directly to an external flat panel monitor without the need for analog-to-digital conversion.



Product Specifications


- ▲ Application: Digital Flat Panel Monitor Interconnect
- ▲ Jacket: Flexible PVC
- ▲ UL Listing: AWM Style 20276

Electrical Data

Impedance (Ohms)	100	
Capacitance (pF/ft)	14	
Attenuation (dB/ft)	Shielded Pairs	
	13ZBS00001	13ZDS00002
1 MHz	0.013	0.010
10 MHz	0.050	0.040
50 MHz	0.097	0.077
100 MHz	0.130	0.100
200 MHz	0.190	0.150
400 MHz	0.260	0.210
600 MHz	0.320	0.260
800 MHz	0.370	0.300

Number of Conductors		AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Part Number	Spec Number
Total	Type						
13	3 Singles	28 (7/36 TC)	0.027 [.69]	0.275 [6.99]	Alum/Polyester + 80% TC Braid	13ZDS00002	14949
	4 Pair (Shielded)	28 (7/36 TC)	0.040 [1.02]				
	1 Pair	28 (7/36 TC)	0.027 [.69]				
13	3 Singles	30 (7/38 TC)	0.024 [.61]	0.245 [6.22]	Alum/Polyester + 80% TC Braid	13ZBS00001	14887
	4 Pair (Shielded)	30 (7/38 TC)	0.032 [.81]				
	1 Pair	30 (7/38 TC)	0.024 [.61]				

DFP (Digital Flat Panel) Interface with USB Cable



Electrical Data

Impedance (Ohms)	100	
Capacitance (pF/ft)	14	
Attenuation (dB/ft)	Shielded Pairs 17ZBS00001	Shielded TMDs Pairs 17ZDS00001
1 MHz	0.013	0.010
10 MHz	0.050	0.040
50 MHz	0.097	0.077
100 MHz	0.130	0.100
200 MHz	0.190	0.150
400 MHz	0.260	0.210
600 MHz	0.320	0.260
800 MHz	0.370	0.300

Impedance (Ohms)	90
Attenuation (dB/cable)	Shielded USB Pairs
64 kHz	0.08
256 kHz	0.11
512 kHz	0.13
772 kHz	0.15
1 MHz	0.20
4 MHz	0.39
8 MHz	0.57
12 MHz	0.67
24 MHz	0.95
48 MHz	1.35
96 MHz	1.90


Number of Conductors		AWG Size	Insulation Diameter	Overall Cable Diameter	Shielding Overall	Part Number	Spec Number
Total	Type						
17	3 Singles	28 (7/36 TC)	0.027 [.69]	0.300 [7.62]	Alum/Polyester/Alum + 80% TC Braid	17ZDS00001	14979
	4 Pair (Shielded)	28 (7/36 TC)	0.040 [1.02]				
	1 Pair (Shielded)	28 (7/36 TC)	0.034 [.86]				
	2 Pair (Unshielded)	28 (7/36 TC)	0.027 [.69]				
17	3 Singles	30 (7/38 TC)	0.024 [.61]	0.260 [6.60]	Alum/Polyester/Alum + 80% TC Braid	17ZBS00001	14985
	5 Pair (Shielded)	30 (7/38 TC)	0.032 [.81]				
	2 Pair (Unshielded)	30 (7/38 TC)	0.024 [.61]				

Electronics

Video Cable (Continued)

Video Cables offer a variety of solutions to the demanding requirements needed to operate today's high speed workstations, video-conferencing, financial information systems equipment, and personal computers. These designs incorporate miniature coaxes, conductors, and/or pairs to satisfy demanding and unique applications, including the latest industry standards.

VESA-P&D-A Cable



Product Specifications


- ▲ **Application:** CRT and Flat Panel Video Monitors/ Displays and Video Projection Systems
- ▲ **Conductor:** 7 Strand Tin Plated Copper except as noted

- ▲ **Outer Shield:** Aluminum/Polyester Tape and Tin Copper Braid 90% Coverage
- ▲ **Jacket:** Parchment White PVC

- ▲ **UL Recognized:** UL AWM Style 20276
- ▲ **Compliant with Applicable Industry Standards/ Specifications for USB and IEEE 1394 as well as VESA.**

Total Number of Conductors	Functionality Supported	Overall Cable Diameter	Part Number	Spec Number
11	P&D-A Basic	0.270 [6.86]	11ZZS00005	15177
13	P&D-A Basic + USB	0.305 [7.75]	13ZZS00008	100-3550
14	P&D-A Basic + USB, Stereo Sync	0.305 [7.75]	14ZZS00011	100-3551
15	P&D-A Multimedia	0.310 [7.87]	15ZZS00002	100-3564
17	P&D-A Multimedia + USB	0.330 [8.38]	17ZZS00004	100-3641
20	P&D-A Basic + USB, Stereo Sync, IEEE 1394	0.340 [8.64]	20ZZS00004	100-3555
23	P&D-A Multimedia + USB, IEEE 1394	0.350 [8.89]	23ZZS00013	100-3648
27	P&D-A Full	0.415 [10.54]	27ZZS00001	13582

VESA-P&D-D Cable



Total Number of Conductors	Functionality Supported	Overall Cable Diameter	Part Number	Spec Number
14	P&D-D Basic + Charger	0.280 [7.11]	14ZZS00008	13765
16	P&D-D Basic, USB + Charger	0.310 [7.87]	16ZZS00006	13420
22	P&D-D Basic, USB, IEEE 1394 + Charger	0.325 [8.26]	22ZZS00005	15218
23	P&D-D Basic, USB, IEEE 1394 for Microribbon Connector	0.320 [8.13]	23ZZS00014	13602

Construction details and electrical performance data are listed by component on the following page.

Note: Refer to DVI and DFP, pages 28 and 32.

VESA-P&D-A and P&D-D Product Data

Construction Details By Component

Signal	Basic	Multi-Media	Full	Digital Monitor		Construction	Number of Conductors
				Basic	Full		
R-G-B	X	X	X			Coax - 30 AWG, Foam PP Insulation, Tin Copper Braided Shield, PVC Jacket	3
DDC Data/Clock	X	X	X	X	X	28 AWG, Polyethylene Insulation	2
DDC Power	X	X	X	X	X	28 AWG, PVC Insulation	2
H & V Sync	X	X	X			28 AWG, Polyethylene Insulation	3
Sense	X	X	X	X	X	28 AWG, Polyethylene Insulation	1
Stereo Audio		X	X			30 AWG, PE Insulation, Aluminum/Mylar Shield	4
IEEE 1394			X		X	30 AWG, Foam PP Insulation, Twisted Pair, Aluminum/Mylar Shield	4 (2 Pair)
						22 AWG, PVC, Ins., Twisted Pair	2
USB			X		X	30 AWG, Foam PP Insulation, Twisted Pair, Aluminum/Mylar Shield	2
Stereo Sync			X			28 AWG, Polyethylene Insulation	1
Pixel Clock			X			Same as R-G-B Video	1
Y/C Video			X			Same as R-G-B Video	2
TMDS				X	X	28 AWG, Foam PP Insulation, Twisted Pair, Aluminum/Mylar Shield	8 (4 Pair)

Electrical Performance By Component

Signal	Time Delay (ns/ft)	Impedance (Ohms)	Capacitance (pf/ft)	Attenuation	
				Frequency MHz	dB/ft
R-G-B Video Pixel Clock Y/C Video	1.30	75	18.0	1	0.0080
				10	0.0260
				50	0.0580
				100	0.0820
				200	0.1200
				400	0.1700
				700	0.2400
				900	0.2800
				1000	0.3000
				100	0.1400
IEEE 1394	1.43	110	12.8	200	0.1900
				400	0.3000
				0.064	0.0048
				0.256	0.0067
				0.512	0.0082
USB	1.43	90	15.5	0.772	0.0094
				1.0	0.0120
				4.0	0.0240
				8.0	0.0350
				10.0	0.0380
				16.0	0.0480
				1	0.0130
				10	0.0500
TMDS	1.43	100	14.0	50	0.0970
				100	0.1300
				200	0.1900
				400	0.2600
				600	0.3200
				800	0.3700

Theory and Application

The proper selection and application of cables requires a knowledge of factors not involved in other types of cables. The following paragraphs have been prepared to aid in the selection of proper coax cable:

Signal Integrity and Propagation

To explain how to maintain signal integrity, it is necessary to review how the signal is configured in a cable and how it propagates. Ignoring digital signals for this discussion we will identify the issues that deal with the integrity of a sine wave. Consider a coaxial cable consisting of an inner conductor surrounded by a dielectric material and then an outer conductor (See Figure 1). The outer conductor may be a braid, a foil, or a solid metal.

An electromagnetic wave traveling in a coaxial cable produces an electric and a magnetic field between the inner conductor and the outer conductor (Figure 2).

The electric (E field) is radial and varies in time. An alternating current flows along the inner conductor and the outer conductor. An oscillating magnetic field (H field) circles the inner conductor.

The alternating current on a conductor is not spread throughout the conductor but is strongest at the surface and decays exponentially at points further into the conductor. This is called the **skin effect**. At a frequency of 1MHz, three skin depths is 0.0078" (95% of the current is within three skin depths of the surface) and at 10GHz three skin depths is 0.00078". As a result, the current is on the outer surface of the inner conductor and the inner surface of the outer conductor over the entire range of interest for most RF systems. The dimensions and material beyond several skin depths have no effect on the wave; gold plated plastic will propagate as well as gold plated copper at sufficiently high frequencies.

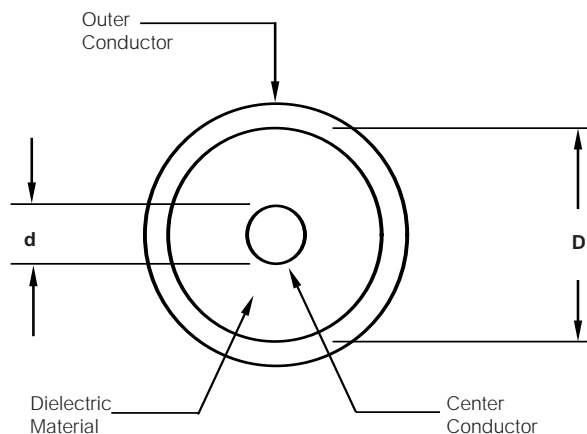


Figure 1

Diagram of a Cable

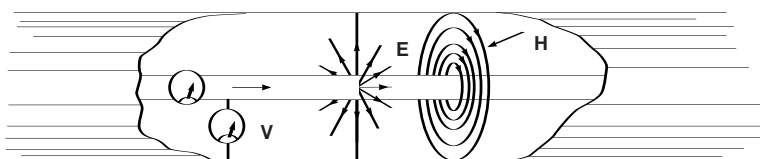


Figure 2

Electric field (E) and magnetic field (H)
belonging to the principal mode in a coaxial line.

Velocity of Propagation

When an electromagnetic wave travels in a medium other than air or vacuum, the **velocity** for the wave is reduced by a factor of the square root of the dielectric constant (ϵ) of the media. The velocity (v) of the propagation of a signal is given by:

$$v = \frac{c}{\sqrt{\epsilon}}$$

Where c is the speed of light, 3×10^8 m/sec or 1.18×10^{10} in/sec, and ϵ is the dielectric constant of the medium. (See Table 1 for dielectric constants of various materials)

The **wavelength** of a signal is given by the formula

$$\lambda = v/f = \frac{c}{\sqrt{\epsilon} \times f \text{ (GHz)}} = \frac{1.18 \times 10^{10}}{\sqrt{\epsilon} \times f \text{ (GHz)}} \text{ inches}$$

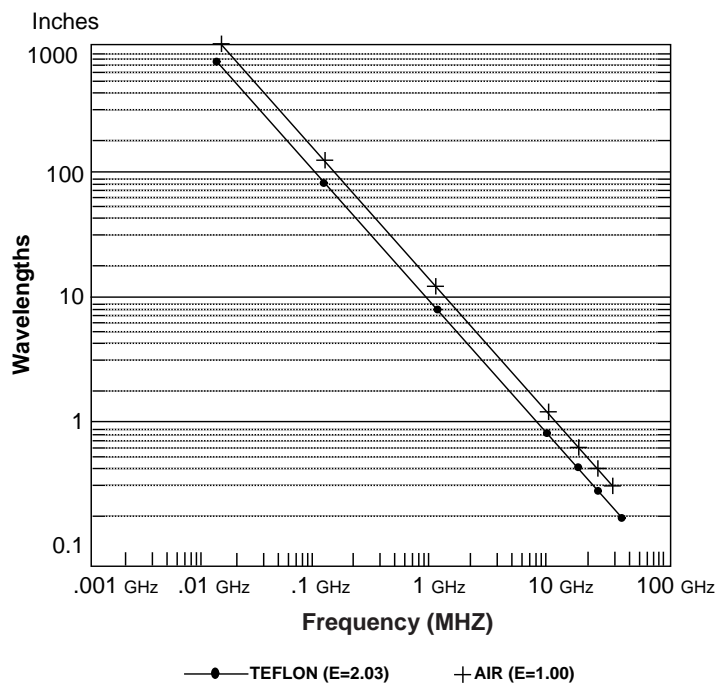


Figure 3

Table 1.
Properties of Insulating Materials

Dielectric Material	Dielectric Constant	Operating Temperature Range
TFE	2.03	-70 +250°C
Polyethylene	2.3	-60 +80°C
Nylon	4.6-4.0	-40 +120°C
Polypropylene	2.25	-40 +105°C

Attenuation

A wave loses energy (attenuates) in several ways: (1) The resistance of the inner and outer conductors is small but can be significant over long lengths and will produce some heat. (2) The dielectric may cause loss; it's resistance is high but not infinite, and some energy is lost. (3) Electromagnetic energy radiates at high frequencies; significant energy losses are caused by radiation of electromagnetic energy (the cable acts like an antenna). (4) Energy is reflected due to impedance mismatches or impedance discontinuities. The combination of these four types of losses are referred to as the **insertion loss** of a transmission line system.

Characteristic Impedance

A parameter which defines the behavior of a cable, connector, or any propagating system is **Characteristic Impedance**, Z_0 . The characteristic impedance of a lossless cable is related to the inductance per unit length, L , and the capacitance per unit length, C , as follows:

$$Z_0 = \sqrt{L/C} \text{ in ohms}$$

The equivalent circuit of a transmission line is shown in Figure 4. R represents the conductor resistance for a unit length.

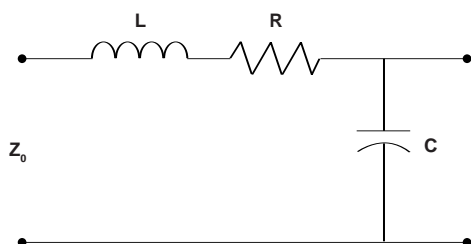


Figure 4

Typical Transmission Line Schematic

For a coaxial cable the characteristic impedance is given by:

$$Z_0 = \frac{138}{\sqrt{\epsilon}} \times \log_{10} \frac{D}{d} \text{ in ohms}$$

where "D" is the inner diameter of the outer conductor and "d" is the outer diameter of the inner conductor, respectively. Similar equations apply for other geometries such as two parallel wires.

As can be observed from this equation, the impedance is a function of the diameters. Generally the conductor diameter can be very accurately controlled, but the dielectric diameter can vary based on the accuracy of the process. If the impedance changes are a consistent spacing of one 1/4 wavelength, this can cause significant signal loss.

Reflections

When the characteristic impedance changes in a transmission line system, part of an incident wave is reflected. The reflection coefficient can be calculated as:

$$\text{Reflection Coefficient} = \rho = \frac{V_i}{V_R} = \frac{Z_R - Z_0}{Z_R + Z_0}$$

Where V_i and Z_0 are the incident voltage and impedance of the first media. V_R and Z_R represent the reflected voltage and impedance of the media that caused the reflection. The decibel loss due to reflection is given by:

$$\text{Return Loss} = 10 \log_{10} \left(\frac{1}{1 - \rho^2} \right) \text{ dB}$$

VSWR

The traditional way to determine the reflection coefficient is to measure the standing wave caused by the superposition of the incident wave and the reflected wave. Traditionally the voltage is measured at a series of points using a slotted line. The ratio of the maximum divided by the minimum is the Voltage Standing Wave Ratio (VSWR). The VSWR is infinite for total reflections because the minimum voltage is zero. If no reflection occurs the VSWR is 1.0. VSWR and reflection coefficient are related as follows:

$$\text{VSWR} = (1 + \rho)/(1 - \rho)$$

Present instrumentation measures the return loss.

Figure 5 represents the relationship between VSWR and its equivalent in return loss (expressed in dB).

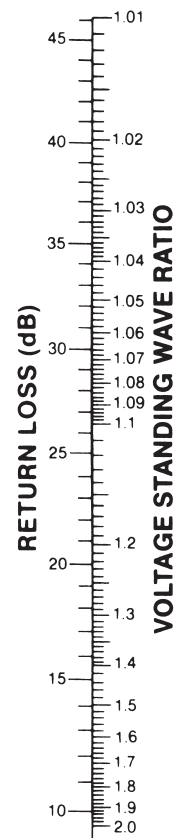


Figure 5

VSWR vs. Return Loss

Multiple Reflections

If there is a series of impedance changes, each one will cause a reflection. The total reflection is the vector addition of each of the individual coefficients accounting for the distance between discontinuities. Even though the calculations are difficult, a total VSWR can still be measured.

Electronics

Cable Design

Conductor - Materials/Construction:

Conductor Material:

The ability of a material to act as a conductor, semi-conductor or insulator is determined by that material's molecular structure.

Copper

Copper is by far the most versatile and the most widely used conductor material. It is also compatible with numerous coatings to enhance termination and retard corrosion. Annealed copper conductors provide better flex life than hard copper conductors.

Copper Clad Steel

Copper covered steel is utilized when greater strength than that of solid copper conductor is required and where some of the conductivity of solid copper can be sacrificed. Copper clad steel consists of a steel core with a concentric copper covering thoroughly bonded to it. The most widely used grades are:

High Strength - 40% Conductivity

High Strength - 30% Conductivity.

The above conductivity is expressed in terms of conductivity of a solid copper wire of equal diameter. Where greater flexibility is necessary, the annealed grade should be specified since it employs a soft steel core with the flexibility near that of copper but with twice the strength. High strength will be achieved by using the hard drawn form. In the applications of high frequency transmission, no loss of conductivity is evident from that of solid copper due to transmission along the copper surface (skin effect). However, at power frequencies, the conductivity is 30 or 40% that of copper wire.

High Strength Alloys

Greater breaking strength and flex life are achieved by alloying copper with cadmium chromium, cadmium, chromium and zirconium. With only a slight increase in resistivity compared with copper clad steel, these alloys allow size and weight reduction to be achieved in electronic and aerospace applications.

Cadmium Chromium copper provides the highest conductivity of the above four alloys and is suitable for high temperature application.

Copper Conductors:

Resistivity

All conductor materials possess resistance to pass electrical energy.

Ampacity

Ampacity (or current carrying capacity) is determined by a number of factors;

1. The maximum continuous thermal performance of the covering insulation,
2. By the heat generated in the cable (result of conductor and insulation losses) and
3. By the heat-dissipating properties of the cable and its environment.

Heat generated in a conductor varies as the square of the applied current. The factors influencing current carrying capacity are:

- * Conductivity of Conductor Material - The higher conductivity materials such as silver and copper possess higher current carrying capacity compared with alloys or aluminum hence generating less heat.
- * Conductor Size- Ampacity varies directly with conductor size and will increase as the diameter increases.
- * Insulation Material - The specific heat of the insulating material will determine its ability to conduct heat through the wall to the surrounding medium (air, water, etc.) In no case should the conductor temperature exceed the thermal rating of the insulation.
- * Surrounding Temperature - Ambient conditions such as a higher air temperature will reduce heat transfer away from the conductor.

Stranding

Stranded conductor constructions were developed as a means of overcoming the rigidity of solid wires. For any given wire size, the greater the number of strands with corresponding decrease in individual strand size, the more flexible and costly the conductor.

An increase in diameter must be associated with the use of stranded wires; resistance and weight are affected as well, depending on the number of strands and lay length used.

There are specific numbers of strands which lend themselves to round configurations, i.e., 7, 12, 19, 27 and 37. Normally beyond 37 strands, rope type constructions are utilized consisting of 7 or 19 strand groups.

Property	Annealed Copper	Copper Clad Steel (40% Conductivity)	High Strength Alloy 135
Density (gm/cm ³)	8.89	8.15	8.71
Resistivity (ohm-cm/ft)	10.37	26.45	11.30
Tensile Strength (psi)	35,000	110,000	60,000
Coating Available*	T S N	S	S N
Maximum Service Temp (°C)	150 200 260	200	200 200

*T-Tin S-Silver N-Nickel

Table 2 Conductor Data (Solid Copper)

AWG	Diameter			Cross Section Area		Weight		DCR @ 20°C Tinned Copper		DCR @ 20° Bare Copper		Break Strength	
	inches	mils	mm	circ. mils	sq. mm	lbs/Kft	Kg/Km	ohms/Kft	ohms/Km	ohms/Kft	ohms/Km	lbs. (max.)	Kg (max.)
36	0.0050	5.0	0.127	25.0	0.0127	0.0757	0.113	441	1447	415	1360	0.78	0.36
35	0.0056	5.6	0.142	31.4	0.0159	0.0949	0.141	350	1148	331	1080	0.99	0.45
34	0.0063	6.3	0.160	39.7	0.0201	0.1200	0.179	274	890	261	857	1.25	0.57
33	0.0071	7.1	0.180	50.4	0.0255	0.1530	0.228	215	705	206	675	1.57	0.71
32	0.0080	8.0	0.203	64.0	0.0324	0.1940	0.289	169	554	162	532	1.98	0.90
31	0.0089	8.9	0.226	79.2	0.0401	0.2400	0.357	136	446	131	430	2.50	1.14
30	0.0100	10.0	0.254	100	0.0507	0.3030	0.451	107	351	104	340	3.16	1.43
29	0.0113	11.3	0.287	128	0.0649	0.3870	0.576	83.9	275	81.2	266	3.98	1.81
28	0.0126	12.6	0.320	159	0.0806	0.4810	0.716	67.5	221	65.3	214	5.02	2.27
27	0.0142	14.2	0.361	202	0.1020	0.6100	0.908	53.1	174	51.4	169	6.33	2.87
26	0.0159	15.9	0.404	253	0.1280	0.7650	1.140	42.4	139	41.0	135	7.98	3.62
25	0.0179	17.9	0.455	320	0.1620	0.9700	1.440	33.4	109	32.4	106	10.07	4.55
24	0.0201	20.1	0.511	404	0.2050	1.2200	1.820	26.5	86.9	25.7	84.2	12.69	5.76
23	0.0226	22.6	0.574	511	0.2590	1.5500	2.310	20.9	68.6	20.3	66.6	15.41	6.99
22	0.0253	25.3	0.643	640	0.3240	1.9400	2.890	16.7	54.8	16.2	53.2	19.43	8.81
21	0.0285	28.5	0.724	812	0.4110	2.4600	3.660	13.1	42.9	12.8	41.9	24.50	11.11
20	0.0320	32.0	0.813	1020	0.5190	3.1000	4.610	10.5	34.4	10.1	33.2	30.89	14.01
19	0.0359	35.9	0.912	1290	0.6530	3.9000	5.800	8.31	27.3	8.05	26.4	38.95	17.67
18	0.0403	40.3	1.020	1620	0.8230	4.9200	7.320	6.59	21.6	6.39	21.0	49.12	22.28
17	0.0453	45.3	1.150	2050	1.0400	6.2300	9.240	5.22	17.1	5.05	16.6	61.93	28.09
16	0.0508	50.8	1.290	2580	1.3100	7.8100	11.600	4.15	13.6	4.02	13.2	78.10	35.43
15	0.0571	57.1	1.450	3260	1.6500	9.8700	14.700	3.29	10.8	3.18	10.4	98.48	44.67
14	0.0641	64.1	1.630	4110	2.0800	12.4000	18.500	2.61	8.56	2.52	8.28	124.2	56.34
13	0.0720	72.0	1.830	5180	2.6300	15.7000	23.400	2.07	6.79	2.00	6.56	156.6	71.03
12	0.0808	80.8	2.050	6530	3.3100	19.8000	29.500	1.64	5.38	1.59	5.21	197.5	89.58
11	0.0907	90.7	2.300	8230	4.1700	24.9000	37.100	1.30	4.27	1.26	4.14	249.0	112.9
10	0.1019	101.9	2.590	10380	5.2600	31.4000	46.800	1.03	3.38	0.99	3.28	314.0	142.4

Table 3 Conductor Data (Stranded Copper)


AWG	Stranding	Diameter		Cross-Section Area		Weight		DCR @ 20°C Tinned Copper		DCR @ 20°C Bare Copper	
		inches	mm	circ. mils	sq. mm	lbs/Kft	Kg/Km	ohms/Kft	ohms/km	ohms/Kft	ohms/km
32	7/40	0.0093	0.236	67	0.0434	0.203	0.302	171.0	561.0	165.7	543.6
30	7/38	0.0117	0.297	112	0.0723	0.339	0.504	100.6	330.1	98.0	321.5
30	19/42	0.0120	0.305	119	0.0766	0.366	0.546	98.0	321.5	94.9	311.4
29	7/37	0.0135	0.343	142	0.0915	0.429	0.638	78.7	258.2	76.6	251.3
28	7/36	0.0147	0.373	175	0.113	0.529	0.788	64.1	210.3	62.2	204.1
28	19/40	0.0147	0.373	183	0.118	0.563	0.839	63.6	208.7	61.7	202.4
27	7/35	0.0170	0.432	220	0.142	0.664	0.989	51.2	170.0	50.1	164.4
26	7/34	0.0190	0.483	278	0.179	0.840	1.25	39.8	130.6	38.8	127.3
26	10/36	0.0190	0.483	250	0.163	0.756	1.13	44.2	145.0	43.3	142.1
26	19/38	0.0190	0.483	304	0.196	0.956	1.42	36.9	121.1	36.0	118.1
26	26/40	0.0180	0.457	250	0.161	1.03	1.15	46.0	150.9	44.4	145.7
25	7/33	0.0210	0.533	353	0.228	1.07	1.59	31.2	102.4	30.7	100.7
24	7/32	0.0240	0.610	448	0.289	1.36	2.01	24.3	79.7	24.0	78.7
24	10/34	0.0220	0.559	397	0.256	1.20	1.79	27.8	91.2	27.1	88.9
24	16/36	0.0220	0.559	400	0.258	1.21	1.80	27.9	91.5	27.1	88.9
24	19/36	0.0240	0.610	475	0.306	1.47	2.18	23.4	76.8	23.2	76.1
24	41/140	0.0220	0.559	394	0.254	1.23	1.83	29.5	96.8	28.2	92.5

Table 3 Conductor Data (Stranded Copper) (continued)

AWG	Stranding	Diameter		Cross-Section Area		Weight		DCR @ 20°C Tinned Copper		DCR @ 20°C Bare Copper	
		inches	mm	circ. mils	sq. mm	lbs/Kft	Kg/Km	ohms/Kft	ohms/km	ohms/Kft	ohms/km
22	7/30	0.0300	0.762	700	0.452	2.11	3.15	15.4	50.5	15.4	50.5
22	16/34	0.0280	0.711	635	0.410	1.92	2.86	17.3	56.8	17.1	56.1
22	19/34	0.0300	0.762	754	0.487	2.32	3.46	14.9	48.9	14.3	46.9
22	26/36	0.0290	0.737	650	0.419	2.10	2.99	17.3	56.8	16.8	55.1
22	27/36	0.0290	0.737	675	0.435	2.08	3.1	16.8	55.1	16.1	52.8
22	66/40	0.0280	0.711	634	0.409	1.99	2.97	18.6	61.0	18.1	59.4
21	19/33	0.0345	0.876	958	0.618	2.96	4.4	11.6	38.1	11.3	37.1
20	7/28	0.0380	0.965	1111	0.717	3.36	5.01	9.8	32.2	9.6	31.5
20	10/30	0.0360	0.914	1000	0.645	3.02	4.5	10.8	35.4	10.9	35.8
20	19/32	0.0380	0.965	1216	0.785	3.75	5.59	9.2	30.2	8.9	29.1
20	26/34	0.0360	0.914	1032	0.666	3.20	4.77	10.7	35.1	10.5	34.4
20	41/36	0.0360	0.914	1025	0.661	3.19	4.76	11.0	36.1	10.8	35.4
20	42/36	0.0360	0.914	1050	0.677	3.27	4.87	10.8	35.4	10.4	34.1
20	7x38/44	0.0400	1.02	1064	0.686	3.35	4.98	11.2	36.7	11.1	36.4
19	24/32	0.0420	1.07	1536	0.991	4.77	7.1	7.1	23.3	7.0	22.9
18	7/0.0152	0.0455	1.16	1617	1.04	4.89	7.28	6.7	21.9	6.7	21.9
18	7/26	0.0480	1.154	1770	1.14	5.35	7.97	6.2	20.3	6.1	20.0
18	16/30	0.0450	1.143	1600	1.03	4.84	7.21	6.8	22.3	6.7	21.9
18	19/30	0.0480	1.219	1900	1.22	5.86	8.73	5.8	19.0	5.7	18.7
18	41/34	0.0440	1.118	1627	1.05	5.07	7.55	6.9	22.6	6.7	21.9
18	65/36	0.0440	1.118	1625	1.05	5.11	7.61	6.8	22.3	6.8	22.3
18	7x59/44	0.0530	1.346	1652	1.07	5.20	7.74	7.3	23.9	7.0	22.9
16	7/24	0.0600	1.524	2828	1.82	8.55	12.7	3.9	12.8	3.8	12.5
16	7/0.0192	0.0570	1.448	2580	1.66	7.81	11.6	4.3	14.1	4.2	13.8
16	19/29	0.0540	1.372	2426	1.57	7.49	11.1	4.5	14.8	4.4	14.4
16	19/0.0117	0.0560	1.422	2601	1.68	8.02	11.9	4.2	13.8	4.2	13.8
16	26/30	0.0570	1.448	2600	1.68	8.07	12.0	4.3	14.1	4.2	13.8
16	65/34	0.0570	1.448	2580	1.66	8.12	12.1	4.3	14.1	4.3	14.1
16	105/36	0.0570	1.448	2625	1.69	8.26	12.3	4.3	14.1	4.2	13.8
14	7/0.0242	0.0725	1.842	4099	2.64	12.4	18.5	2.7	8.86	2.7	8.86
14	7/22	0.0760	1.930	4481	2.89	13.6	20.2	2.5	8.20	2.6	8.53
14	19/27	0.0675	1.715	3831	2.47	12.1	17.9	2.8	9.19	2.6	8.53
14	19/0.0147	0.0710	1.803	4106	2.65	12.9	19.2	2.7	8.86	2.7	8.86
14	41/30	0.0700	1.778	4100	2.65	12.8	19.0	2.7	8.86	2.7	8.86
12	7/0.0305	0.0920	2.337	6512	4.20	19.7	29.3	1.7	5.58	1.7	5.58
12	19/25	0.0850	2.159	6088	3.93	18.8	28.0	1.8	5.91	1.8	5.91
12	19/0.0185	0.0880	2.235	6502	4.19	20.1	29.9	1.7	5.58	1.7	5.58
12	65/30	0.0890	2.261	6500	4.19	20.4	30.4	1.7	5.58	1.7	5.58
12	7x24/34	0.1000	2.540	6668	4.30	21.0	31.2	1.7	5.58	1.7	5.58
10	19/0.0234	0.1120	2.845	10404	6.71	32.1	47.8	1.1	3.61	1.1	3.61
10	37/26	0.1080	2.743	9354	6.03	29.0	43.2	1.2	3.94	1.2	3.94
10	105/30	0.1150	2.921	10500	6.77	33.0	49.2	1.1	3.61	1.0	3.28
8	19/0.0295	0.1380	3.505	16535	10.7	51.0	75.9	0.66	2.17	0.66	2.17
8	7x19/29	0.1600	4.064	16983	11.0	53.4	79.5	0.65	2.13	0.65	2.13
8	7x24/30	0.1620	4.115	16800	10.8	52.8	178.7	0.65	2.13	0.65	2.13
6	7x19/27	0.1990	5.055	26818	17.3	84.4	125.6	0.41	1.35	0.41	1.35
4	7x19/25	0.2500	6.350	42615	27.5	134.1	199.6	0.39	1.28	0.39	1.28
4	7x60/30	0.2520	6.400	42000	27.1	132.1	196.7	0.26	0.853	0.26	0.85


Strand Construction

Bunched - Conductor strands of any number twisted together in the same direction without regard to the geometric arrangement.

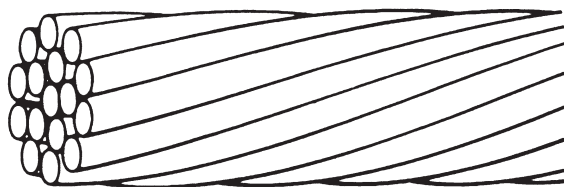

Bunch Stranding


True Concentric - A central wire surrounded by layers of helically laid wires. Each layer has reversed lay direction and an increasing lay length in each succeeding layer. The inner layer will support the outer layers to prevent migration of strand that can occur in bunch constructions.

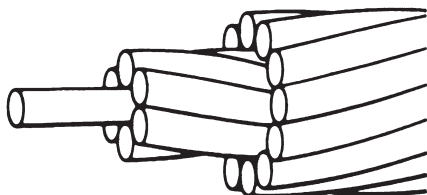

True Concentric and Equilay Stranding

Unidirectional Concentric - A central wire surrounded by one or more layers of helically laid wires with same direction of lay and increasing lay length in each succeeding layer. It has an advantage of much greater flexibility and flex life than true concentric.


Unilay - A multi-layer of helically laid wires with the same direction and same lay length for each layer.

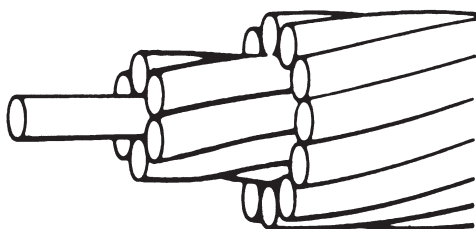

Unidirectional Concentric and Unilay Stranding

Equilay - Composed of multi-layers of helically laid wire, with the direction of lay reversed for succeeding layers. As the name designates, all layers have equal lay length.

Rope - Is cabled groups of any of the above stranded members. It is standard to use a number of groups that provide a round construction (7, 13, 19, 27). Rope lay is basically used for large gauge (No. 10 AWG and larger) constructions that consist of a central core stranded member surrounded by one or more layers of stranded members.

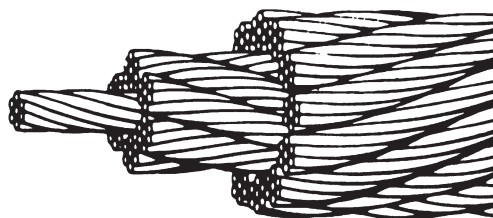

Rope Stranding

Conductor Coatings

Bare copper conductor will oxidize from exposure to the atmosphere forming copper oxide on the surface. Oxidation and other types of corrosion are accelerated by the presence of heat, moisture, and some insulating materials such as rubber. The oxide film is a poor conducting material and must be removed to assure a good, reliable terminal connection. To prevent corrosion and enhance terminating (soldering), bare copper is coated with a metal that is not susceptible to oxidation and corrosion. Contact resistance between conductors and terminals is reduced with coating materials like tin, silver and nickel.

Tin is the most frequently used coating; however, nickel and silver are used for specific applications.

Tin - The least expensive coating for ordinary usage is tin. It is a soldering aid and is specified when that type of terminating method is used.

Tinned Copper - Normally a film thickness of 20 micro-inches (.000020") is applied to each strand. The strands are twisted together to form the tinned copper conductor.

Heavy Tinned Copper - Carries a heavier tin thickness on the individual strand - 100 micro-inches on smaller than 30 AWG strands; 150 micro-inches on 30 AWG and larger.

Electronics

Cable Design (Continued)

Prefused Copper - Consists of twisted strands of heavy tinned copper fused with heat along the length.

Overcoated Copper - Consists of tinned strands of copper twisted together followed by a tin coating over the twisted conductor. The finished product is bonded along its entire length.

Topcoated Copper - Consists of bare copper strands twisted together, with the resulting conductor given a coating of tin. The finished product is bonded along its entire length.

Silver - Silver is primarily electroplated to copper and then drawn down to the proper conductor size with a resulting 40 micro-inch coating. Silver-coated conductors are reliable for continuous temperature application through 200°C. Although higher in cost than tinned copper, silver coated conductors have a lower resistance, than either tin or nickel coated conductors. At higher frequencies, the current density is at the conductor surface (skin effect) thereby making this highly conductive coating material the most effective of all coatings.

Nickel - Nickel plating is considered suitable for continuous service up to 260°C. At these elevated temperatures, nickel does not tarnish as does silver.

General Terms:

Thermoplastic: Materials that soften and flow when heated. Usually possess a definite melting point. The material will become firm again upon cooling. These materials can be molded and shaped with a heating and cooling process. (This process can be repeated.) Extrusion of melt flow polymers on wire is an example of this type of material.

Thermoset: Materials are soft and pliable during one stage of processing, can be molded and extruded at this state after which they are set or cured, usually at a higher temperature. After the setting process (cross linking) is complete they cannot be softened by reheating, hence heat and solvent resistance properties are improved over thermoplastic materials.

Insulation: Materials possessing good dielectric properties used on wire components in cable usually as direct covering on conductors.

Jacket: Materials that provide a protection in mechanical and chemical properties applied as a direct covering over cable components. The choice of materials for cable design to satisfy any given combination of installation and environmental conditions can often be more critical than the electrical requirements.

Insulation/Jacket

Introduction:

Based on the requirements the best insulating material for the application will be selected. The selection may involve examination of many different performance properties. The properties are addressed in the following sections and tables.

Insulation and Jacket Compound Properties*

Material	Max Operating Temp °C	Dielectric K @ 1Mhz	Specific Gravity	Oxygen Index
Vinyl (PVC)				
Plasticized (Conventional)	105	4-6	1.38	26-30
Semi Rigid	80	4.0	1.39	36
Irradiated	105	2.70	1.38	27
Polyethylene				
Low Density	80	2.28	0.92	18
High Density	80	2.34	0.95	18
Flame Retardant	80	2.35	1.0	27
Cellular (Foam)	80	1.55 ¹	0.50 ¹	18
Cross-Linked	90	2.44	1.19	27
Polypropylene				
Solid	90	2.30	0.91	18
Cellular (Foam)	90	1.50 ¹	0.50 ¹	18
Thermoplastic Elastomer	105	2.80	1.20	32
Teflon® FEP				
Solid	200	2.1	2.15	95
Cellular (Foam)	200	1.4 ¹	1.1 ¹	40
Teflon® PFA	250	2.1	2.15	30
Tefzel® ETFE	150	2.6	1.7	30
Kynar® PVDF	135	6.4	1.76	44
Halar® ECTFE	150	2.56	1.7	30
Nylon	105	4-8	1.13	22
Mylar (Polyester)	150	3.0	1.40	20
Polyurethane	80	—	1.13	20-29
Solef® PVDF	150	—	1.78	40

* Nominal Values

¹ Properties based on expansion level

General Properties of Insulation Compounds

The primary insulation material is the most important of the cable materials for overall performance reasons.

- ▲ Voltage dielectric for higher voltage charge at the conductor surface.
- ▲ Low loss material for higher frequency signal cables.
- ▲ Heat resistance in high temperature environments.
- ▲ Low temperature flexibility.
- ▲ Toughness for cut-through, abrasion and crush resistance.

Insulation compounds serve an electrical function first. Secondary properties consider the environmental factors.

Polyvinyl Chloride (PVC): This material is available in many formulations tailored to meet specific needs. Madison provides two (2) basic types:

Plasticized flexible materials for 80°, 90°, and 105°C applications.

Semi-rigid compounds rated at 80°C that can be made as thin wall products (8-9 mils).

PVC compounds are moderately good dielectric materials. Depending on the formulation, the dielectric constant can vary from 3 to 6. Formulations typically include the PVC resin, plasticizer, stabilizer, flame retardants, fillers, and specialty additives.

PVC compounds are limited to 105°C temperature applications and a cold environment of -40°C. Plasticizers can migrate from the compound causing the material to become brittle, especially at lower temperatures.

Typical Properties of Madison PVC Insulations

Property	Flexible*	Semi-Rigid
Physical		
Specific Gravity	1.30-1.40	1.5
Durometer (Hardness)	90 Shore A	63 Shore D
Tensile Strength (psi)	1500	3500
Elongation (%)	150-300	200
Max. Opr. Temperature (°C)	60-105	80
Oxygen Index	25-30	30
Solder Iron Resistance	Poor	Poor to Fair
Cut-through	Poor to Fair	Good
Electrical		
Dielectric Constant	4-6	3.0-3.5
Volume Resistivity (Ω-cm)	10 ¹¹ -10 ¹²	10 ¹⁴
Dielectric Strength (Volts/Mil)	300-600	700
Insulation Resistance (Megohm - 1000 ft.)	500-2000	5000

* Properties vary depending on compound design.

Polyolefins

Polyolefins are made up of a family of hydrocarbons similar in nature to paraffin oils and waxes. Over the past few decades they have been the most common of insulation materials because of a number of superior characteristics, low cost and availability.

Polyethylene: It is specified by general classifications of density (low, medium, and high). Combined high performance of electrical and physical properties have made this versatile polymer widely accepted.

Electrical performance of polyethylene is excellent. Dielectric quality is known by a high dielectric strength (volts per mil), low dielectric constant, low dissipation factor and high insulation resistance. These properties are stable over a broad range of frequencies and temperature.

Physical properties of polyethylene are generally considered good except for fire resistance and ultra-violet resistance (weatherability). Modifiers are used to tailor specific improvements in these areas.

Electronics

Cable Design (Continued)

Polypropylene: This polyolefin material is characteristic in many ways to high density polyethylene; electrical and chemical resistance are similar. It has superior physical properties such as abrasion, cut through, and heat resistance; however, it has a lower density. It is flammable, but flame retardant grades can be made available. It is preferred to polyethylene for stress crack resistance applications. Much of polypropylene is used in telecommunication cables for physical and dielectric quality.

Cellular Polyolefin: Dielectric improvements in capacitance within insulations are provided by production of a cellular

structure in the finished insulation. Processes of producing an inert gas in the polymer melt are controlled in the extruder and the resulting extrudate can be provided with a variation in the amount of voids (air to solid regions). This allows control over the dielectric constant and dissipation factor. Polyolefin dielectric constant (typically 2.27) can be lowered to 1.55 by expansion.

Flame Retardant Polyethylene: Compounds of polyethylene employing fire retardant additives are available, but there is some sacrificing of properties to consider when designing these materials into electrical wire applications.

Typical Properties of Madison Polyolefin Insulations

Property	Low Density	High Density	Flame Retardant	Polypropylene	Cellular (1)
Physical					
Density	.92	.95	1.0	.90	.45-.80
Tensile Strength (psi)	2000	3000	2000	3000	600-1000
Elongation (%)	300	500	300	500	100-200
Max. Opr. Temp (°C)	80	80	80	80	80
Low Temp. Brittleness (°C)	-65	-76	-20	-40	-65
Solder Iron	Poor	Poor	Poor	Poor	Poor
Abrasion Resistance	Good	Good	Fair	Good	Poor
Flame Resistance	Poor	Poor	Good	Poor	Poor
Electrical					
Dielectric Constant	2.28	2.34	2.35	2.27	1.45-1.75
Dissipation Factor	.0002	.0001	.001	.0003	.0002
Insulation Resistance (Megohm-1000 ft.)	20000	20000	10000	20000	1000
Dielectric Strength (Volts/Mil)	800	1000	800	1000	200-500

(1)-properties vary with amount of expansion

Non Halogen Compounds:

Over the past few years, non halogen, flame retardant, reduced emissions compounds have been developed in response to a growing demand for products which offer greater protection against fatalities, injuries and property damage from fire. When burned, cables made with non-halogen flame retardant compounds give off as little as one-quarter the smoke and fumes of conventional cable materials. These compounds have good crush and deformation resistance, good flexibility, excellent long term aging properties plus physical integrity at low temperatures.

Fluorocarbons

There are a number of fluorocarbon resins available as insulating materials. Each fluorocarbon type is distinctly different, however they all can be classified as highly fire resistant and physically and electrically stable at elevated temperature.

FEP: FEP has a service temperature of 200°C with excellent electrical properties - dielectric constant (2.1) and dissipation factor (.001) that is consistent through its maximum operating temperature and frequency range.

Low temperature properties of FEP are similar to those of TFE resulting in a -65°C rating. FEP insulated wire can be supplied in long continuous lengths allowing it to service a wider range of applications. FEP cannot be used in applications where thermosetting quantities are required (solder iron or short term overload). Along with the inherent flame resistance, this material is widely used in plenum cable applications because it produces low smoke in fire events.

PFA: PFA has a 260°C temperature rating, therefore it is an excellent choice for wiring requiring TFE properties and long lengths.

ETFE (Tefzel®): For application where properties of FEP are needed, with better chemical resistance.

ECTFE (Halar®): This material is slightly different from ETFE in chemical resistance, cross-linking ability, electrical, physical and thermal properties.

Like FEP and TFE, ECTFE is not useful where corona conditions prevail as in high voltage applications. As with other resins, irradiation cross-linking improves stress crack resistance. ECTFE ranks among the most radiation resistant polymers comparing with ETFE and polyethylene in this property.

PVDF (Kynar®): This material is rated for continuous use over a temperature range of -65° to 125°C. It has good resistance to corrosive chemical and organic solvents. Although this material is very hard with high tensile strength, abrasion resistance and excellent cut-through, limitations of flexibility are evident. It is resistant to creep and fatigue. It can be used in exterior applications because it is stable in sunlight and other sources of UV radiation.

Typical Properties of Madison Fluorocarbon Insulations

Type Property	FEP	PFA	ETFE Trade Name TEFZEL®	ECTFE Trade Name HALAR®	PVDF Trade Name KYNAR®	PVDF Trade Name SOLEF®	Foam TEFLON® FLUORO-CARBON
Specific Gravity	2.15	2.15	1.70	1.68	1.76	1.75	1.10-1.40
Tensile Strength (psi)	2500	2500	6500	4500	4500	4500	700-1400
Elongation (%)	250	250	150	150	150	150	100-150
Hardness	D55	D60	D75	D75	D75	D75	—
Temperature Rating (°C)	200	260	150	150	125	150	200
Low Temperature (°C)	-65	-65	-65	-75	-65	-35	-65
Flame Resistance (VW-1)	Pass	Pass	Pass	Pass	Pass	Pass	Pass
Dielectric Constant	2.1	2.1	2.6	2.6	9.7	9.6	1.3-1.7
Dissipation Factor	.001	.002	.005	.003	.019	—	.0003
Volume Resistivity (Ω-cm)	>10 ¹⁸	>10 ¹⁸	>10 ¹⁶	>10 ¹⁵	>10 ⁷	>10 ¹⁴	—
Applications	Coaxial Cable Plenum Cable Heater Cable Computer Cable	High Temp Wire Heater Wire Geophysical Fiber Optic Jacket	Nuclear Control Cable Aircraft Wire Computer Back Panel Rapid Transit	Nuclear Control Cable Oil-well Insul. Computer Wire Rapid Transit	Computer Back Panel Plenum Jacket Cathodic Protection Cable	Plenum Jacket	Data Transmission Plenum Coax

TEFZEL and TEFLON are trademarks of
E. I. du Pont de Nemours & Company

Electronics

Cable Design (Continued)

Electrical properties of PVDF are not as good as other fluoropolymers. Most common use of this material is for jackets and back panel wire where electrical performance is not critical. PVDF is highly flame resistant and low smoke producing finding wide use as plenum cable jackets.

Foam Fluorocarbons: To further improve on the superb properties of Teflon® FEP, processes have been developed to foam the FEP, resulting in lower dielectric material. These materials are increasingly used in plenum applications. They produce little smoke and minimize dripping and fire propagation.

Jacket Compounds

Jacket or sheaths over multicomponent cable or single components act as a protective covering as well as contain the component elements and shields. Jackets can be made semiconductive, depending on the application. Jacket materials are called upon to be flame resistant, physically tough, flexible, chemically resistant and to have a good appearance.

Types

PVC: Is the most widely used non-plenum jacket. A variety of compounds are available to serve a wide range of applications. Fire safety is an important role served by PVC jackets.

Polyurethane: A material used for severe service of abrasion and cut-through with flexibility. A range of grades are available to meet various applications, such as extreme low temperatures.

Polyethylene: Inherent properties make it ideal for direct burial applications.

Thermoplastic Elastomer (TPE): A suitable replacement to rubber where the thermosetting properties of rubber are not critical.

Fluorocarbon: Physical toughness and fire resistant characteristics override the slight increase in cost. See description of benefits in the section on dielectric material.

Typical Properties of Madison Jacket Compounds

Property	TPE Thermoplastic Elastomer	Nylon Polyamide	PU Polyurethane	PVC Polyvinyl Chloride*	PE Polyethylene	Fluorocarbon**	Non-Halogen	PVC Alloy
Tensile Strength (psi)	1700	6500	5000	1500-3000	3000	3500	1200-2000	2500
Elongation (%)	450	250	500	200	500	150	150-200	200
Operating Temperature								
High (°C)	125	105	80	80-105	80	125	90	75
Low (°C)	-50	-40	-50	-25	-40	-40	-40	0
Oil Aging ASTM No. 2 (Days/°C)	7/60	—	30/15.6	7/60	—	—	—	—
Tear Strength								
Die C (lb./in.)	380	—	290	—	450	—	—	—
Specific Gravity	1.20	1.13	1.20	1.25-1.40	0.93	1.76	1.3-1.6	1.6
Shore Hardness	A95	D85	A82	A70-A95	D45	D65	A80 - A95	C83
Fire Resistance-								
Oxygen Index	30*	23	30*	25-35	18	44	35-48	47
Dielectric Strength (Volts/mil)	500	450	400	450	500	500	500	500
Volume Resistivity (Ω-cm)	2 x 10 ¹⁶	10 ¹²	2 x 10 ¹¹	10 ¹⁴	2 x 10 ¹⁶	10 ¹⁴	10 ¹²	10 ¹²
Applications	-Appliance Wire -Coiled Cord -Arctic	-THHN/THWN -Jackets for Small Cables -Industrial Control Cable	-Camera Cable -Military Cable -Fiber Optics -coil cord	-Computer Cable -Coaxial Cable	-Direct Burial -Control Cable	-Plenum Cable -Control Cable	-Data Processing Cable -Industrial Cable -Transit Cable	-Plenum Cable

Note: *Varies with formulation **Based upon Copolymer — Data Not Available

TEFLON is a trademark of E. I. du Pont de Nemours & Company

Shields

The increasing number of high frequency interference sources has emphasized the necessity for shielding in electronic equipment. Shields, are used for EMI and RFI protection.

If a shield is required, the end user has a choice among several options - braided copper wire; spiral (served) copper wire; copper and aluminum tapes; laminates of aluminum/polyester and aluminum/polyester/aluminum with spiral drain wires for ease of termination; semi-conductive plastics.

The most effective for high frequency applications is a braided copper shield. For the majority of audio frequency applications (20 to 20,000 Hz) a coverage of 75% to 85% will prove effective, but for the high frequency range (3 to 30 MHz) a coverage of 85% to 95% will be necessary to give adequate protection.

The most economical shield is an aluminum polyester laminated tape used in conjunction with a drain wire applied either spirally or longitudinally, directly adjacent to the aluminum side of the tape. For frequencies up to 400 MHz it is as effective as a braid copper shield since it provides 100% coverage.

Cables

Cabling of individual layers may be either concentric or bunched. The **concentric** lay-up consists of a central wire or filler surrounded by one or more layers of helically laid wires, with the direction of lay reversed for successive layers and with the length of lay increasing for each successive layer. The direction of lay of the outer layer is generally left-hand. This construction assures cable roundness and greater mechanical strength. A **bunched** or **unilay** cable lay-up consists of any number of insulated wires cabled together in the same direction. It results in a smaller overall cable diameter, lighter weight, and has greater flexibility than concentric lay-ups.

Flexibility of a cable is directly related to the lay length of the individual layers. Usually this is 8 to 16 times the pitch diameter of each layer; the smaller the lay length, the greater the flexibility of the cable.

Fillers, are used to round out a cable and obtain symmetry.

Binders and Servers, sometimes needed (depending on construction) to prevent flaring or untwisting of components.

Tapes are frequently placed under the outer jacket as an added protection against mechanical abuse, and between overall shields and underlying conductors to prevent physical damage to the insulation.

Electronics

Color Chart

Multi-Conductor Cables

Table A

Number of Conductors	Base Color	1st Stripe/ Bandmark	2nd Stripe/ Bandmark
1	Black		
2	Brown		
3	Red		
4	Orange		
5	Yellow		
6	Green		
7	Blue		
8	Violet		
9	Gray		
10	White		
11	White	Black	
12	White	Brown	
13	White	Red	
14	White	Orange	
15	White	Yellow	
16	White	Green	
17	White	Blue	
18	White	Violet	
19	White	Gray	
20	White	Black	Brown
21	White	Black	Red
22	White	Black	Orange
23	White	Black	Yellow
24	White	Black	Green
25	White	Black	Blue
26	White	Black	Violet
27	White	Black	Gray
28	White	Brown	Red
29	White	Brown	Orange
30	White	Brown	Yellow
31	White	Brown	Green
32	White	Brown	Blue
33	White	Brown	Violet
34	White	Brown	Gray
35	White	Red	Orange
36	White	Red	Yellow
37	White	Red	Green
38	White	Red	Blue
39	White	Red	Violet
40	White	Red	Gray
41	White	Orange	Yellow
42	White	Orange	Green
43	White	Orange	Blue
44	White	Orange	Violet
45	White	Orange	Gray
46	White	Yellow	Green
47	White	Yellow	Blue
48	White	Yellow	Violet
49	White	Yellow	Gray
50	White	Green	Blue
51	White	Green	Violet
52	White	Green	Gray
53	White	Blue	Violet
54	White	Blue	Gray
55	White	Violet	Gray

Table B

Number of Conductors	Base Color	1st Stripe/ Bandmark	2nd Stripe/ Bandmark
1	Black		
2	Red		
3	White		
4	Green		
5	Orange		
6	Blue		
7	Brown		
8	Yellow		
9	Violet		
10	Gray		
11	Pink		
12	Tan		
13	Red	Green	
14	Red	Yellow	
15	Red	Black	
16	White	Black	
17	White	Red	
18	White	Green	
19	White	Yellow	
20	White	Blue	
21	White	Brown	
22	White	Orange	
23	White	Gray	
24	White	Violet	
25	White	Black	Red
26	White	Black	Green
27	White	Black	Yellow
28	White	Black	Blue
29	White	Black	Brown
30	White	Black	Orange
31	White	Black	Gray
32	White	Black	Violet
33	White	Black	Black
34	White	Red	Black
35	White	Red	Red
36	White	Red	Green
37	White	Red	Blue
38	White	Red	Brown
39	White	Red	Violet
40	White	Green	Black
41	White	Green	Red
42	White	Green	Green
43	White	Green	Blue
44	White	Green	Brown
45	White	Green	Violet
46	White	Blue	Black
47	White	Blue	Red
48	White	Blue	Green
49	White	Blue	Blue
50	White	Blue	Brown
51	White	Blue	Violet
52	White	Brown	Black
53	White	Brown	Red
54	White	Brown	Green
55	White	Brown	Blue
56	White	Brown	Brown
57	White	Brown	Violet
58	White	Violet	Red
59	White	Violet	Green
60	White	Violet	Blue

Multi-Pair Cables

Table C

Pair Number	Color Combination
1	Black paired with Red
2	Black paired with White
3	Black paired with Green
4	Black paired with Blue
5	Black paired with Yellow
6	Black paired with Brown
7	Black paired with Orange
8	Red paired with White
9	Red paired with Green
10	Red paired with Blue
11	Red paired with yellow
12	Red paired with Brown
13	Red paired with Orange
14	Green paired with White
15	Green paired with Blue
16	Green paired with Yellow
17	Green paired with Brown
18	Green paired with Orange
19	White paired with Blue
20	White paired with Yellow
21	White paired with Brown
22	White paired with Orange
23	Blue paired with Yellow
24	Blue paired with Brown
25	Blue paired with Orange
26	Brown paired with Yellow
27	Brown paired with Orange
28	Orange paired with Yellow
29	Violet paired with Orange
30	Violet paired with Red
31	Violet paired with White
32	Violet paired with Green
33	Violet paired with Blue
34	Violet paired with Yellow
35	Violet paired with Brown
36	Violet paired with Black
37	Gray paired with White

Electronics

Color Chart (Continued)

Multi-Pair Cables (Continued)

Table D

Pair Number	Color Combination
1	White paired with Black
2	White paired with Brown
3	White paired with Red
4	White paired with Orange
5	White paired with Yellow
6	White paired with Green
7	White paired with Blue
8	White paired with Violet
9	White paired with Gray
10	Black paired with Brown
11	Black paired with Red
12	Black paired with Orange
13	Black paired with Yellow
14	Black paired with Green
15	Black paired with Blue
16	Black paired with Violet
17	Black paired with Gray
18	Brown paired with Red
19	Brown paired with Orange
20	Brown paired with Yellow
21	Brown paired with Green
22	Brown paired with Blue
23	Brown paired with Violet
24	Brown paired with Gray
25	Red paired with Orange
26	Red paired with Yellow
27	Red paired with Green
28	Red paired with Blue
29	Red paired with Violet
30	Red paired with Gray
31	Orange paired with Yellow
32	Orange paired with Green
33	Orange paired with Blue
34	Orange paired with Violet
35	Orange paired with Gray
36	Yellow paired with Green
37	Yellow paired with Blue
38	Yellow paired with Violet
39	Yellow paired with Gray
40	Green paired with Blue
41	Green paired with Violet
42	Green paired with Gray
43	Blue paired with Violet
44	Blue paired with Gray
45	Violet paired with Gray
46	White/Black paired with Black
47	White/Black paired with Brown
48	White/Black paired with Red
49	White/Black paired with Orange
50	White/Black paired with Yellow
51	White/Black paired with Green
52	White/Black paired with Blue
53	White/Black paired with Violet
54	White/Black paired with Gray
55	White/Brown paired with Black
56	White/Brown paired with Brown
57	White/Brown paired with Red
58	White/Brown paired with Orange
59	White/Brown paired with Yellow

Table D (continued)

Pair Number	Color Combination
60	White/Brown paired with Green
61	White/Brown paired with Blue
62	White/Brown paired with Violet
63	White/Red paired with Gray
64	White/Red paired with Black
65	White/Red paired with Brown
66	White/Red paired with Red
67	White/Red paired with Orange
68	White/Red paired with Yellow
69	White/Red paired with Green
70	White/Red paired with Blue
71	White/Red paired with Violet
72	White/Red paired with Gray
73	White/Orange paired with Black
74	White/Orange paired with Brown
75	White/Orange paired with Red
76	White/Orange paired with Orange
77	White/Orange paired with Yellow
78	White/Orange paired with Green
79	White/Orange paired with Blue
80	White/Orange paired with Violet
81	White/Orange paired with Gray
82	White/Yellow paired with Black
83	White/Yellow paired with Brown
84	White/Yellow paired with Red
85	White/Yellow paired with Orange
86	White/Yellow paired with Yellow
87	White/Yellow paired with Green
88	White/Yellow paired with Blue
89	White/Yellow paired with Violet
90	White/Yellow paired with Gray
91	White/Green paired with Black
92	White/Green paired with Brown
93	White/Green paired with Red
94	White/Green paired with Orange
95	White/Green paired with Yellow
96	White/Green paired with Green
97	White/Green paired with Blue
98	White/Green paired with Violet
99	White/Green paired with Gray

Table E

Pair Number	Color Combination
1	Black paired with White
2	Red paired with Green
3	Brown paired with Blue
4	Orange paired with Yellow
5	Violet paired with Gray
6	Tan paired with Pink
7	White/Blue paired with Blue/White
8	White/Brown paired with Brown/White
9	White/Orange paired with Orange/White
10	White/Green paired with Green/White
11	White/Red paired with Red/White
12	White/Black paired with Black/White
13	White/Gray paired with Gray/White
14	Red/Blue paired with Blue/Red
15	Red/Orange paired with Orange/Red
16	Red/Green paired with Green/Red
17	Red/Brown paired with Brown/Red
18	Red/Gray paired with Gray/Red
19	Black/Blue paired with Blue/Black
20	Black/Orange paired with Orange/Black
21	Black/Green paired with Green/Black
22	Black/Brown paired with Brown/Black
23	Black/Gray paired with Gray/Black
24	Yellow/Blue paired with Blue/Yellow
25	Yellow/Orange paired with Orange/Yellow

*Single conductor - Green/Yellow

Electronics

Color Chart (Continued)

Multi-Pair Cables (Continued)

Table F

Pair Number	Color Combination
1	White/Black paired with Black/White
2	White/Brown paired with Brown/White
3	White/Red paired with Red/White
4	White/Orange paired with Orange/White
5	White/Yellow paired with Yellow/White
6	White/Green paired with Green/White
7	White/Blue paired with Blue/White
8	White/Violet paired with Violet/White
9	White/Gray paired with Gray/White
10	Black/Brown paired with Brown/Black
11	Black/Red paired with Red/Black
12	Black/Orange paired with Orange/Black
13	Black/Yellow paired with Yellow/Black
14	Black/Green paired with Green/Black
15	Black/Blue paired with Blue/Black
16	Black/Violet paired with Violet/Black
17	Black/Gray paired with Gray/Black
18	Brown/Red paired with Red/Brown
19	Brown/Orange paired with Orange/Brown
20	Brown/Yellow paired with Yellow/Brown
21	Brown/Green paired with Green/Brown
22	Brown/Blue paired with Blue/Brown
23	Brown/Violet paired with Violet/Brown
24	Brown/Gray paired with Gray/Brown
25	Red/Orange paired with Orange/Red
26	Red/Yellow paired with Yellow/Red
27	Red/Green paired with Green/Red
28	Red/Blue paired with Blue/Red
29	Red/Violet paired with Violet/Red
30	Red/Gray paired with Gray/Red
31	Orange/Yellow paired with Yellow/Orange
32	Orange/Green paired with Green/Orange
33	Orange/Blue paired with Blue/Orange
34	Orange/Violet paired with Violet/Orange
35	Orange/Gray paired with Gray/Orange
36	Yellow/Green paired with Green/Yellow
37	Yellow/Blue paired with Blue/Yellow
38	Yellow/Violet paired with Violet/Yellow
39	Yellow/Gray paired with Gray/Yellow
40	Green/Blue paired with Blue/Green
41	Green/Violet paired with Violet/Green
42	Green/Gray paired with Gray/Green
43	Blue/Violet paired with Violet/Blue
44	Blue/Gray paired with Gray/Blue
45	Violet/Gray paired with Gray/Violet

Table G

Pair Number	Color Combination
1	White/Tan paired with Tan/White
2	White/Brown paired with Brown/White
3	White/Pink paired with Pink/White
4	White/Orange paired with Orange/White
5	White/Yellow paired with Yellow/White
6	White/Green paired with Green/White
7	White/Blue paired with Blue/White
8	White/Violet paired with Violet/White
9	White/Gray paired with Gray/White
10	Tan/Brown paired with Brown/Tan
11	Tan/Pink paired with Pink/Tan
12	Tan/Orange paired with Orange/Tan

Table G (continued)

13	Tan/Yellow paired with Yellow/Tan
14	Tan/Green paired with Green/Tan
15	Tan/Blue paired with Blue/Tan
16	Tan/Violet paired with Violet/Tan
17	Tan/Gray paired with Gray/Tan
18	Brown/Pink paired with Pink/Brown
19	Brown/Orange paired with Orange/Brown
20	Brown/Yellow paired with Yellow/Brown
21	Brown/Green paired with Green/Brown
22	Brown/Blue paired with Blue/Brown
23	Brown/Violet paired with Violet/Brown
24	Brown/Gray paired with Gray/Brown
25	Pink/Orange paired with Orange/Pink
26	Pink/Yellow paired with Yellow/Pink
27	Pink/Green paired with Green/Pink
28	Pink/Blue paired with Blue/Pink
29	Pink/Violet paired with Violet/Pink
30	Pink/Gray paired with Gray/Pink
31	Orange/Yellow paired with Yellow/Orange
32	Orange/Green paired with Green/Orange
33	Orange/Blue paired with Blue/Orange
34	Orange/Violet paired with Violet/Orange
35	Orange/Gray paired with Gray/Orange
36	Yellow/Green paired with Green/Yellow
37	Yellow/Blue paired with Blue/Yellow
38	Yellow/Violet paired with Violet/Yellow
39	Yellow/Gray paired with Gray/Yellow
40	Green/Blue paired with Blue/Green
41	Green/Violet paired with Violet/Green
42	Green/Gray paired with Gray/Green
43	Blue/Violet paired with Violet/Blue
44	Blue/Gray paired with Gray/Blue
45	Violet/Gray paired with Gray/Violet
46	Aqua/Tan paired with Tan/Black
47	Aqua/Brown paired with Brown/Black
48	Aqua/Pink paired with Pink/Black
49	Aqua/Orange paired with Orange/Black
50	Aqua/Yellow paired with Yellow/Black
51	Aqua/Green paired with Green/Black
52	Aqua/Blue paired with Blue/Black
53	Aqua/Violet paired with Violet/Black
54	Aqua/Gray paired with Gray/Black
55	Aqua/White paired with White/Black
56	White paired with Tan
57	Gray paired with Brown
58	Blue paired with Pink
59	Violet paired with Orange
60	Green paired with Yellow

Table H

Pair Number	Color Combination
1	White/Blue paired with Blue/White
2	White/Orange paired with Orange/White
3	White/Green paired with Green/White
4	White/Brown paired with Brown/White
5	White/Gray paired with Gray/White
6	Red/Blue paired with Blue/Red
7	Red/Orange paired with Orange/Red
8	Red/Green paired with Green/Red

Table H (continued)

9	Red/Brown paired with Brown/Red
10	Red/Gray paired with Gray/Red
11	Black/Blue paired with Blue/Black
12	Black/Orange paired with Orange/Black
13	Black/Green paired with Green/Black
14	Black/Brown paired with Brown/Black
15	Black/Gray paired with Gray/Black
16	Yellow/Blue paired with Blue/Yellow
17	Yellow/Orange paired with Orange/Yellow
18	Yellow/Green paired with Green/Yellow
19	Yellow/Brown paired with Brown/Yellow
20	Yellow/Gray paired with Gray/Yellow
21	Violet/Blue paired with Blue/Violet
22	Violet/Orange paired with Orange/Violet
23	Violet/Green paired with Green/Violet
24	Violet/Brown paired with Brown/Violet
25	Violet/Gray paired with Gray/Violet

Table I

Pair Number	Color Combination
1	Black/Red paired with Red/Black
2	Black/White paired with White/Black
3	Black/Green paired with Green/Black
4	Black/Blue paired with Blue/Black
5	Black/Yellow paired with Yellow/Black
6	Black/Brown paired with Brown/Black
7	Black/Orange paired with Orange/Black
8	Red/White paired with White/Red
9	Red/Green paired with Green/Red
10	Red/Blue paired with Blue/Red
11	Red/Yellow paired with Yellow/Red
12	Red/Brown paired with Brown/Red
13	Red/Orange paired with Orange/Red
14	Green/White paired with White/Green
15	Green/Blue paired with Blue/Green
16	Green/Yellow paired with Yellow/Green
17	Green/Brown paired with Brown/Green
18	Green/Orange paired with Orange/Green
19	White/Blue paired with Blue/White
20	White/Yellow paired with Yellow/White
21	White/Brown paired with Brown/White
22	White/Orange paired with Orange/White
23	Blue/Yellow paired with Yellow/Blue
24	Blue/Brown paired with Brown/Blue
25	Blue/Orange paired with Orange/Blue