


WIRE	24 AWG, MULTI STRAND COPPER, SILVER PLATED, KAPTON INSULATION
MOUNT	ALUMINUM, ANODIZED
ENCAPSULANT	EPOXY, BLACK
OPERATING TEMP.	FROM 0°C TO 160°C
SPECS	ESA/SCC DETAIL SPECIFICATION NO. 4006/001-08  ESA/SCC GENERIC SPECIFICATION NO. 4006

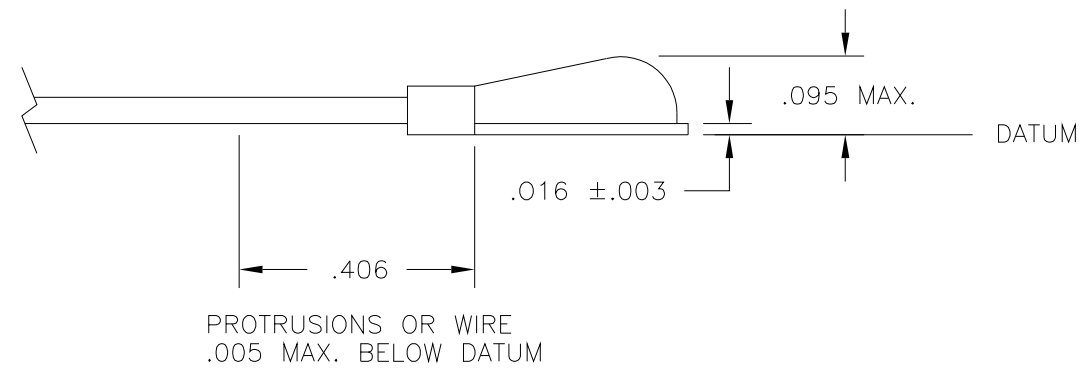

HS 22NOV91

MFP 22NOV91

WJR 11.25.91

THERMISTOR PROBE ASSY.  
OUTLINE

ECO 4309

1 1

4:1

526-31AN08-153

H