





Frequency Tolerance/Stability — ±25ppm Maximum

Operating Temperature Range -10°C to +70°C

TS -1.544M
Nominal Frequency
1.544MHz
Pin 1 Connection
Tri-State (High Impedance)


Duty Cycle 50 ±10(%)

ELECTRICAL SPECIFICATIONS			
Nominal Frequency	1.544MHz		
Frequency Tolerance/Stability	±25ppm Maximum (Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Ouput Load Change, First Year Aging at 25°C, Shock, and Vibration)		
Operating Temperature Range	-10°C to +70°C		
Supply Voltage	3.3Vdc ±10%		
Input Current	8mA Maximum		
Output Voltage Logic High (Voh)	90% of Vdd Minimum (IOH = -4mA)		
Output Voltage Logic Low (Vol)	10% of Vdd Maximum (IOL = +4mA)		
Rise/Fall Time	6nSec Maximum (Measured at 20% to 80% of waveform)		
Duty Cycle	50 ±10(%) (Measured at 50% of waveform)		
Load Drive Capability	15pF Maximum		
Output Logic Type	CMOS		
Pin 1 Connection	Tri-State (High Impedance)		
Tri-State Input Voltage (Vih and Vil)	90% of Vdd Minimum or No Connect to Enable Output, 10% of Vdd Maximum to Disable Output (High Impedance)		
Standby Current	10µA Maximum (Disabled Output: High Impedance)		
RMS Phase Jitter	1pSec Maximum (12kHz to 20MHz offset frequency)		
Start Up Time	10mSec Maximum		
Storage Temperature Range	-55°C to +125°C		

ENVIRONMENTAL & MECHANICAL SPECIFICATIONS		
ESD Susceptibility	MIL-STD-883, Method 3015, Class 1, HBM: 1500V	
Fine Leak Test	MIL-STD-883, Method 1014, Condition A	
Flammability	UL94-V0	
Gross Leak Test	MIL-STD-883, Method 1014, Condition C	
Mechanical Shock	MIL-STD-883, Method 2002, Condition B	
Moisture Resistance	MIL-STD-883, Method 1004	
Moisture Sensitivity	J-STD-020, MSL 1	
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K	
Resistance to Solvents	MIL-STD-202, Method 215	
Solderability	MIL-STD-883, Method 2003	
Temperature Cycling	MIL-STD-883, Method 1010, Condition B	
Vibration	MIL-STD-883, Method 2007, Condition A	



MECHANICAL DIMENSIONS (all dimensions in millimeters)

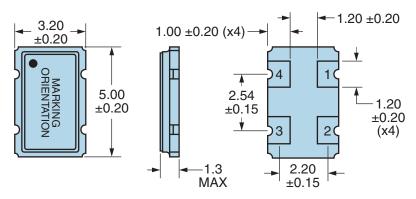


Note: Pin 1 Chamfer not shown.

PIN	CONNECTION
1	Tri-State
2	Ground
3	Output
4	Supply Voltage

LINE	MARKING
1	E1.544 E=Ecliptek Designator
2	XXYZZ XX=Ecliptek Manufacturing Code Y=Last Digit of the Year ZZ=Week of the Year

Suggested Solder Pad Layout


All Dimensions in Millimeters




All Tolerances are ±0.1



OUTPUT WAVEFORM & TIMING DIAGRAM

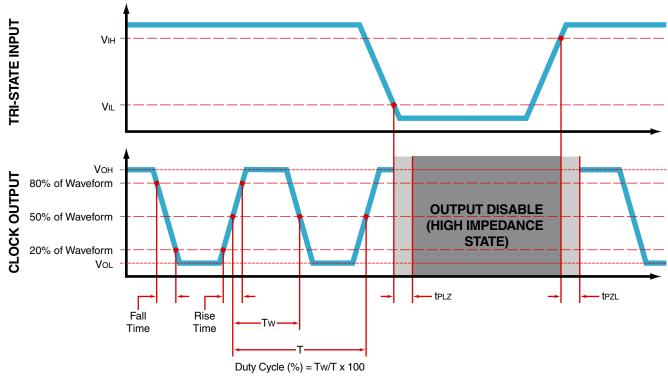

Test Circuit for CMOS Output

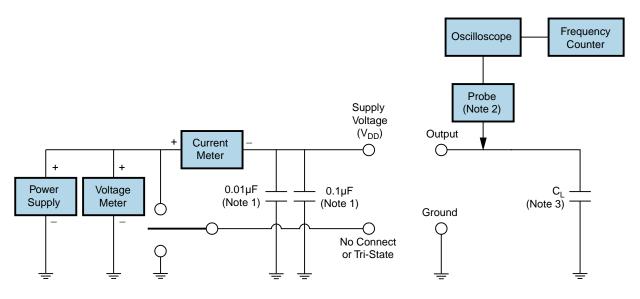

Note 1: An external 0.1µF low frequency tantalum bypass capacitor in parallel with a 0.01µF high frequency ceramic bypass capacitor close to the package ground and V_{DD} pin is required.

Note 2: A low capacitance (<12pF), 10X attenuation factor, high impedance (>10Mohms), and high bandwidth (>300MHz) passive probe is recommended.

Note 3: Capacitance value \dot{C}_L includes sum of all probe and fixture capacitance.



Recommended Solder Reflow Methods



High Temperature Infrared/Convection

T _s MAX to T _∟ (Ramp-up Rate)	3°C/second Maximum
Preheat	
- Temperature Minimum (T _s MIN)	150°C
- Temperature Typical (T _s TYP)	175°C
- Temperature Maximum (T _S MAX)	200°C
- Time (t _s MIN)	60 - 180 Seconds
Ramp-up Rate (T _L to T _P)	3°C/second Maximum
Time Maintained Above:	
- Temperature (T∟)	217°C
- Time (t∟)	60 - 150 Seconds
Peak Temperature (T _P)	260°C Maximum for 10 Seconds Maximum
Target Peak Temperature (T _P Target)	250°C +0/-5°C
Time within 5°C of actual peak (tp)	20 - 40 seconds
Ramp-down Rate	6°C/second Maximum
Time 25°C to Peak Temperature (t)	8 minutes Maximum
Moisture Sensitivity Level	Level 1



Recommended Solder Reflow Methods



Low Temperature Infrared/Convection 240°C

T _S MAX to T _L (Ramp-up Rate)	5°C/second Maximum
Preheat	
- Temperature Minimum (T _s MIN)	N/A
- Temperature Typical (T _S TYP)	150°C
- Temperature Maximum (T _s MAX)	N/A
- Time (t _s MIN)	60 - 120 Seconds
Ramp-up Rate (T _L to T _P)	5°C/second Maximum
Time Maintained Above:	
- Temperature (T∟)	150°C
- Time (t∟)	200 Seconds Maximum
Peak Temperature (T _P)	240°C Maximum
Target Peak Temperature (T _P Target)	240°C Maximum 1 Time / 230°C Maximum 2 Times
Time within 5°C of actual peak (tp)	10 seconds Maximum 2 Times / 80 seconds Maximum 1 Time
Ramp-down Rate	5°C/second Maximum
Time 25°C to Peak Temperature (t)	N/A
Moisture Sensitivity Level	Level 1

Low Temperature Manual Soldering

185°C Maximum for 10 seconds Maximum, 2 times Maximum.

High Temperature Manual Soldering

260°C Maximum for 5 seconds Maximum, 2 times Maximum.